Compress

JULY 1949

PERMANENT FILE

LITERATURE

Return this copy to

Advertising Division
Ingersoll-Rand
Phillipsburg, New Jersey

File _____

X-1850 2M 10-54

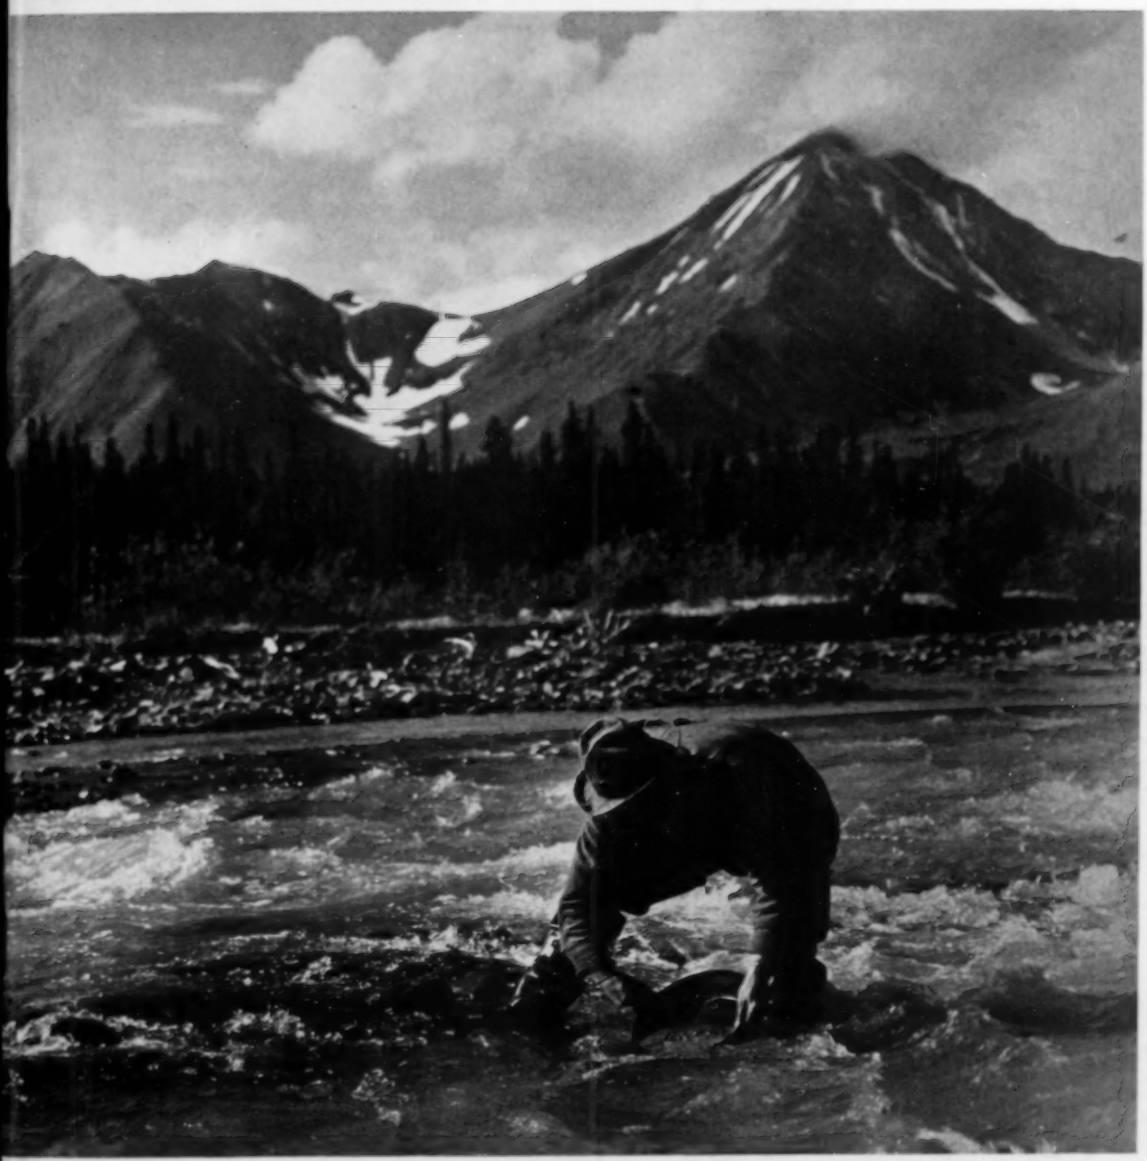

WHITE WATER
GOLD PANNER

A prospector seeks yellow metal in a streambed near the Alcan Highway, Yukon

PHOTO, NATIONAL FILM BOARD, CANADA

VOLUME 54 • NUMBER 7 NEW YORK • LONDON

COPPUS "BLUE RIBBON" VENTILATORS

identified by the blue band

FOR WORKERS'

- *Safety*
- *Health*
- *Comfort*
- *Efficiency*

VANO Design "A" VENTILATOR

Vano Design "A" cooling interior of furnace, supplying fresh air through 10 feet of "Ventube" to provide safety and comfort during repair work.



Vano Design "A" delivering fresh air to cable manhole, expelling sewer gas, making entrance safe in a few minutes.



Vano Design "A" Ventilator plus a few accessories feeds large air volume into tank car, driving out fumes, stagnant or hot air for workers' safety and comfort.



Vano Design "A" suppying fresh air in Reactor Room of Synthetic Rubber Plant.

Vano Design "A" Ventilator supplying fresh air to men working in wing compartments, fuselages, etc.

Powered by a ½ hp motor, and equipped with the exclusive Coppus axial-flow propeller-type fan, this general-purpose blower delivers 1500 CFM of fresh air. It supplies ventilation for tanks, tank cars, drums, vats, underground cable manholes, pipe galleries, airplane wing compartments and fuselages, and other confined places. Weighs only 103 lbs. Uses 8″-diameter flexible canvas tubing ("Ventube").

VANO
DESIGN "C"

VENTILATOR-EXHAUSTER

Vano Design "C" equipped with 8″ discharge tubing removing welding fumes.

Vano Design "C" equipped with two suction lines removing welding fumes for operators' safety.

For withdrawing welding fumes from confined places or directly from the welding rod ...or for expelling fumes or hot air from enclosed vessels. You can get it with 8″ suction inlet for 8″ non-collapsible tubing ...or with multiple inlet nozzles for 5″, 4″ or 3″ suction hose. The discharge outlet takes 8″ "Ventube". Powered by a ½ hp motor, it weighs only 85 lbs.

COPPUS ENGINEERING CORP., 207 PARK AVENUE, WORCESTER 2, MASS.
Please send information on the Blowers that clear the air for Action.

- ☐ in tanks, tank cars, drums, etc.
- ☐ in underground cable manholes.
- ☐ in aeroplane fuselages, wings, etc.
- ☐ on coke ovens.
- ☐ on steam-heated rubber processes.
- ☐ on boiler repair jobs.

COOLING:

- ☐ motors, generators, switchboards.
- ☐ wires and sheets.
- ☐ general man cooling.
- ☐ around cracking stills.
- ☐ exhausting welding fumes.
- ☐ stirring up stagnant air wherever men are working or material is drying.

NAME.....

COMPANY.....

ADDRESS.....

CITY.....

(Write here any special ventilating problem you may have.)

COPPUS "BLUE RIBBON" PRODUCTS—*Designed for Your Industry, Engineered for You*

SCRAM, SCRUD!*

Stay Out of this Vacuum Pump

*Scrud: SCale, RUst, Dirt and other foreign matter in pipe lines

● *Scrud*—a word coined to describe all foreign matter drawn into vacuum pumps—may actually *double* wear on reciprocating parts. This excess wear is caused not only by abrasive particles, but by the washing away of essential lubricants. Staynew Filters *positively prevent* passage of all foreign matter. They frequently save their cost in a few weeks. Good engineering and good business demand Staynew Filters on *all* vacuum lines.



Sectional View of Model CVH

Radial Fin Insert

Operation

Staynew Vacuum Filters clean air by the exclusive Double Action Principle: With filter installed between process and pump, Scrud-laden air enters at (A), striking baffle (B). Here Mechanical Separation takes place, heavier particles of moisture and dirt being driven to bottom of container (C). Then air rises at low velocity thru the Radial Fin Insert which removes the lighter material by Filtration.

All Staynew Vacuum Filters Feature Famous Radial Fin Construction

Radial Fin Construction, an original Staynew development, is the most efficient form ever devised for the removal of foreign matter from pipe lines. Dry-type medium is used, providing positive filtration. *Resistance to flow is low,* due to the large filtering area possible in small space. Filter insert is easily removable and may be cleaned or replaced at low cost.

Complete Range of Sizes

Practically any size pipe line or CFM capacity can be accommodated. Standard sizes range from 60 CFM of free air with inlet and outlet connections of 1″, to 825 CFM, connections 8″. Special models are developed when necessary.

Representatives in Principal Cities

REQUEST BULLETIN B1-A FOR DATA

DOLLINGER MFG. PROTECTOMOTOR U.S. PAT. OFF. STAYNEW FILTERS

DOLLINGER CORPORATION

7 CENTRE PARK • ROCHESTER 3, N. Y.

In Canada: McCarthy and Robinson, Toronto, Ont.
Engineering Equipment Co., Montreal, Que.

THE BACKBONE

of PRODUCTION

the Ingersoll-Rand MOTORPUMP



No matter what the processes in your phase of manufacture, there undoubtedly are pumps involved . . . pumps that are the backbone of your production. When you think of pumps in this light, dependable pumps mean continuous production.

When you talk about dependable close-coupled pumps you're talking about the INGERSOLL-RAND MOTORPUMP line. There are hundreds of sizes and models available to meet a multitude of conditions. These are compact, self-contained units built for heavy-duty service.

Each MOTORPUMP is just what the name implies . . . an electric motor and pump combined. Special motors are equipped with extra-heavy shafts and bearings. The pump with balanced impeller is assembled directly on the motor shaft. This compact construction gives perfect balance, vibrationless operation and extreme rigidity. The MOTORPUMP involves no large installation cost because it requires no special foundation, will operate efficiently in any position, horizontally, vertically, at any angle or on its side. Sizes ¼ to 40 horsepower . . . gallons to 1800 per minute . . . heads to 600 feet.

You can depend on Ingersoll-Rand MOTORPUMPS to ease your pumping headaches. Factory trained pump specialists from coast to coast are always ready to help you and can give you prompt shipment.

COMPRESSORS
TURBO BLOWERS
OIL & GAS ENGINES
PUMPS
CONDENSERS
AIR TOOLS
ROCK DRILLS

Ingersoll-Rand

Cameron Pump Division 423-9
11 Broadway, New York 4, N. Y.

Here's one SURE way
to increase production and cut costs—

Use NORTON Wheels on Your Portable Grinders!

- **Right for Fast Cut**—
  They contain ALUNDUM, 57 ALUNDUM or CRYSTOLON abrasive—one of which is exactly right for extra fast cut on each of your portable grinding jobs.
- **Right for Smooth Cut**—
  They're available with resinoid, vitrified or rubber bond—bonds which help to produce smooth, chatter-free cutting action and to insure long life on every high or low speed grinding job.
- **Right for Size and Shape**—
  Illustrated below are a few of the many sizes and shapes available for handling different portable grinding jobs easily and efficiently.

Contact your Norton abrasive engineer or distributor for details and specifications.

NORTON COMPANY · WORCESTER 6, MASS.
Distributors In All Principal Cities
Consult Your Classified Telephone Directory

W-1244

NORTON ®
ABRASIVES

SAVE MONEY!

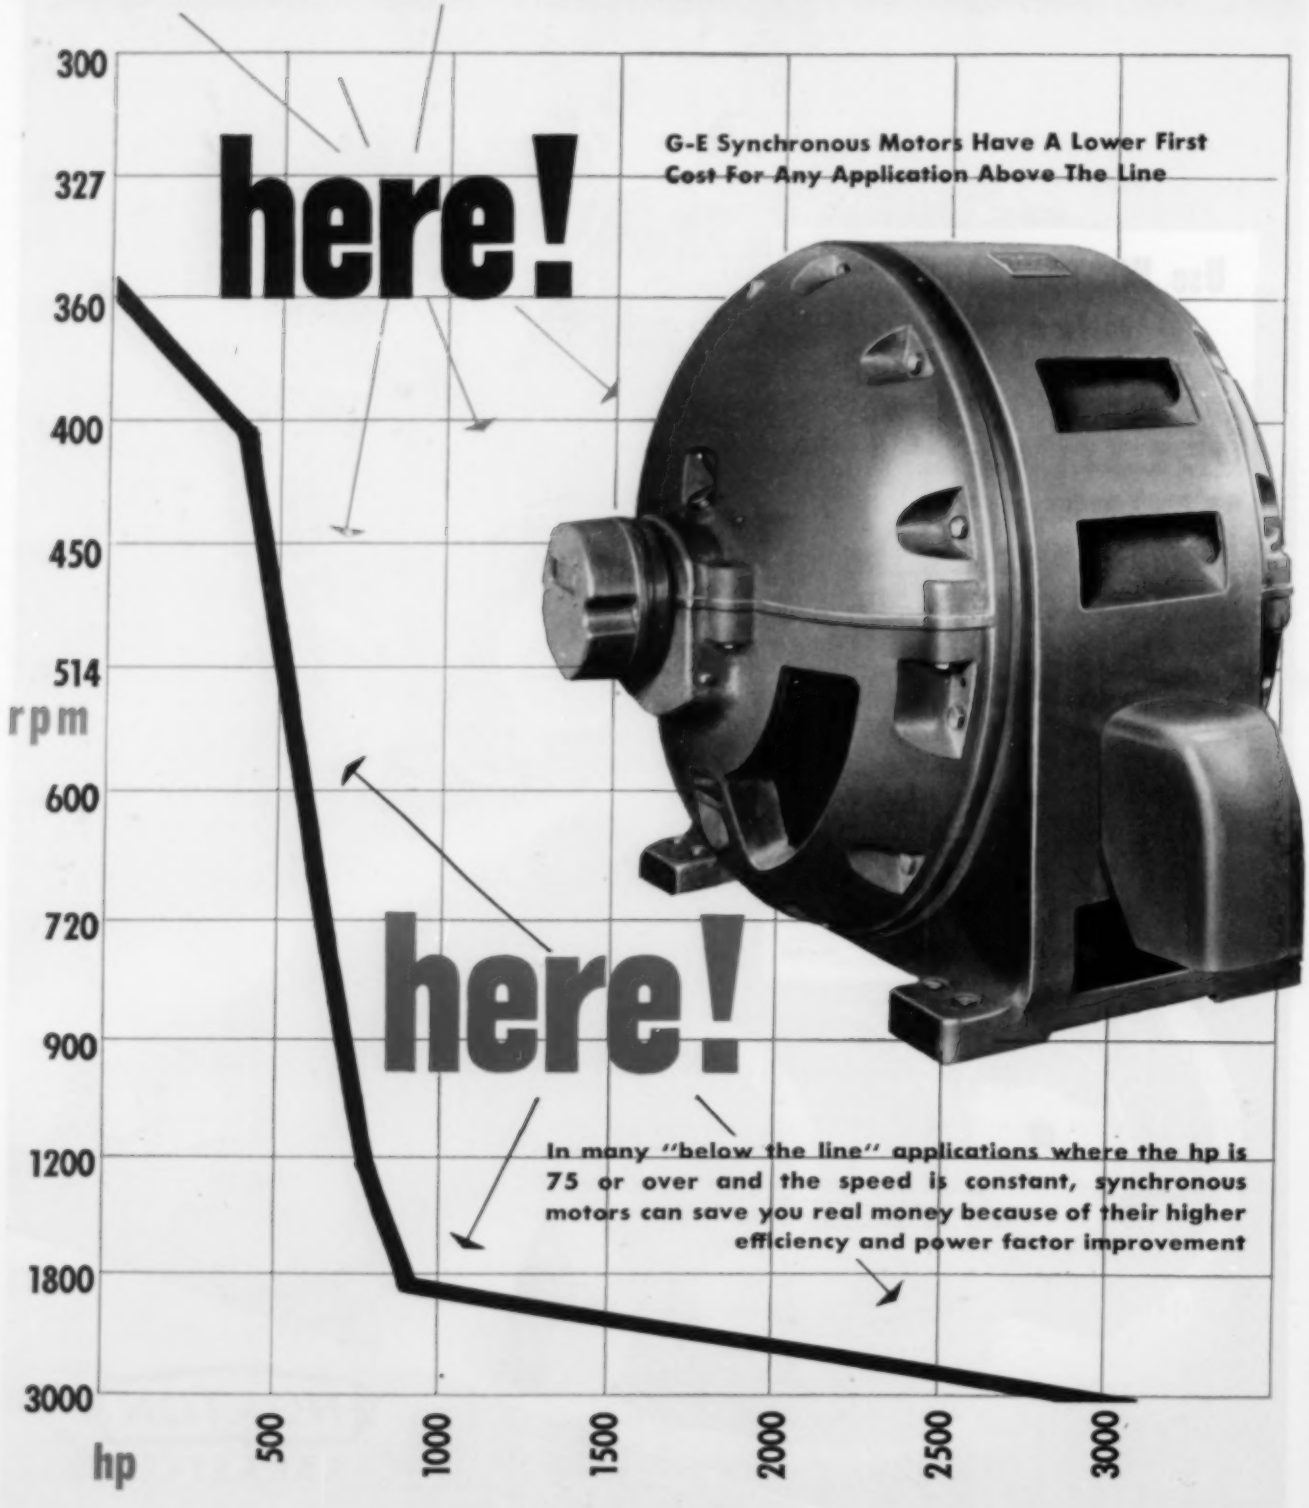
300
327
360
400
450
514
rpm
600
720
900
1200
1800
3000
hp
500
1000
1500
2000
2500
3000
here!
G-E Synchronous Motors Have A Lower First Cost For Any Application Above The Line
here!
In many "below the line" applications where the hp is 75 or over and the speed is constant, synchronous motors can save you real money because of their higher efficiency and power factor improvement

USE GENERAL ELECTRIC SYNCHRONOUS MOTORS

In their natural fields of application, synchronous motors have a *lower first cost* than any other kind of motor!

When you specify General Electric synchronous motors, you get unequalled application engineering by experts in the electrical problems of your industry. They make sure you get the right motor —the motor that will give you the greatest return on your investment.

For your next large, constant speed motor, ask your General Electric sales representative for the full story, and how you can take full advantage of the money saving features of G-E synchronous motors.

GET THE MOST FROM YOUR MOTOR WITH G-E CONTROL

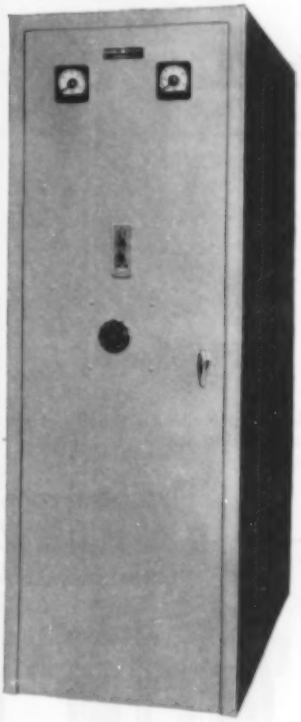

New rotor field circuit prolongs life of your motor and equipment. Offers: precise synchronization (within half a cycle); constant protection without "babying" the motor; automatic and instant field removal at slip cycle.

This factory assembled and tested unit is your assurance of accurate motor performance regardless of type of G-E synchronous motor control you require — full-voltage magnetic, reduced-voltage magnetic, or reduced-voltage semi-magnetic. Standard, heavy duty components are panel mounted, enclosed in a compact, steel cabinet. Short-circuit protection with air-circuit breakers or high-voltage fuses is available. All parts easily accessible, little maintenance required, adjustments easy.

This is the quality control your synchronous motor needs for really efficient operation. It is specially engineered and built for years of service for *your* application. Write for the bulletin in the coupon.

Apparatus Dept., Sec. B770-4, General Electric Company
1 River Road, Schenectady 5, N. Y.

Gentlemen:
I would like more information on the advantages of synchronous motors. Please send me the indicated descriptive literature.

☐ GEA-529D ☐ GEA-5113 ☐ GEC-505

Name ..... Company .....

Street ..... City .....

State .....

GENERAL ELECTRIC



Straight-Flow Port Design reduces fluid turbulence to a practical minimum.



Seat Rings of end-seated type are screwed into the body.

Sure-Grip Malleable Handwheel for non-skid gripping even with heavy gloves.

WALWORTH

iron body gate valves

with screwed or flanged ends

... 8 Outstanding Features

For complete information on these new Walworth Iron Body Valves, see your local Walworth distributor, or write for bulletin 106.



Brass Liner on Glands assures greater resistance to corrosion and scoring.

WALWORTH

valves and fittings

60 EAST 42nd STREET NEW YORK 17, N. Y.

DISTRIBUTORS IN PRINCIPAL CENTERS THROUGHOUT THE WORLD

T-head Disc-to-Stem connection on OS&Y types provides stronger connection, prevents loosening of disc by corrosion.



Bronze Back-Seat Bushings in bonnets of OS&Y valves.



Solid Web Type Disc in OS&Y valves for greater strength and longer service.



Hinged Gland Eye-Bolts on OS&Y valves permit faster, easier repacking under full pressure.

TERRY

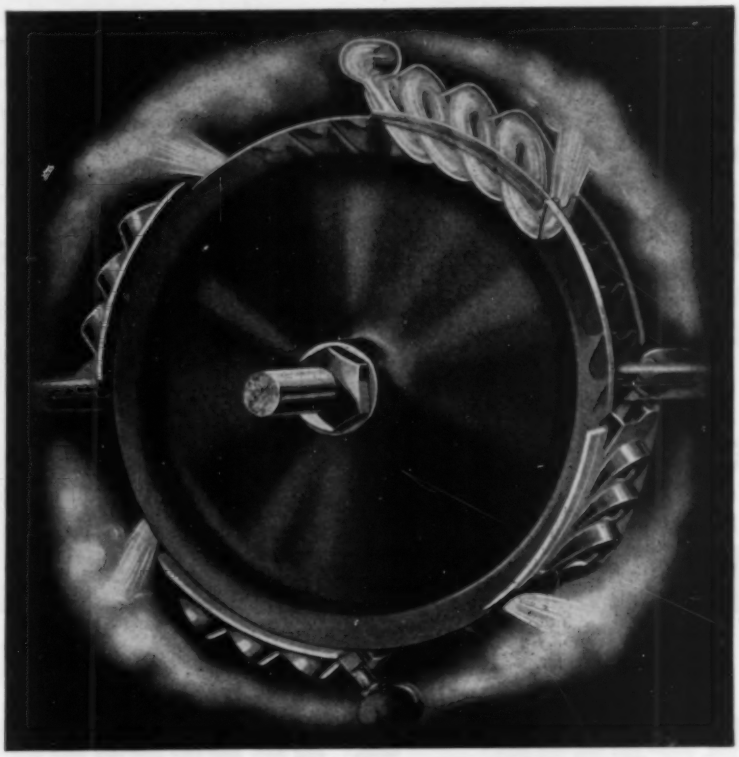

BLADE PROTECTION

Made Possible by Nozzle Location

In the Terry Solid-Wheel Turbine, the steam enters the buckets from the top, not from the side of the wheel, as shown in the illustration above. This permits a one inch clearance on either side of the wheel. In addition, projecting rims on each side of the buckets prevent damage to the blades even though excessive thrust should tend to move the shaft.

This feature and others, as important, are described in detail in Bulletin S 116 which will be sent to you on request.

T-1175

THE TERRY STEAM TURBINE COMPANY
TERRY SQUARE, HARTFORD, CONN.

Varies Speed WITHOUT STOPPING

Another *Texrope* Engineering Triumph!

- Instant speed control at lower cost than ever before
- Covers most speed changing needs from 3 to 20 hp
- Extremely simple — one sheave does all
- Infinitely variable speed — 200% range

SIMPLEST, most economical method of instant speed control ever devised. Simply move motor forward to increase speed and move it back to decrease. The new *Vari-Pitch* Automatic Sheave changes pitch diameter and holds belts at proper tension automatically. All other parts of the drive are standard *Texrope* V-belt drive components.

For details see your A-C Authorized Dealer or Sales Office or write for bulletin 20B7223. *Texrope* and *Vari-Pitch* are Allis-Chalmers trademarks.

A-2709

Sold . . .
Applied . . .
Serviced . . .

by Allis-Chalmers Authorized Dealers, Certified Service Shops and Sales Offices throughout the country.



MOTORS — ½ to 25,000 hp and up. All types.

CONTROL — Manual, magnetic and combination starters; push button stations and components for complete control systems.



PUMPS — Integral motor and coupled types. Sizes and ratings to 2500 GPM.

ALLIS-CHALMERS, 1000A SO. 70 ST.
MILWAUKEE, WIS.

ALLIS-CHALMERS

Operation—"Air-Conditioning"

Dependable laboratory experiments require standardized materials and conditions. Sun Oil Company standardizes laboratory compressed air by removing oil, water, and other contaminants with a Cuno Micro-Klean Filter. Handling 150 cfm (free air) at 100 psi, the Micro-Klean provides the uniformly conditioned air vital to the accuracy of innumerable tests and experiments.

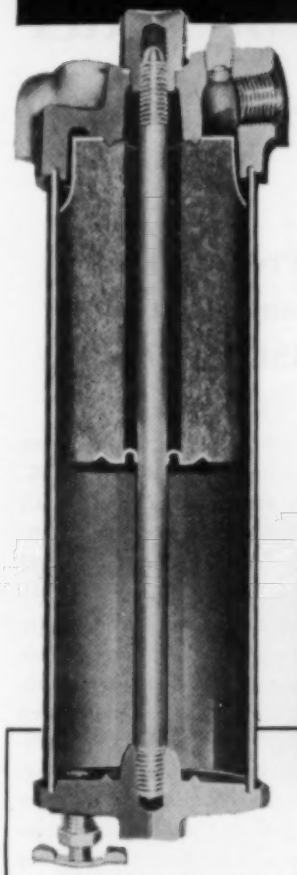

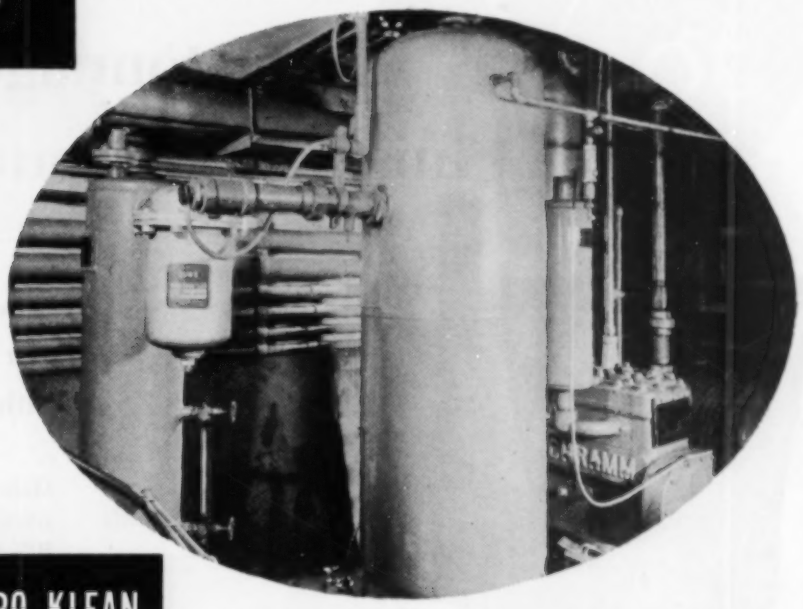

HOW MICRO-KLEAN COUNTERS CONTAMINATION

Air passing into the MICRO-KLEAN Filter first hits the baffle, deflecting some of the moisture down outside the cartridge. Any moisture remaining enters the cartridge where it must make hundreds of sharp turns, impinging on the non-wicking fibres, then draining into the extra-large collection chamber.

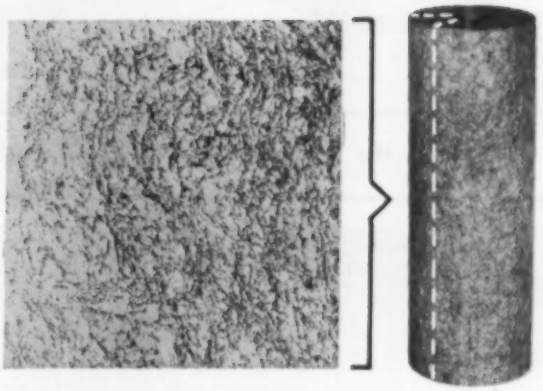

No Wicking or Channeling

An exclusive method of "felting" fibres creates a network of tiny interstices in the cartridge. "Graded density in depth" prevents clogging, doubles dirt-collecting capacity. Resinous impregnation and polymerization eliminates "wicking" and strengthens the cartridge, preventing channeling.

OTHER USES AS STANDARD EQUIPMENT: pneumatic machinery, spray painting, powder dispensing devices, etc. Models to handle volumes in excess of 450 cfm, pressures to 125 psi.

●Your nearby Cuno engineering representative, handling the broadest line of fluid filters, is your best source of unbiased recommendations on fluid filtration . . . he offers you, before and *after* installation, service based on years of experience with engineering filtration systems.

CUNO

Fluid Conditioning

Removes More Sizes of Solids from More Types of Fluids

MICRONIC • DISC-TYPE • WIRE-WOUND

CUNO ENGINEERING CORPORATION
1711 S. Vine Street, Meriden, Conn.

Please send information on Cuno Filter.

Name.....

Position.....

Business Address.....

PLEASE ATTACH COUPON TO YOUR BUSINESS LETTERHEAD

Carset Jackbits

Drill faster, 50% or more
Boost tonnage 20% or better
Finish more rounds per month!

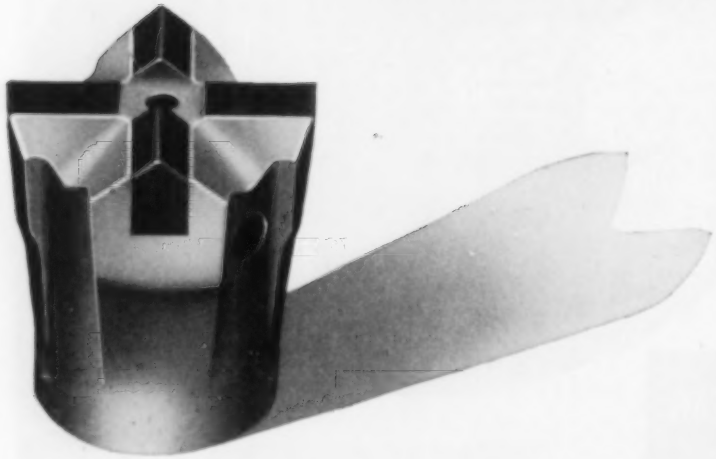

Now it has been Proved that you can do this, and much more, with the I-R CARSET JACKBIT

More than two years of actual field experience have given positive proof of what the CARSET JACKBIT can do – under all drilling conditions, in all kinds of rock. The results today are creating a complete revolution in rock-drilling performance and economy.

For here is a Carboloy-set bit that is repeatedly out-drilling and out-lasting a steel bit usage by 50-to-1, 100-to-1, and in many cases as much as 400-to-1! Uniformly high drilling speed is maintained for the full depth of the hole – without the progressive slackening in speed of quick-dulling steel bits. Bit changing is practically eliminated, longer steel changes can be used, and single-gauge holes can be drilled to any practical depth. This means more efficient drilling cycles, more rock or ore broken per shift – usually *20%* or more.

For the complete story on the CARSET JACKBIT, write today for your copy of our new 36-page, pocket-size catalog, Form 4091.

HERE ARE A FEW TYPICAL REPORTS ON CARSET PERFORMANCE

A MINING COMPANY, drilling in a very hard quartzite, reports that CARSET JACKBITS have so multiplied drilling speed that miners can now drill and blast on the same shift. With steel bits, blasting previously had to be done on the second shift. This customer has converted to CARSET JACKBITS 100%.



ON A LARGE DAM PROJECT, 2" CARSET JACKBITS were used with 4" Wagon drills operating in hard dense basalt. These bits drilled 24-ft. holes in 22 minutes, while steel bits previously used required 66 minutes for an 18-ft. hole (with 10 bit changes). Footage was increased from 120 to 261 ft. per shift.



IN A GRANITE QUARRY, CARSET JACKBITS have given such outstanding performance that steel bits are no longer used. Previously, with quick-dulling steel bits, the bit reconditioning shop had to be run two 8-hour shifts a day. This operation has now been almost eliminated.



A MINING COMPANY, in driving a 12 x 20 foot 97-hole heading in taconite, required an average of 49.8 hours to pull a 5-foot round. With CARSET JACKBITS they pulled 6½-foot rounds and cut this time to 18.5 hours. Accurate cost records showed a direct saving of $92.69 per foot of drift, or $602.48 per round.

manufactured exclusively by

409-15

Ingersoll-Rand

11 BROADWAY, NEW YORK 4, N. Y.

A NEW REFRIGERATION CONDENSERS BOOKLET BY Vogt

Write FOR BULLETIN RC-1

Here's pertinent, up-to-the-minute information on our complete line of refrigeration condensers . . . a 24 page booklet showing types and sizes designed to deliver low temperature liquid with the lowest condensing pressure.

Vogt Refrigeration Condensers are fabricated from top quality plates, tubes, pipes, forgings, and castings by skilled workmen in modernly equipped shops. Units are designed, tested and stamped to A.S.M.E. Code requirements.

Vogt FOR BETTER REFRIGERATION

HENRY VOGT MACHINE CO., LOUISVILLE 10, KY.

BRANCH OFFICES: NEW YORK, PHILADELPHIA, CLEVELAND, CHICAGO, ST. LOUIS, DALLAS

*LCUW

These letters stand for Low Cost per Unit of Work — the *real* yardstick in measuring wire rope economy.

Once in a while you may run across a wire rope that's lower in first cost than Bethlehem's. But with wire rope as with anything else, first cost isn't the true measure of economy. The rope with the higher price tag may be much more economical in the end — because of the longer, better service it gives. On the basis of long-range economy — *true* economy — we'll stack Bethlehem rope against the field.

Cost per Unit of Work is a flexible term, varying with different industries. It can mean the rope cost per yard of rock moved by a power shovel; the rope cost per ton of coal pulled up a hillside; or the rope cost per ton-mile in oil-country drilling. But however you use wire rope, whatever your system of records, you can be sure of this: Bethlehem wire rope means *low* Cost per Unit of Work.

That's because the Bethlehem product is a quality product all the way through — one that is conscientiously made from crown wires to core.

BETHLEHEM STEEL COMPANY
BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation
Export Distributor: Bethlehem Steel Export Corporation

*LOW COST PER UNIT OF WORK

ON THE COVER

MENTION of Yukon Territory usually brings thoughts of the Klondike gold rush, one of the greatest of the world's many stampedes for the yellow metal. Although gold has lost caste, so to speak, among nations, it is still as much wanted as ever by individuals. Consequently, the hunt for it goes on unabated. Whereas most prospecting pictures show a panner working on the edge of a stream in quiet water, the man on our cover is right out in the swiftly moving current.

•

IN THIS ISSUE

AS WAS expected by its creators and expressed in its name, the Quarrymaster drill is being used principally in quarrying and open-pit mining. That it can be of service in other fields is shown by its performance on a road-building job in New England. There an ingenious contractor drilled blast holes with it on sections where the depth of cut and other conditions did not favor traditionally used wagon drills. Noteworthy savings resulted. Page 164.

•

AMONG the great names in the field of furniture designing that Scotland has bequeathed the world are Chippendale, Sheraton, Adams, and Hepplewhite. Endeavoring to carry on in their tradition is Neil Morris, 31-year-old head of a company that bears his name. He has created fine furniture for royalty, as well as for some of the largest ships afloat. His major effort, however, is directed towards mass production of pieces at prices the average family can afford to pay. In doing this he has turned to the use of compressed air on a large scale. Page 169.

•

LONG BEACH in California is one of the few cities that have sources of natural gas within their boundaries. However, there are many intermediate steps in getting the gas from wells to burners. The city has just completed improvements in its distribution set-up, which included the modernization of a compressor plant. Page 176.

•

BELATED attention is paid to Shasta Dam cableway, a gigantic aerial transportation system that moved an average of 4000 tons of concrete daily during the 4½-year construction period. Page 174.

•

CORRECTION

THE bridge shown as illustration No. 1 on page 154 of our June issue and described as the Golden Gate Bridge is actually the San Francisco-Oakland Bay structure.

Compressed Air Magazine

COPYRIGHT 1949 BY COMPRESSED AIR MAGAZINE COMPANY

VOLUME 54 **July, 1949** NUMBER 7

G. W. MORRISON, *Publisher*
C. H. VIVIAN, *Editor* J. W. YOUNG, *Director of Advertising*
ANNA M. HOFFMANN, *Associate Editor* J. J. KATARBA, *Advertising Mgr.*
A. W. LOOMIS, *Assistant Editor* JOSEPH C. DILTS, *Advertising Sales*
WALTER P. GILLINGHAM, *Assistant Editor*
D. Y. MARSHALL, *Europe*, 243 Upper Thames St., London, E. C. 4.
F. A. MCLEAN, *Canada*, New Birks Building, Montreal, Quebec.

EDITORIAL CONTENTS

The New Hampshire Turnpike—*Walter P. Gillingham* 164
Harvesting Oysters with Suction 168
Air Power Speeds Furniture Building—*William Boyle* 169
Shasta Dam Cableway Now a Memory 174
New Compressor Plant for Long Beach, California, Gas System 176
Quarrying Hard Trap Rock 178
New Mill Makes Stainless and Alloy-Steel Strip 179
Tidbits from Corn 180
Air Power Expedites Boring of Holes for Pole Anchors 181
Rain Repellent for Airplane Windshields 181
This and That 182
Editorials—Development of Alaska—British Mining Conclave—Books for Europe 183
Mucking by Air Lift 184
Light-Duty Trimmer 184
Torch-Tailoring a Ship 184
Industrial Notes 185
Industrial Literature 188

ADVERTISING INDEX

Air-Maze Corp. 29
Allis-Chalmers 10, 22
Barco Mfg. Co. 30
Bethlehem Steel Co. 14, 24
Blaw-Knox Co. 35
Compressed Air Magazine 29
Cook Mfg. Co., C. Lee 21
Coppus Engineering Corp. 2nd Cover
Crane Co. 26
Crucible Steel Co. of America 19
Cuno Engineering Corp. 11
Dollinger Corp. 3
Eimco Corp., The 31
General Electric Co. 6, 7, 16
Goodall Rubber Co. 33
Goodrich Co., B. F. 20
Hose Accessories Co. 33
Hunt & Son, Inc., C. B. 34
Industrial Clutch Co. 25
Ingersoll-Rand Co. 4, 12, 18, 28, 3rd Cover
Maxim Silencer Co. 34
Naylor Pipe Co. 17
New Jersey Meter Co. 30
Norgren Co., C. A. 29
Norton Co. 5
Square D Co. 33
Terry Steam Turbine Co., The 9
Texas Co. ..... 4th Cover
Timken Roller Bearing Co., The 23
Victaulic Co. of America 15
Vogt Machine Co., Inc., Henry 13
Wagner Electric Corp. 27
Walworth Co. 8
Westinghouse Electric Corp. 32
Wisconsin Motor Corp. 34

A monthly publication devoted to the many fields of endeavor in which compressed air serves useful purposes. Founded in 1896.

CCA Member Controlled Circulation Audit

Published by Compressed Air Magazine Co., G. W. MORRISON, *President;* C. H. VIVIAN, *Vice-President;* J. W. YOUNG, *Secretary-Treasurer.*
Business, editorial, and publication offices, Phillipsburg, N. J.
Advertising Office, 11 Broadway, New York 4, N. Y., L. H. GEYER, *Representative.*
Annual subscription: U.S., $3.00; foreign, $3.50. Single copies, 35 cents.
COMPRESSED AIR MAGAZINE is on file in many libraries and is indexed in Industrial Arts Index and in Engineering Index.

The New Hampshire Turnpike

Self-Contained Quarrymaster Drill Using 5½-inch Detachable Carset Bit Speeds Excavation Work in Heavy Cuts

Walter P. Gillingham

DRESSING LARGE BIT

The 5½-inch-gauge Carset bits used with the Quarrymaster drill are reconditioned as shown here, the Carboloy inserts being dressed with a hand-held air-operated grinder.

NEW ENGLAND'S dream of a 4-lane highway stretching from New York City to Portland, Maine, is one step nearer reality with the construction of the New Hampshire Turnpike. This superhighway, now being built across the narrow neck of land which forms the seacoast of New Hampshire, will connect on the north with the Maine Turnpike and on the south with the existing roadway system of the State of Massachusetts. It will afford through traffic a direct and time-saving route across New Hampshire.

Motorists leaving New York City for points in New England can now travel the first part of their journey on 4-lane highways from the very heart of the metropolis. The Merritt Parkway and its northern extension, Wilbur Cross Parkway, reach across the State of Connecticut nearly to the Massachusetts border. Farther north, the Maine Turnpike begins at Kittery and extends to Portland. The gap between the latter and the Wilbur Cross Parkway is being narrowed by the New Hampshire Turnpike, and sometime in the future similar roads will span the remaining distance so that automobiles can cover the 300-odd miles between New York City and Portland practically uninterrupted by cross traffic, stop lights, and reduced-speed zones.

The New Hampshire Turnpike begins at a point on the Massachusetts-New Hampshire line near Smithtown and ends in Portsmouth at the Maine-New Hampshire interstate bridge. When finished, it will be approximately 15

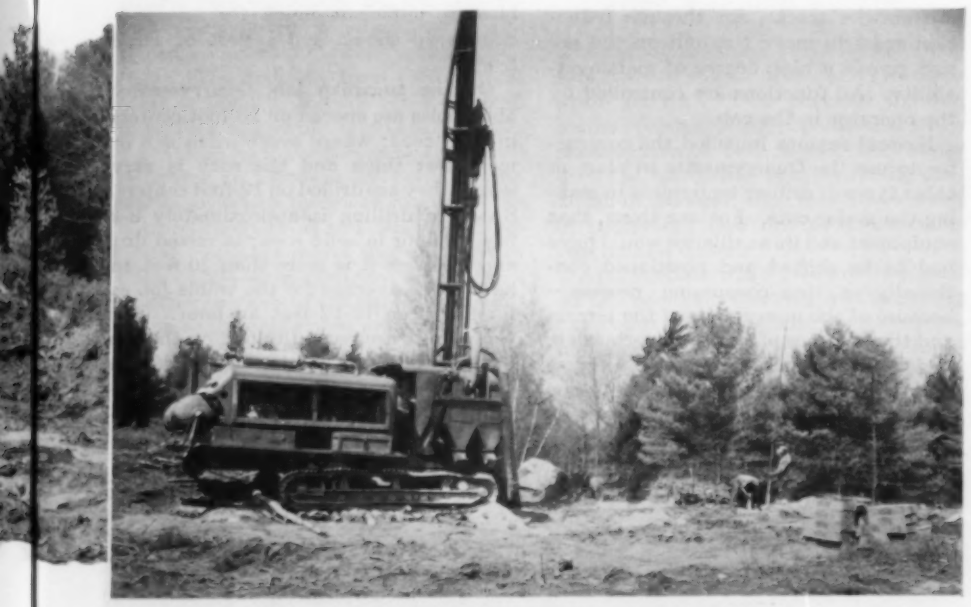

EFFECTIVE DRILLING COMBINATION

Wagon drills have long been conventional equipment on roadbuilding jobs and eight of them are utilized on this one. However, the contractor figured that it would be less expensive to drill the heaviest cuts with the new deep-hole Quarrymaster, and results are confirming his judgment. Two pictures of the rig are shown here. In the one at the left the workman in front of the machine has just put in place the hooded end of the flexible tubing that carries rock cuttings to the storage hoppers. A pile of cuttings can be seen in the foreground. The man on the side of the machine is checking the compressors, while the operator, hidden in the cab, directs the drilling. Just above is another side view of the Quarrymaster with two of its crew (right) loading holes. Two FM-2 wagon drills, using 2-inch Carset Jackbits and working on one of the smaller cuts, are shown at the top.

the neighborhood of 7½ million dollars.

The contract for the job was awarded to The Savin Construction Corporation of East Hartford, Conn., last fall on a bid of $5,250,000 and involves the following major operations: Clearing and grubbing 240 acres of land along the 300-foot right of way; the excavation of 100,000 cubic yards of muck and 1,111,600 cubic yards of unclassified material; the moving of 1,000,000 cubic yards of earth and 600,000 cubic yards of gravel from borrow pits; the paving of the two roadways; and the erection of the toll and administration buildings. Date of completion was set as July 1, 1950.

The contractor had originally intended to spend the winter clearing and grubbing the land and doing as much earth and rock removal as he could before the usually rigorous New England winter put a stop to operations. But as it turned out, the weather was frequently mild and sunny and permitted him to bring in earth- and rock-moving equipment to do most of the heavy excavating during the winter months. As a result, he is now some three months ahead of schedule, and the work is progressing rapidly.

In order to obtain the grade desired, it was necessary to make eleven cuts along the right of way. These ranged in depth from 5 to 35 feet and involved the handling of from 5000 to 60,000 cubic yards of material. Solid rock was encountered in many places, a total of 225,000 cubic yards being ledge rock. Elsewhere, the removal of overburden, consisting of dirt with small and large boulders intermixed, presented drilling difficulties.

The contractor deviated from conventional practice in excavating the major cuts. Instead of attacking them with wagon drills and doing the work in a series of lifts, he proceeded to put down large-sized blast holes to roadway grade with an Ingersoll-Rand Quarrymaster drill, taking out the cuts in a single lift. The Quarrymaster is a portable, self-contained rock drill designed primarily for drilling large-diameter blast holes in quarries, open-pit mines, coal-stripping operations, construction projects, etc. It started on the job on December 15, 1948, and has been working steadily since then ahead of the power shovels and rock-moving equipment. The results obtained with it have more than justified its use.

Mounted on tractor treads, the Quarrymaster can travel overland under its own power at a speed of 1 mile an hour and can negotiate grades up to 30 percent. When spotted in drilling position, it is leveled by three hydraulic jacks, two in front and one at the rear. These support the unit while it is operating, preventing interference through vibration and insuring correct hole alignment. It works rapidly, putting down holes up to 6 inches in diameter to depths of approximately 70 feet.

The drilling element is a large-sized piston-type machine that delivers about 200 blows a minute. The drill steel, made

LOCATION MAP

The 15-mile New Hampshire Turnpike, indicated by the heavy dotted line in the right upper corner, will add another link to the 4-lane highway that will eventually extend from New York to Portland, Maine. Existing sections are shown in solid lines. The connection between the Merritt and Wilbur Cross parkways at New Haven is now nearing completion.

miles long and will consist of two 24-foot bituminous-macadam roadways separated by a 24-foot grassy strip. Structures to be erected include seventeen concrete bridges and overpasses, an interchange station complete with tollhouse, and an administration building. The total cost of the project will be in

PHOTO NEW HAMPSHIRE STATE HIGHWAY DEPARTMENT

MIDWINTER EXCAVATION WORK

This view, taken early in February of this year, gives an idea of the unusually mild New England winter that permitted heavy earth-moving machines to operate without interruption. Normally the ground is frozen and covered with a heavy blanket of snow that makes excavating impossible.

of hollow alloy steel 35 feet long and fitted with 5½-inch Carset bits is automatically rotated with each stroke. The hole is kept clean of cuttings by passing air from the drill down through the hollow rod. Vacuum, drawn on a hood that fits around the drill steel at the collar of the hole, picks up the cuttings as they emerge and delivers them through a hose to storage hoppers on the machine.

The 5½-inch Carset bit was developed for the Quarrymaster by Ingersoll-Rand Company. This type of cutting tool has proved itself to be considerably more economical than the regular steel bit in cost per yard, in addition to other advantages. The Carset stays sharp longer, increasing drilling speed as well as over-all productiveness of the machine by eliminating frequent bit changes. Furthermore, the virtual absence of gauge loss insures a hole of uniform diameter throughout. Reconditioning requires only a small hand-held pneumatic grinder operated by compressed air obtainable from the Quarrymaster, thus obviating the handling, sharpening, and heat treating of steel bits in shops at considerable expense.

Two Mobilair portable compressors, stripped of their wheels and running gear and fastened to the frame, supply power for all the operations of the Quarrymaster. A 5-cylinder, reversible-type air motor, with a lifting capacity of 16 tons, raises and lowers the drill on the vertical tower by means of a roller chain. The same motor also serves to lay the tower back onto the machine when the unit is in transit, or when an overhead obstruction in a short haul makes this action necessary, and to raise it again when the new drilling location is reached. Two similar air motors, one on each of the crawler tracks, act through reduction gears to move the unit on the job and give it a high degree of maneuverability. All functions are controlled by the operator in the cab.

Several reasons impelled the contractor to use the Quarrymaster in place of other types of drilling equipment in making the major cuts. For one thing, that equipment and its auxiliaries would have had to be shifted and positioned continually—a time-consuming process—because of the unevenness of the terrain and the presence of stumps, overburden, and other obstructions left in the course of clearing the wooded land. The Quarrymaster, traveling under its own power and carrying its own air supply and accessory equipment, would lose little time in reaching a drilling site and, when finished there, in moving on to the next one. This did not apply to the low cuts, for which wagon drills were considered suitable.

However, the principal factor was that the Quarrymaster, under the prevailing conditions, could effect appreciable savings on a cost-per-yard basis. Following normal clearing and grubbing, no stripping or removal of stumps and burden involving heavy expenditures would be required. Besides, cold and wet weather would interfere little if any with the work because the operator is protected and able to keep the drill in full production in well-nigh any kind of weather. Normally a crew of three men, or under the worst of moving conditions only four, are needed to do all the drilling, loading and blasting, servicing, shifting and spotting of the machine, and sharpening of bits. The operating economies are obvious when three workmen on a bank and one machine are seen drilling and blasting sufficient muck for one 2½-cubic-yard shovel and a fleet of large trucks.

On the turnpike job, Quarrymaster blast holes are spaced on 15-foot centers in solid rock; where overburden is 6 or more feet thick and the rock is very seamy they are drilled on 12-foot centers. Speed of drilling is approximately 8-9 feet an hour in solid rock; in mixed dirt and boulders it is more than 20 feet an hour. The average for the whole job so far has been 10-12 feet an hour. The Carset bits are reconditioned on the job by dressing the cutting faces of the tungsten-carbide inserts with a pneumatic grinder that takes air from the re-

BIG CUT

About 2 miles north of the Massachusetts state line where the last major cut is being taken out. Its maximum depth is 20-22 feet. The picture shows a Bucyrus-Erie power shovel loading broken material into rear-dump Euclid trucks. The Quarrymaster drill is in the distance. It began work about two weeks before the shovel did and has kept sufficiently ahead of blasting to be out of range of damage.

ceiver of one of the compressors on the Quarrymaster. The interval between sharpenings is about 100 feet in very hard rock and 600-700 feet in soft rock and overburden.

Holes are loaded with 25-pound cartridges of Hercules 60 percent special gelatin dynamite. The amount used depends upon the nature of the ground, the depth of the hole, and the number per blast. Each of the two largest shots set off to date took 10,000 pounds of explosives distributed among 44 holes, while 4350 pounds placed in 63 holes sufficed for the smallest cut. The average quantity used comes to approximately 1¼ pounds per cubic yard of material broken.

The Quarrymaster drill works ahead of a Bucyrus-Erie 2½-cubic-yard power shovel which loads 1300 to 1500 yards daily. Both are on a 10-hour-a-day schedule; but at one spot, where exceptionally hard rock was encountered, the big drill was forced to put in twenty hours to keep the shovel busy. The two largest cuts excavated by the Quarrymaster-shovel combination each contained about 60,000 cubic yards of material. The first one, from 18 to 35 feet deep, is finished, and the other, from 20 to 22 feet, is nearing completion.

Dirt and rock scooped up by the shovel is carried to fill areas by Euclid dump trucks, of which there are twenty of the bottom-dump type and ten rear-dump units. Six other power shovels, most of them of 2½-yard capacity, are at work on other sections of the contract. In addition to the equipment mentioned there are six cranes, nineteen bulldozers, twelve Tournatrailers, eight Tournapulls, one Tournadozer, one Euclid loader, six Mack trucks, three trailers, three graders, eleven portable compressors, twelve wagon drills, and two dual-drum pavers. Two portable lighting plants permit night operations when necessary, and two lubrication trucks keep the machinery in top running condition in the field. The total investment in equipment now on the job exceeds two million dollars.

Approximately 265 men are employed on the project. Clearing and grubbing have been completed, and operations are underway the entire length of the highway. The contractor expects to finish excavating and borrow work by July 1, when paving is scheduled to start.

PHOTO NEW HAMPSHIRE STATE HIGHWAY DEPARTMENT

LOADING BLAST HOLES

Workmen loading dynamite into Quarrymaster holes 5½ inches in diameter and 35 feet deep. In each is placed 250 pounds of dynamite of 60 percent strength packed in 25-pound cartridges.

"LUBE" TRUCK

One of two trucks that transport greases, lubricating oils, and other supplies to the earth-moving equipment. Each carries an Ingersoll-Rand D-60 portable compressor, minus wheels and gear, that is mounted on the truck bed and furnishes air mainly for inflating tires. Hand-held grinders and other tools permit the making of minor repairs in the field.

Bituminous macadam 3 inches thick will make up the wearing surface of the traffic lanes and will rest on a 4-inch base of crushed stone, of which some 120,000 tons will be required. The paving job itself will call for the use of 1,700,000 gallons of bituminous material. About 210,000 linear feet of stone curbing will be needed; more than 13,000 cubic yards of concrete will be poured in constructing the traffic circle at the north end of the turnpike and the interchange station near the center, and for other purposes; around 450 catch basins will be provided; and in excess of 101,000 feet of pipe of all kinds and sizes will be used for drainage, etc. The center strip and the sides of the roadway, an area of approximately 500,000 square yards, will be covered with loam and seeded to grass.

The New Hampshire Turnpike was designed by Daniel H. Dickinson, chief engineer of the New Hampshire Highway Department, and is being constructed under his direction. Mr. A. I. Savin, president of The Savin Construction Corporation, makes frequent trips from the company's offices in East Hartford, Conn., to the scene of operations to check on progress. He commutes by private plane, making him one of the few heads of contracting firms in the country to use this mode of transportation.

Mr. Savin's staff on the job includes B.A. Wilder, general superintendent; Lloyd F. McCarthy, project manager; Herb Savin, his son, superintendent; Bob Staples, engineer; Bob Work, equipment manager; Simon LaMarre, Jr., master mechanic; L. McKillop, timekeeper and office manager; Ralph Howard, blasting foreman; and Alva Hausenfluck, drill foreman on the Quarrymaster.

Harvesting Oysters with Suction

READY FOR WORK

The oyster boat "Rowe," right, with its suction attachment about to be lowered to sweep the ocean floor. Above is a close view of the clawlike nozzle through which the oysters and marine creatures that prey upon them enter the pipe line through which they are drawn to the surface together with a stream of water.

A MODERN method of harvesting oysters—picking them up from the sea bed where they have been cultivated—is reported by H. C. Rowe & Company, New Haven, Conn., which has been in the oyster business since 1868. The equipment used resembles a giant vacuum cleaner and is pulled along by a self-propelled vessel to which it is attached by a long-radius steel elbow. A dredge blade and nozzle, which has an opening approximately 6 feet wide and 7 inches high, travels along the ocean floor behind a dolly with a rubber tire.

The suction line consists mainly of a 40-foot length of 10-inch-diameter steel pipe which, to give the system the greatest possible flexibility when in service or stored, is connected to the nozzle and to the elbow by hose supplied by The B. F. Goodrich Company. The necessary suction is induced by a centrifugal pump that delivers 3600 gpm. with a total head of 180 feet. The flow is converted into a jet that passes into an eductor and creates a vacuum in the pipe line sufficient to lift 2400 gallons of water and oysters a minute. The two streams merge in the throat of the eductor and are forced through a hood discharging onto a moving wire screen. The water is returned to the sea over stainless-steel watersheds, while the bivalves are carried by the wire-mesh conveyor to the ship's loading space.

As the nozzle is dragged along the ocean bottom, virtually everything within its suction range is drawn in, including oyster drills (boring snails), one of the oyster's worst enemies. This pest, the company believes, can be largely eradicated by using the equipment to prepare beds for the planting of spat—oyster seed. Actually, in clearing 40 acres for the purpose, it destroyed more than 50,000 of these creatures, thus materially raising the odds in favor of the survival of the spat and, incidentally, a large marketable yield.

Another advantage of the Rowe suction system is that it is entirely mechanical; once it starts operating, it runs virtually by itself. According to Rowe & Company, less than half the number of men are needed to harvest the same amount of oysters by the new than by the old method. In the case of the latter, steel dredges, dropped over a vessel's side, are pulled up and emptied on the deck, where more workers transfer the haul to storage.

The *Rowe*, from which the suction equipment operates, is a converted Army freight-supply vessel. It is 114 feet long, powered by twin diesel engines, averages 11-12 knots, and has a cargo capacity of 3000 bushels. Unloading is done by bucket and belt conveyors, which discharge the oysters onto a dock conveying system for transfer to a processing plant. The rate of catch is 1000 bushels an hour, and since the ship was put in service it has harvested approximately 225,000 bushels.

CLEANING SHUCKED OYSTERS

As the opened oysters are gently washed in stainless-steel tanks at the Greenport, N. Y., plant of Bluepoints Company, Inc., the fresh water is agitated with compressed air to dislodge particles of shell and other adhering substances.

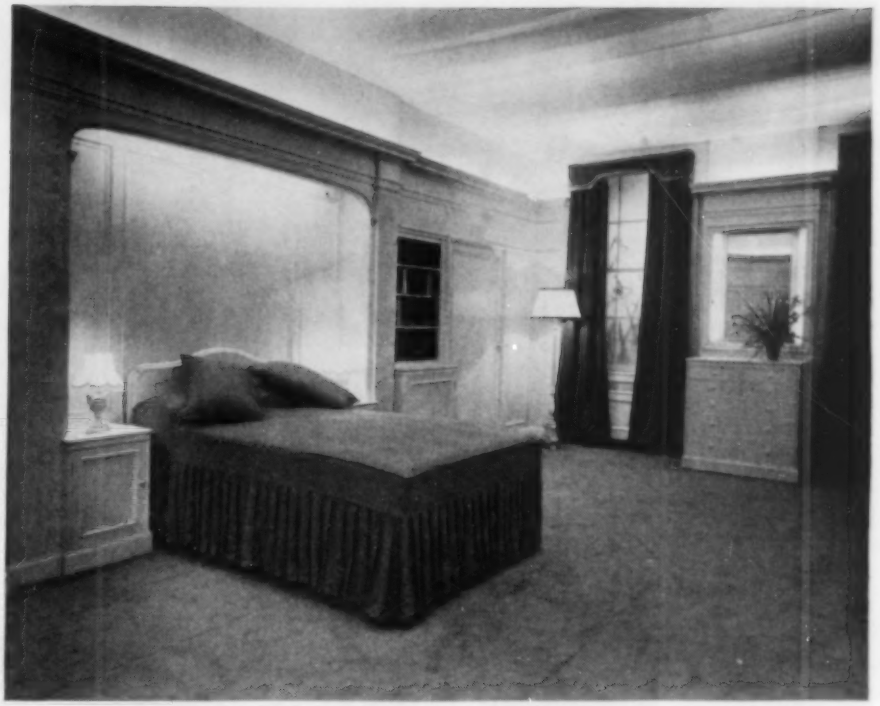

BEDROOM OF THE DUKE OF EDINBURGH

Hundreds of Glasgow people contributed from sixpence to many pounds each towards this wedding gift from the city to Princess Elizabeth and the Duke of Edinburgh. Preparations began well in advance of actual production with the measurement of the 28x17-foot room in Clarence House and the making of drawings. The Regency paneling and the fourteen pieces of furniture are of selected kiln-dried white Scottish sycamore. Each article was styled by Neil Morris, and 70 men in his furniture factory worked with meticulous care for nine months to get every detail right. Palace authorities were consulted regularly as the suite took form, and the royal couple gave final approval to the furnishings.

Air Power Speeds Furniture Building

William Boyle

COMPRESSED air has done much to bring the ancient art of wood manufacture to a stage where it is now possible to combine quantity production with high-quality workmanship such as is generally associated only with individual pieces made by skilled craftsmen. This conversion from hand to machine methods is well exemplified in the factory of H. Morris & Company, Ltd., of Glasgow, Scotland, where precision engineering, conveyor systems, special jigs and fixtures, and pneumatic tools and equipment have resulted in placing the firm in the forefront in the mass production of fine paneling, furniture, and architectural woodwork for luxury hotels and ocean-going liners like the *Queen Mary* and *Elizabeth*.

Another contributory factor in this transformation is the "making" of wood itself—laminated wood for purposes where beauty or lightness are sought, and heavy compressed wood for industrial and other uses where strength and toughness are of prime consideration. Because of its modern facilities that enable it to manufacture these materials and to convert them into a great variety of products, the company played an important part during the past conflict when shortages of steel and seasoned lumber threatened to interfere with the war effort. Miles of decking was required for the barges upon which the success of the Normandy invasion depended. Morris helped to fill the breach by supplying plywood decking. Laminated construction served the naval architect in still another way. Made up into thick doors, an especially lightweight wood (ligher than cork) reduced the dead weight of certain ships by as much as 25 tons.

Airplane designers also turned to this weight-saving material, of which huge quantities of boatshaped gasoline tanks were produced by the concern for Mosquito craft. Known as jettison tanks, they were detachable, and each had a detonator in its nose. During flights over enemy territory they supplied the planes with emergency fuel; upon reaching the targets they were released, the residue gasoline being exploded by the detonator on contact with an object. When returning to their bases, the machines drew on the fuel in their own tanks.

Compressed wood is suitable for applications that were hitherto restricted to metal because it can be exposed to stresses such as the latter alone was considered capable of withstanding. The material has been made into gear wheels in the Morris plant and been found to lend itself well to noiseless and oil-less operation. Experiments indicate that there is a wide field for it in the building of textile and other machinery, where metal for certain parts has limitations, and likewise in the manufacture of molds for the plastics industry, to list a few uses.

Helicopter propellers produced by the firm are an interesting example of laminated wood-compressed wood construction. The main spar or stem of the 20-foot blade, which is provided with ribs, is composed of compressed wood, while the blade surface consists of a shell of light laminated wood. The advantages of a propeller of this type were amply demonstrated during the war. In the event of being badly hit by shellfire the blades, having greater flexibility than those of steel, shear off rather than becoming twisted and putting the aircraft out of action, which is liable to happen under such circumstances.

Another phase of the organization's activities is that of bonding compressed wood and metal for parts that have to be both strong and flexible. This is done by combining wood and metal laminations, the latter being perforated with holes that are staggered in relation to one another. By this method the adhesive resin flows unimpeded through the wood and openings in the metal, insuring a firm bond. This construction was used to good effect in attaching the hub to the blades of the helicopter propeller, the connecting members consisting of parallel metal plates laminated into each blade.

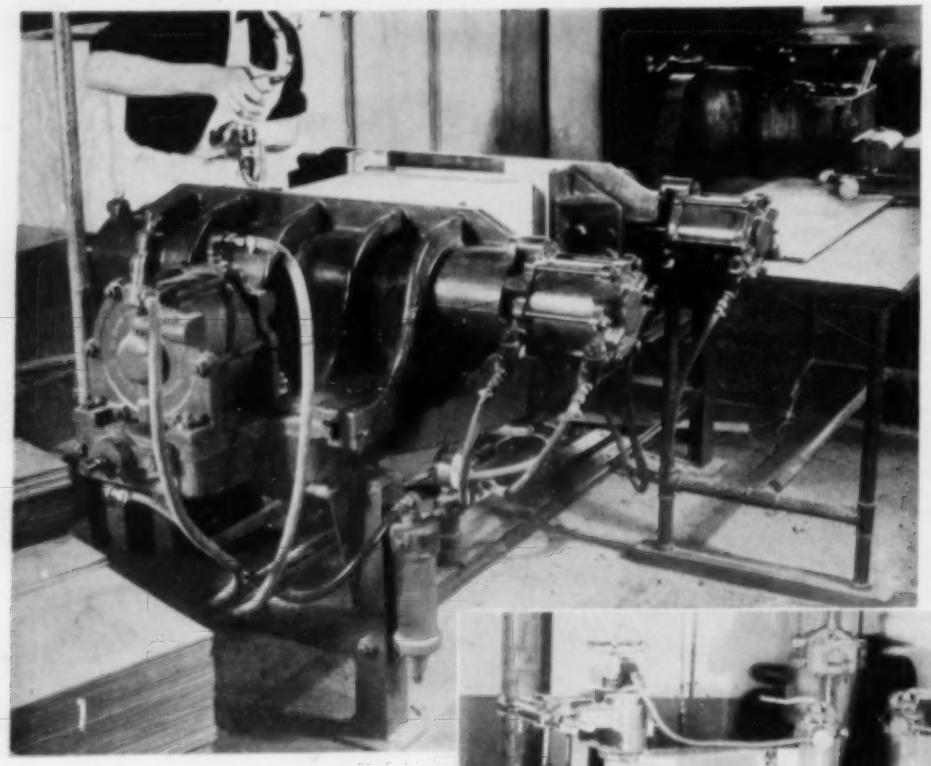

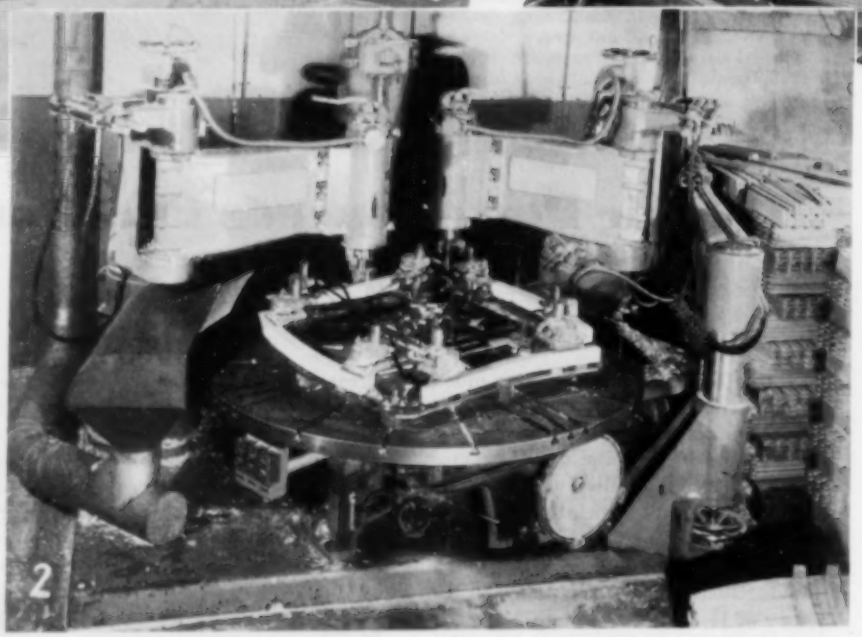

VARIED USES OF AIR POWER

1– The three air cylinders on this machine move clamps in two horizontal directions for gluing dovetailed drawer joints. The side frames can be adjusted to accommodate different sizes. 2– An automatic shaper that gives varying contours to flat pieces of wood mounted above templates on a rotary table. The cutters are kept in contact with the work by pneumatic pressure, and the wood, in turn, is held in place by eight air clamps. 3– An air-operated screw driver speeds the assembly of furniture. 4– This air hoist traveling on a monorail unloads coal from trucks and elevates it to powerhouse bunkers. 5– A small autoclave that was used during World War II to make boat-shaped plywood jettison gasoline tanks for Mosquito aircraft. On the table is the former over which the wood was shaped by air pressure. The hood of the pressure chamber is shown in raised position. Air was supplied by the compressor at the right.

Compressed wood, as well as light plywood, is laminated by Morris in making household ornaments and utensils. Highly decorative edge patterns are obtained by intermingling layers of mahogany, sycamore, French walnut, etc., while fruit bowls and similar articles can be given beautiful surface designs by molding them of interlaced strips of different woods. In the case of the lighter laminated components, 1/80- and 1/64-inch plies are molded to form a solid mass of the desired shape and thickness by subjecting them to hydraulic pressure of 1500 psi. The presses are steam or electrically heated under automatic control, which insures even distribution and proper curing of the bonding adhesive. In manufacturing compressed wood, which involves remaking the structure of Nature's product, pressures of 3500 psi. are applied for periods of from four to six hours.

All-wood laminations must be distinguished from wood veneers with a plastic core, a lower-cost material that has been turned out by some concerns as a substitute. When increased supplies of lumber again become available, products made throughout of plywood are sure to grow in number and give this phase of the woodworking industry a far greater field than it has enjoyed in the past. By means of modern manufacturing methods, as practiced in the Glasgow factory, it is possible to produce quality furniture and other things of laminated construction for the millions in quantity. One of the projects now taking shape in its planning department is the molding of standard pieces of infinite variety and complexity to be carried in stock and used in the making of a wide range of standard-design articles.

Aside from effecting considerable savings in manufacturing time, the material that enters into molded objects does not have to undergo long seasoning such as is necessary in the case of lumber, because the treatment to which it is subjected insures dryness and uniformity of structure and makes it proof against warping. Laminated furniture withstands water and heat, does not come apart, as proved by tests of 72 hours' duration in boiling water.

In addition to the work outlined, the plant is equipped for the fabrication of solid-wood furniture of all kinds on a scale that is amazing. Take chairs, for example. By the methods used it is possible to supply continuously the components necessary for an output of 600-

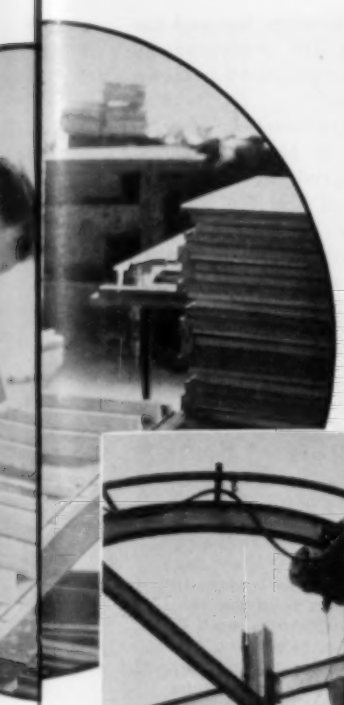

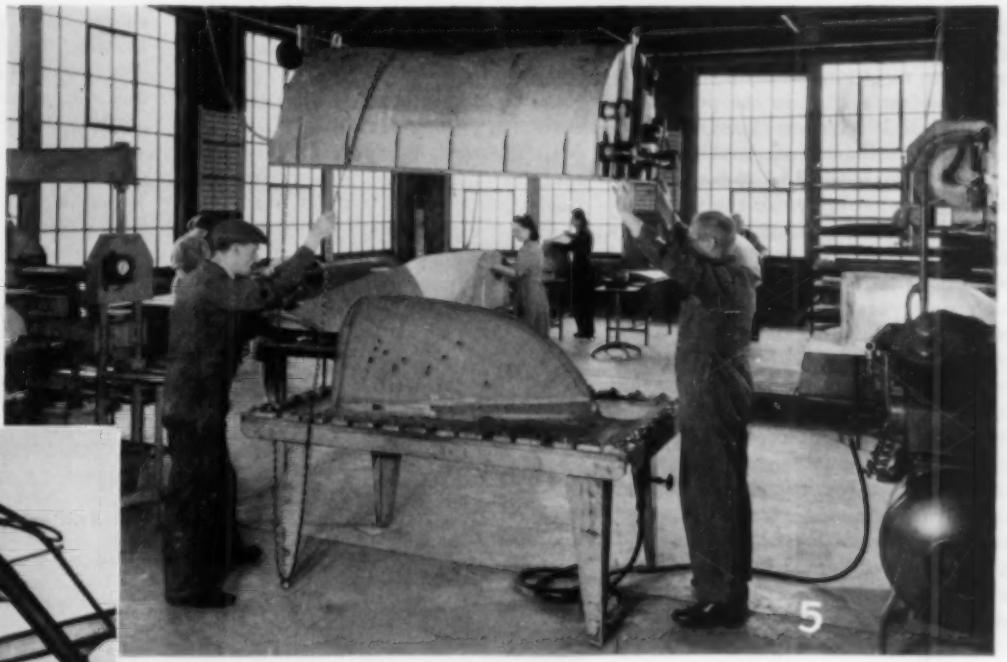

800 chairs a day. Moreover, the parts for three different models can be run through simultaneously.

Compressed air is the main motive power in the woodworking shops. It is ideal for the purpose because it is clean and safe and easily controlled by hand valves, an important feature where variations in pressure are required. It can be exhausted to the atmosphere without causing damage, eliminating the complicated return piping of hydraulic systems, as well as the fire hazard when oil is used.

The compressor plant is made up of two Ingersoll-Rand Type 30 machines and one Type 40 air-cooled unit, which serves as a standby. Each is mounted on a large horizontal receiver from which the air is piped throughout the factory, including the main engineering department where it serves to operate hoists and the control valves of the hydraulic presses. Elsewhere it is used to power rotary tools such as screw drivers, drills, sanders, polishers, clamping devices, and spray-painting equipment. Flexible, small-diameter hoses deliver it to the points of application at each of which a trap, interposed in the line, catches any water entrained in the air, which is supplied by the compressors at a maximum pressure of 100 psi.

Pneumatic clamps play a vital part in the manufacturing and assembling operations and consist either of individual air cylinders or groups of cylinders set at right angles to one another horizontally or vertically, or both, depending upon the work being done. These usually take air at from 60 to 80 psi., but for some services as little as 10 psi. is adequate. Each unit is controlled by a foot valve, the operator admitting air to the cylinder or cylinders and, in turn, releasing the pressure. The piston stroke is adjustable.

In the cabinet shop, as elsewhere, there are a variety of clamping devices, and the pressures applied are relied upon not only to glue assembled components together but also to squeeze out superfluous glue and leave the thin film that insures the best joint. This calls for nice control, which offers no difficulty with air power.

The carcass clamping machine, for instance, can accommodate large frames of dressing tables, wardrobes, etc., and is adjustable. Turning a hand wheel operates a horizontal screw stem which moves one side of an end cage laterally thus changing its size, while stops in the sides permit varying its height. The cage can be rotated by hand to make the work accessible, and a single horizontal air cylinder exerts whatever pressure may be desired to its movable side to hold the carcass for gluing and for putting in screws with a portable pneumatic tool.

In assembling beds, one of the clamping units used has a table with slots in the edges which permit varying the number and positions of a group of pneumatic cylinders in accordance with requirements. Even in the finishing department there is a large clamping machine with eight cylinders, six ranged along one side and one at each end, to grip long pieces during sanding operations.

Chair manufacture, as has already been intimated, is carried out by production-line methods, the separate components being delivered by conveyor belts to stations for sub- and final assembly. The parts come from the machine shop ready to be put together, except for two dowel holes which have to be drilled in each back leg for the side rail in which the pins are inserted. This is done by placing groups of rails in a metal frame and pushing the dowel pins in by a small pneumatic cylinder. Where the construction calls for it, the rails are reversed and the performance is repeated.

Assembly varies somewhat with the type of chair, but each is generally built of three units, as follows: Back rails, slats, and back legs; front rail and front legs; and the stretcher (H-shaped leg stiffeners) plus side rails. The top and bottom back rails are fastened by tenon and mortise joints to three vertical slats. The components, to which glue has been applied, are placed in a fixed frame in which they are held firmly while pressure is exerted against one rail by a suitably shaped head attached to the piston of a pneumatic cylinder. This assembly and the back legs are similarly joined by the aid of a frame that has a movable side against which pressure is brought to bear by an air cylinder mounted at right angles to the legs, the lower ends of which rest against a stop. The succeeding operations, preparatory to final assembly, are carried out in much the same

manner with specially designed frames and pneumatic clamping devices arranged to meet requirements.

At the last station in the production line, the three subassemblies are put together. This involves making eight joints, four on each side, to connect the side rails and stretcher to the front and back. The side rails are fastened by dowels and the stretcher by tenon and mortise. Four triangular blocks, one in each corner, are fitted in the seat to prevent distortion while the chair is under pressure. The frame for this work is large and is composed of two sections between which the chair is placed upright. The part adjacent to the chair front is of the same height as the latter and moves with the piston of a horizontally disposed air cylinder. The back of the frame is stationary but can be adjusted by two square-threaded screws with chains and sprockets for hand operation.

In the upholstery department there is a press for stuffing chair seats. This, too, is actuated by a pneumatic cylinder, as one of our pictures shows. The piston has a 5-inch stroke and carries a flat plate that compresses the stuffing in the seat cover, forcing it against a rubber platen that permits it to expand and fill the seat, which is confined within a metal mold.

In the machine shop compressed air performs numerous services. Installed there are single and double automatic shapers that are designed to give flat pieces of wood varying contours. The cutters of these units are kept in contact with the work by pneumatic pressure, and the work, in turn, is held in place by pneumatic clamps. It is mounted above guiding templates on a rotary table. A multiple drilling machine in the same shop is provided with four vertical clamping cylinders; and in the case of a veneer saw, the front bar that holds plywood in position while it is being edge-sawed is under pressure from a like source. The back pressure bar and the canting table also are pneumatically controlled. Sawdust produced is blown away by an air gun.

The autoclave or pressure chamber, in which large sheets of plywood are individually given desired shapes, is an interesting example of the use of compressed air. It consists of a former and of a hood which is raised and lowered by an air hoist and has a sealing ring around the bottom to make the chamber airtight. The equipment is served by two compressors driven by an electric motor. The air supplied is stored at approxi-

PUTTING A CHAIR TOGETHER

1– Exploded view of a curved-back chair, showing 22 joints that are brought together for gluing in specially designed pneumatic clamping machines. 2– First of the subassemblies, in which top and bottom rails and slats are being squeezed together and glued to form a part of the back. 3– Here the back legs are being added, with air cylinders at the left and top exerting pressure from two directions. The machine is operated by the pedal on the floor. 4– Final assembly is made in the clamping unit in the background. A completed chair chassis is on the conveyor in the foreground. 5– Air pressure from an overhead cylinder is used to stuff chair seats. A flat plate attached to the free end of the cylinder piston forces the cushion against a rubber platen, causing the stuffing inside of it to expand fully and to fill the seat confined within a metal mold. A similar but smaller machine is used to give plywood for movie-theater chairs curved contours.

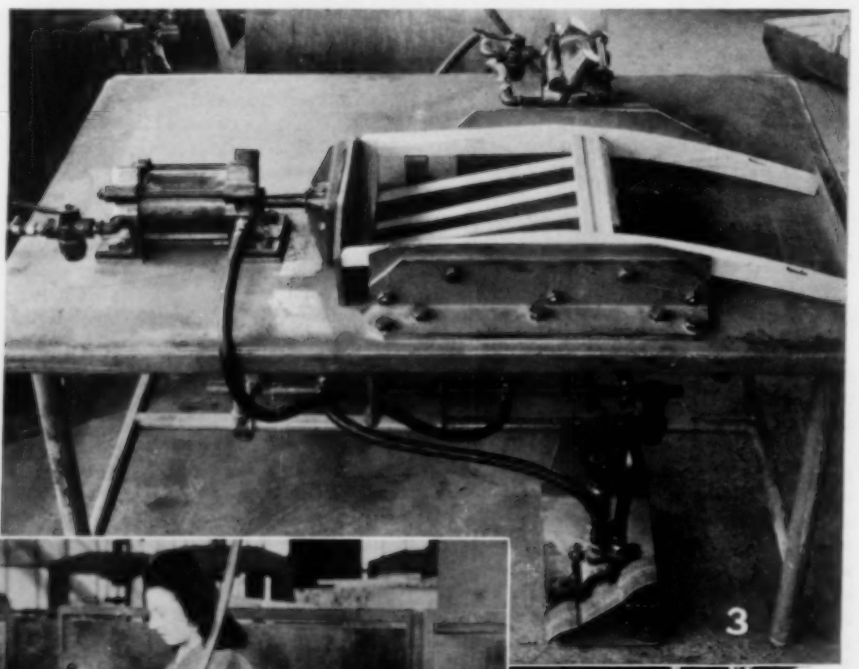

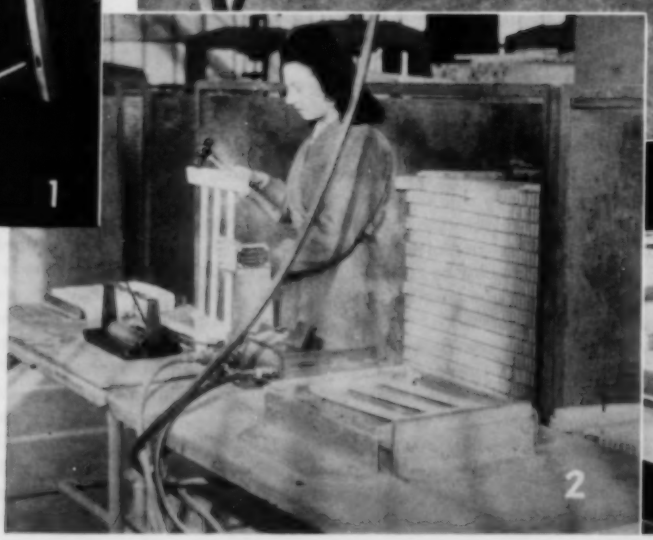

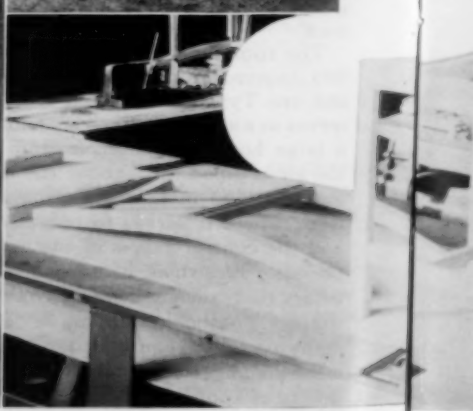

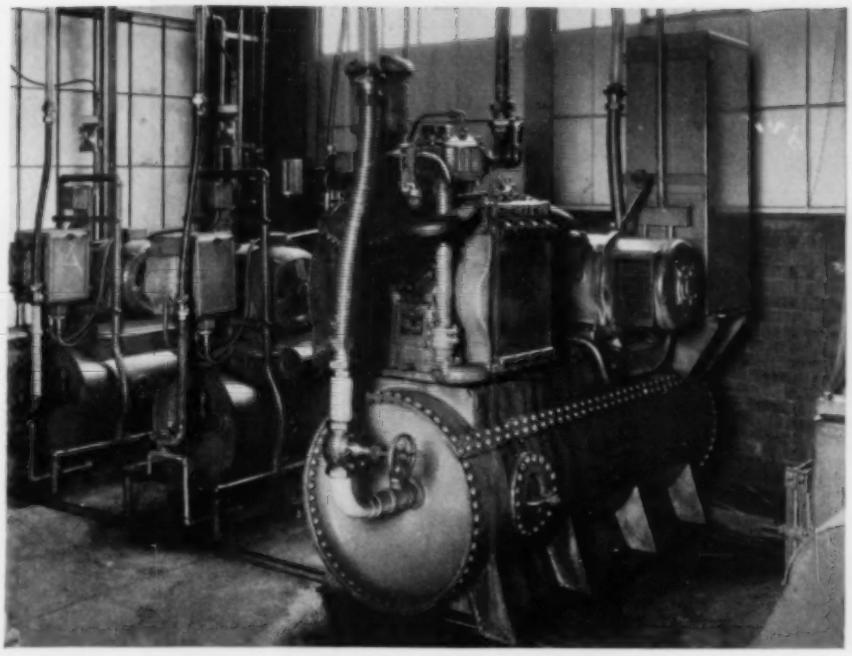

FACTORY AIR PLANT

Three Ingersoll-Rand motor-driven units—a 25-hp. Type 40 in the foreground and two 15-hp. Type 30 models—supply compressed air at 100 psi. pressure for general use in the plant.

mately 140 psi. in a receiver that is attached to the autoclave and is admitted directly into a rubber diaphragm that presses the sheet against the former. To bring the wood in close contact with the latter, the space between the two is evacuated. When the pressure drops, the compressors automatically cut in to replenish the receiver. A smaller autoclave, generally similar in design, was utilized during the war to shape the jettison gasoline tanks for aircraft mentioned at the beginning of this article.

Plywood sheets are also pressed into angle shapes by means of a bending machine. The pistons of four vertical pneumatic cylinders, about 1 ½ feet in diameter, are connected to the unit's main bending beam and push the latter upward against a roller held in position by screw clamps. The plywood to be bent is kept in contact with the roller by a wooden clamp that is served by three vertical 6-inch cylinders interposed between the large units.

This article would not be complete without some mention of Neil Morris and of the bedroom suite that he designed and built for the people of Glasgow as a wedding gift for Princess Elizabeth and the Duke of Edinburgh. It is constructed of the finest white Sycamore in Regency style and has been installed in Clarence House, the royal couple's London residence. There are fourteen pieces of furniture, which are about 2 inches higher than conventional pieces because the duke is 6 feet 2 inches tall.

Neil Morris at the age of 31 is not only a foremost furniture designer but also the country's youngest head of a large furniture factory, which was founded by his father in 1902. This is partly explained by his years of intensive application in numerous fields pertaining to woodworking. After being graduated from school he was apprenticed to a mechanical engineer, going through the engineering and pattern shops and drawing office. During that training period he also studied heating and ventilating, wood cutting, and art at night. When nineteen years old he went to Germany to work in plywood mills, then to France and Switzerland to familiarize himself with decorative veneers and plywood technique. Not content, he came to the New World to see how things are done here. He toiled for a while as a lumberjack in Canada and then worked in leading shipyards and furniture factories in the United States. With that background, it is not hard to understand why the plant he heads in Glasgow has a reputation for fine craftsmanship.

PHOTO BY J. B. GIBSON

PHOTO BY R. A. MIDTHUN

Shasta Dam Cableway Now a Memory

SHASTA DAM, key structure in the U. S. Bureau of Reclamation's Central Valley Project in California, was completed in 1945, but the work of dismantling the aerial cableway system that played a vital part in its construction was finished only recently. This would normally have been a part of the contractor's job, but circumstances decreed otherwise. The head tower stood in the reservoir area, and it was originally planned to have it out of the way before the impounded water reached its base. However, the urgent need for power during the war period caused a speed-up in operations, and the basin was filled sufficiently to permit generating 150,000 kw. of energy a full five months before concrete pouring was completed.

In the final settlement of the contract, the Government took over the tower, but chose to postpone its dismantling until labor was more plentiful. The job was eventually done by contract, the steelwork being removed to a point below the reservoir's lowest operating level. Thus the tower rising out of the water—a well-known landmark during the past several years—disappeared from view in April of this year.

The cableway system didn't get deserved publicity while it was in service because of wartime restrictions. It was the most elaborate carrier of its type ever devised and, incidentally, the final effort of the late Frank T. Crowe, one-time Bureau of Reclamation engineer who, later, attained international renown as general superintendent for the contractors during the building of both the Hoover and Shasta dams. Mr. Crowe is generally credited with having originated the idea of using aerial cableways in dam construction.

The Shasta Dam system was considered Crowe's crowning achievement, and from its 460-foot-high, 4000-ton head tower track cables, 3 inches thick and weighing 22 pounds per linear foot, radiated across the canyon of the Sacramento River to seven individual tail towers each of which traveled on a double set of railroad tracks. By shifting the towers as desired, it was possible to deliver concrete and other materials to every part of the dam and powerhouse areas. A network of lines for moving the carriages on the track cables, slack carriers to prevent the lines from fouling, and other lines to raise and lower concrete buckets brought the length of cable to 25 miles.

The head tower had four structural-steel legs, each 40 inches square, that were laced together with various cross and diagonal members. These corner legs extended to bedrock as much as 102 feet below ground and enclosed almost an acre at the surface. The excavations were backfilled with concrete, and the top of the tower was capable of withstanding a pull of 1000 tons. The motors and hoists for the seven cableways occupied a room 95 feet square and 130 feet high at the 250-foot level. From the drums the cables ran upward and over sheaves at a point 200 feet below the top of the structure.

Seven operators—one for each cable-

PHOTO BY P. E. NORINE

1 CABLEWAY IN OPERATION. The 460-foot-high head tower as seen from underneath the trestle for tail tower No. 6. Carriages are visible on five of the seven lines. Picture was taken on September 27, 1940.

2 DISMANTLING HEAD TOWER. Almost all the sheathing that enclosed the upper part has been removed. Comparison with picture No. 1 will give an idea as to how much of the base was inundated by the reservoir. The elevator that transported men and materials up and down the tower is on the right side of the structure.

3 REEL OF TRACK CABLE. On May 8, 1940, three-inch locked-coil cable for cableway No. 1 was strung from the left abutment of the dam to the head tower. More than half a mile of the heavy (22 pounds per linear foot) wire was required.

4 ERECTING HEAD TOWER. View taken December, 1939, from right-abutment waste dump. One tail tower on the opposite abutment may be seen just right of the head-tower base.

5 NERVE CENTER OF SKYWAY. Top of the head tower as viewed from the dam crest, July 10, 1943, showing the multiplicity of wires converging upon it from the seven aerial tramways. The battery of floodlights on the side of the tower helped to illuminate the construction area for night work.

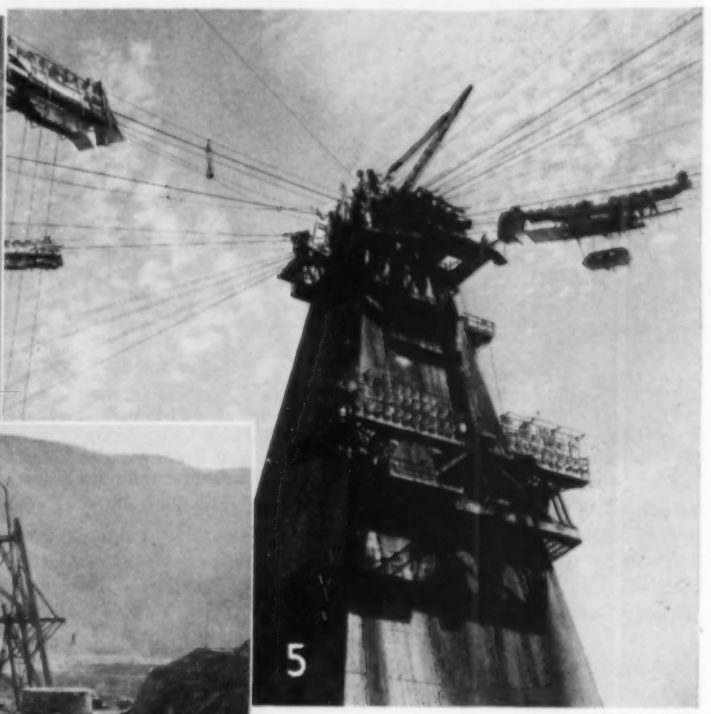

PHOTO BY D. A. HOVEY

PHOTO BY B. D. GLAHA

way—were stationed in booths 18 feet above the hoist-room floor and along the face of the tower where they could look out at their respective tail towers. Aside from them, only two or three oilers were in evidence when the system was functioning. The crews traveled to and from their lofty working perches via an elevator that ran on rails on the outside of the structure.

In addition to the operators, each cableway was manned by a signalman, stationed at or near the point of delivery, and by a hook tender. The latter attached and removed cable slings from loads other than concrete and rode the high line with his cargo. His services were not required when concrete was transported, as the buckets were dumped by the operator in the head tower. The signalman directed all placing, communicating by means of telephone and bell with his towerman. The pouring point was often out of sight of the latter, but he awaited instruction in any event. Buckets were loaded near the base of the tower and within his sight, and he landed them there without direction from an external source.

The buckets, 6 feet square and 8 feet high, each carried 16 tons of concrete and, all told, deposited 6½ million tons in this second-largest man-made structure. From July, 1940, until December, 1944, the head tower was the nerve center of the huge construction project. On August 9, 1941, the cableways placed 11,790 cubic yards of concrete in 24 hours, setting the existing record for this type of work.

Acknowledgment is made to the U. S. Bureau of Reclamation and its publication, *Reclamation Era*, as well as to Robert Midthun, chief guide at Shasta Dam, for the data and photographs.

NEW COMPRESSOR STATION

The station was planned for pleasing appearance and low maintenance costs. Both the main building and the small structure at the right, which houses the regulating equipment, have rigid trussless steel frames and Transite sides and roofs that require no painting. Subsoil conditions necessitated driving more than 50 concrete piles to an average depth of 43 feet to support the buildings. In the case of the old plant, piping was buried and consequently subjected to the corrosive action of salt water. Here it is all above ground on a concrete mat and protected with a red-lead primer and two coats of aluminum paint. Valves and connections are accessible for maintenance and repair.

New Compressor Plant for Long Beach, California, Gas System

THE city of Long Beach, Calif., has interests in more than 500 oil wells in the Wilmington Field, which is partly inside and partly adjacent to its southwesterly limits. The casing-head gas produced with the oil is stripped of its liquid hydrocarbons in three natural-gasoline absorption plants and is then distributed throughout the city for domestic and industrial use.

Gas consumption varies widely from season to season and also from hour to hour daily, and means had to be provided to meet these fluctuating service conditions. The volume and pressure of the gas coming from the processing plants remain fairly constant throughout each day, whereas customer demand is never uniform. Consequently, during periods of low consumption there is an excess of gas coming from the wells, and this is stored in holders as a reserve to be drawn upon when the rate of consumption exceeds that of the supply from the wells.

The gas leaves the absorption plants at 30 psi. pressure, which is also the maximum transmission pressure in the city distribution mains. A small percentage of the volume stored is held at this pressure, but most of it is reduced to from 8 to 14 inches of water pressure and held in low-pressure holders. When the latter is withdrawn, it must therefore be compressed to bring it up to the 30 psi. maintained in the distribution lines and must be handled at whatever rate necessary to meet the variable customer demand. With low-pressure tanks having a maximum capacity of 17,500,000 cubic feet and four high-pressure tanks containing 2,000,000 cubic feet, the Gas Department is well equipped to give first-class service at all seasons and at all hours of the day.

The territory is served by 520 miles of distribution mains and is divided into 48 districts. At a strategic location in each district an automatically controlled regulator station reduces the transmission-line pressure to 6 psi. These stations control the flow of gas to customer service lines, maintaining adequate supplies regardless of fluctuating demands that tend either to increase or decrease the line pressure from time to time.

Two of the low-pressure holders are at Compressor Station No. 1. As the latter's gas-compression equipment had become obsolete, it was decided to install a new compressor plant and controls. As a result, the recently completed station bears little resemblance either in appearance or mode of operation to its predecessor, a steam plant built prior to 1920 and containing some outmoded gas engine-driven compressors.

The new station is designed to handle nine million cubic feet of gas a day, the

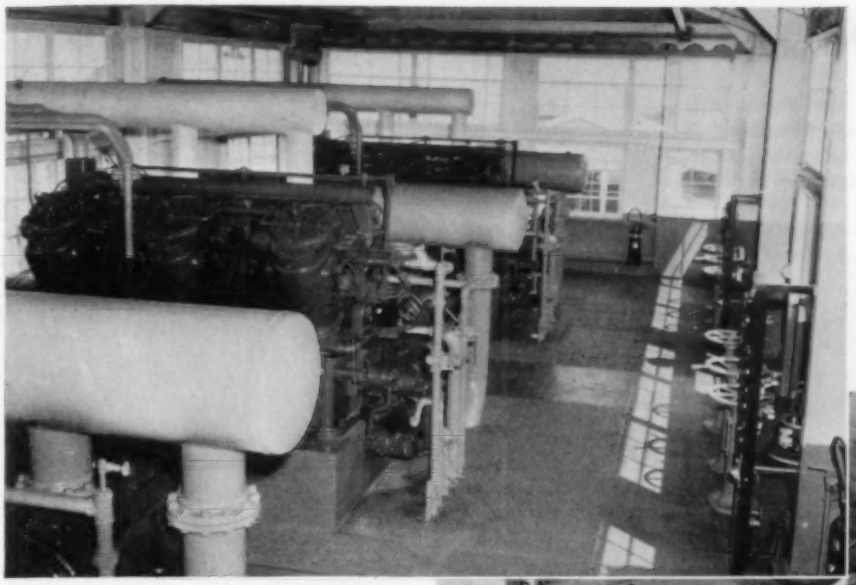

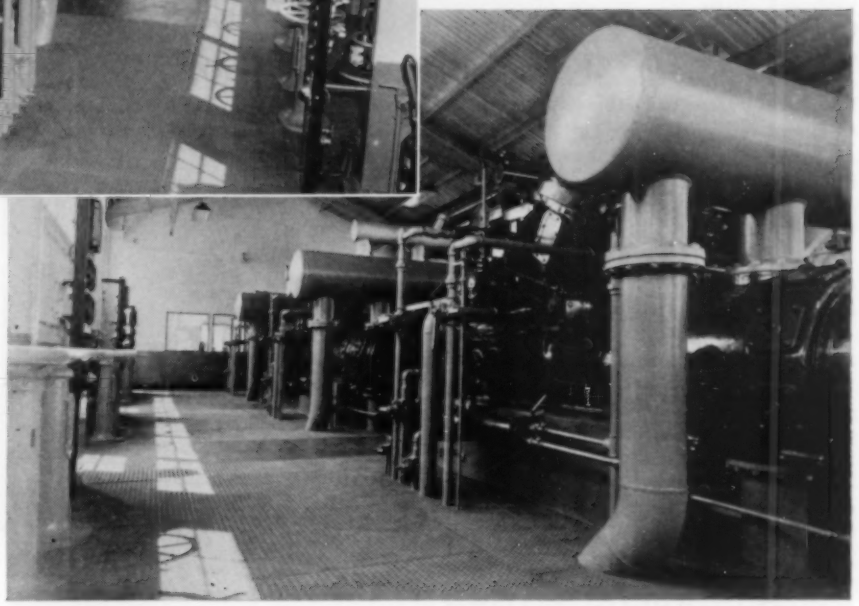

STATION INTERIOR

Two views of the room that contains three Ingersoll-Rand Type XVG, 225-hp., gas engine-driven compressors. These machines take gas from low-pressure holders at from 8 to 14 inches psi. of water pressure and send it out through the city distribution mains at approximately 30 psi. Each of the three units is actually an independent compressing plant with its own auxiliary equipment, and the number of machines in service varies from time to time in accordance with the fluctuating demand for gas.

intake pressure being equal to that of the gas holder and the discharge pressure not exceeding 30 psi., gauge. Factors entering into the design were the greatly fluctuating demand and the need of maintaining definite pressures on certain feeder mains regardless of the volume of gas passing through them. To meet these requirements and to do so with a minimum of equipment, the load was divided among three gas-compressor units and an unloading system was incorporated in order to take care of variations in demand.

The compressors selected for the job were Ingersoll-Rand 6XVG-1, 4-cycle, gas engine-driven units. Each of these has six 11x12-inch engine cylinders that operate on natural gas and three 19½x 12-inch cylinders for compressing the gas, the power rating being 225 hp. at 350 rpm. The compressor cylinders are built with a large clearance between the cylinder head and the piston at the end of its stroke so that they will unload themselves when the demand for gas falls off and the compression ratio increases. This simple expedient was chosen in preference to clearance pockets and/or valve lifters that function automatically with variations in discharge pressure. Engine speed can be reduced to 50 percent of normal full speed by an automatic control actuated by the discharge pressure, thus making it possible to maintain a predetermined pressure on a distribution line irrespective of fluctuations in requirements.

Each of the compressor units has its own auxiliary equipment such as pumps for circulating jacket water, oil, and for gas cooling and is actually a separate plant, independent of the others, capable of handling continuously from 1,500,000 to 4,500,000 cubic feet of gas at a discharge pressure ranging from 15 to 30 psi., gauge. Because of the availability of large quantities of water in the gas-holder tanks, it was not necessary to erect a cooling tower. Instead, water is drawn from them as needed and circulated through the cylinder jackets of the units.

Another respect in which the new plant differs from the old is that the controls are installed in a separate building in order to minimize the noise incident to pressure reduction. The station's gas-transmission problem is somewhat complicated. During a part of the day the gas holders are filled and gas is simultaneously transferred from one section of the distribution system to another. At other times, gas is transferred while the compressor units are pumping gas from the holders into the transmission feeder lines. Much equipment is needed to regulate these movements, and all of it is remote-controlled from the office in the main plant.

In the old station, the yard piping was buried and often immersed in salt water. To prevent corrosion, all piping was dug up, placed above ground, and covered with a red-lead primer and two coats of aluminum paint. An added advantage of this arrangement is that all valves and connections are in sight, thus not only facilitating operations but making them easily accessible for maintenance and repair.

A further improvement is the standby generating unit that has been provided to insure continued service in case of failure of the plant's electric-power supply. It consists of an Electric Machinery Company 50-kw., 220-volt generator driven by a Waukesha 75-hp. gas engine, and has sufficient capacity to operate the pumps and to carry the lighting load in times of emergency.

The cost of the entire station was approximately $275,000. Layout and installation were under the supervision of Samuel L. Spencer, superintendent of production for the company.

Quarrying Hard Trap Rock

LOCATED near Quakertown, Pa., the Rock Hill Quarry of the General Crushed Stone Company is characterized by one of the hardest types of rock in the country. An igneous formation designated as high-grade trap rock, it is extremely dense and compact and presents special quarrying problems. These are being met by a combination of improved drilling and blasting practices.

The quarry supplies crushed stone for commercial use. It was formerly worked with well drills, but because of the nature of the rock progress was slow and only 9 inches an hour could be obtained. As demand for its products increased, it became apparent that a speedier method of operation would have to be adopted. As a result, the present procedure was introduced and has been in use for about fifteen years. Known as coyote blasting, it involves the driving of small-sized tunnels into the base of the working face and from them advancing crosscuts that are loaded with explosives and fired.

One recent blast broke up approximately 200,000 tons of rock. The entry tunnel was 3x4 feet in cross section and 82 feet long. At a point 42 feet in from the portal, a crosscut was driven 110 feet to the right and 9 feet to the left. Where the tunnel ended, a second crosscut extended 100 feet to the right and 26 feet to the left. A row of four holes, each 9 inches in diameter and 85 feet deep, was then put down along the top of the working face to shatter the upper part of the formation.

Around 61,000 pounds of explosives was used for the blast. It was divided into a number of charges that were spaced along the crosscuts and in the drilled holes. Hercules Gelamite and Hercomite were utilized—the Gelamite in cartridge form was loaded in the drill holes and the Hercomite in bags in the crosscuts. Minus ⅛-inch stone screenings from the quarry's crushing plant served as stemming in the crosscuts, filling the spaces between the charges. This material was formerly put in loose, creating dust and ventilation problems, but is now packed in paper bags. This change has effected a saving in loading time alone of approximately 30 percent.

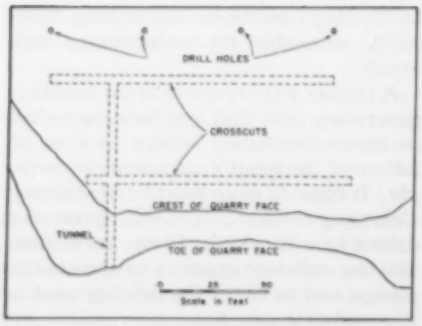

BLASTING DIAGRAM

Plan drawing showing extent and location of the underground powder galleries and their relation to the vertical drill holes farther back from the face.

BLAST AND RESULT

A coyote-hole blast brings down about 200,000 tons of rock, including large boulders that require secondary blasting. The workman shown at the left is drilling shallow holes for this purpose with a J-40 Jackhamer and Carset bits.

Work was further facilitated by installing a 2-way roller-type conveyor track in the tunnel for the transportation of both explosives and stemming material. Operations were begun at the far ends of the crosscuts and progressed toward the entry tunnel. When loading there was completed, the tunnel itself was filled with stemming, the conveyor being removed section by section as the crew approached the tunnel portal.

Jackhamers equipped with Carset bits were used to drive the tunnels and crosscuts and also served to drill holes in large pieces of broken rock for secondary blasting. The Carset bit is especially well adapted for work in hard rock because its tungsten-carbide inserts enable it to outdrill by far conventional types of steel bits.

About once every two years the company sets off a blast such as has been described. All possible precautions are taken to protect workmen from injury during firing, as well as from all other operations. That this program has paid dividends is shown by the bronze plaque that was presented to the Rock Hill Quarry for taking first place in the 1947 National Crushed Stone Association Safety Contest conducted by the U. S. Bureau of Mines. To win the award, employees at the quarry put in 93,869 man-hours without a lost-time accident.

The General Crushed Stone Company, with central offices in Easton, Pa., owns and operates sixteen crushed-stone and bituminous-concrete plants in New York, Pennsylvania, Massachusetts, and Delaware; two sand and gravel plants in New York; and two agricultural-limestone plants in New York. Otho M. Graves is president; O. E. Benson, vice-president and general manager; John Rice, Jr., vice-president; Redington Moore, secretary and treasurer; M. Bovee, general superintendent; and E. E. Dotter, assistant general superintendent. E. Z. Cole is superintendent of the Rock Hill plant. For the past several years the tunnel blasts have been under the technical direction of Milo Nice of the Hercules Powder Company.

QUARRYMASTER DRILL

At two of its quarries the company uses these self-contained, air-operated units for putting in deep blast holes.

New Mill Makes Stainless and Alloy-Steel Strip

TO MEET the fast-growing market for stainless, alloy, and high-carbon hot- and cold-rolled strip products, the Midland, Pa., Works of the Crucible Steel Company of America has put into operation a unique $18,000,000 plant that will specialize in stainless, the hardest of steels to process. The mill was designed to permit handling steel on an integrated flow plan from ingot to finished product under one roof covering an area of more than 535,000 square feet.

Throughout much of the plant the strip "carries itself" as it uncoils in a series of process steps and recoils at the other end with the aid of the latest developments in automatic controls and mechanical devices. The outstanding feature of the entire layout is a hot-rolling mill with 66-inch-wide working rolls and with its own auxiliary furnaces to keep steel hot during processing. The only one of its kind operating in the United States, it goes by the name of 4-high reversing hot-coiling mill. As it rolls, it coils the strip onto reels, or giant spools, enclosed in gas-fired furnaces on each side. Thus the steel is kept hot for a series of passes between the rolls, each pass reducing the thickness of the strip. Stainless and alloy steels could otherwise not be hot-rolled continuously by a single stand of rolls.

Because of the unique materials flow plan on which the plant was designed and built, it is possible to follow an ingot or slab through all the hot-rolling, annealing, and cleaning operations and, a short time later, see strip uncoil far down the line into one of four cold-rolling mills. A special tandem cold-rolling mill, consisting of three stands of rolls, first passes the unheated strip through successive stands for three reductions in one pass, and then it goes through the other mills—the entire equipment representing highly adaptable finishing facilities by which sheet and strip can be controlled to a fraction of a thousandth of an inch. Scores of auxiliary machines to slit, cut, square, weigh, measure, surface finish, and otherwise process the steel produce the countless combinations of grade, gauge, and finish demanded by industry.

The importance of the new Crucible Steel Company development is disclosed in the following summary of a few of the end products of the stainless, alloy-sheet, and strip steel. The plant serves the automobile, aircraft, railroad, and transportation industries by providing sheets and strip for working parts, bodies, trim, interiors, etc. Special steels are produced for the chemical, dairy, food, paper, fabric, and other industries, as is steel for tank cars and trucks, for process equipment such as vats and tanks, and for the thousands of applications where cleanness and resistance to heat and corrosion are vital factors. Sheet and strip from the new mill goes to the makers of many articles for the home, including cooking utensils, kitchen equipment, household trim and counters, television receivers, and appliances. Untold additional uses are foreseen as new things come into being through the joint efforts of manufacturers and the operations and product-development staffs of the special sheet and strip-steel center.

MIDLAND WORKS, CRUCIBLE STEEL COMPANY

In the foreground of the aerial view, above, is the new sheet and strip mill that is ¾ mile long. The hot-rolling line is shown below. The large machine in the foreground is a slab shear, with a scrap pit left of it. The next, large unit is a 66-inch-wide, 4-high reversing hot-rolling mill for stainless, alloy, and special-purpose steels. Beyond it, the strip produced on the hot-rolling line is coiled for further processing.

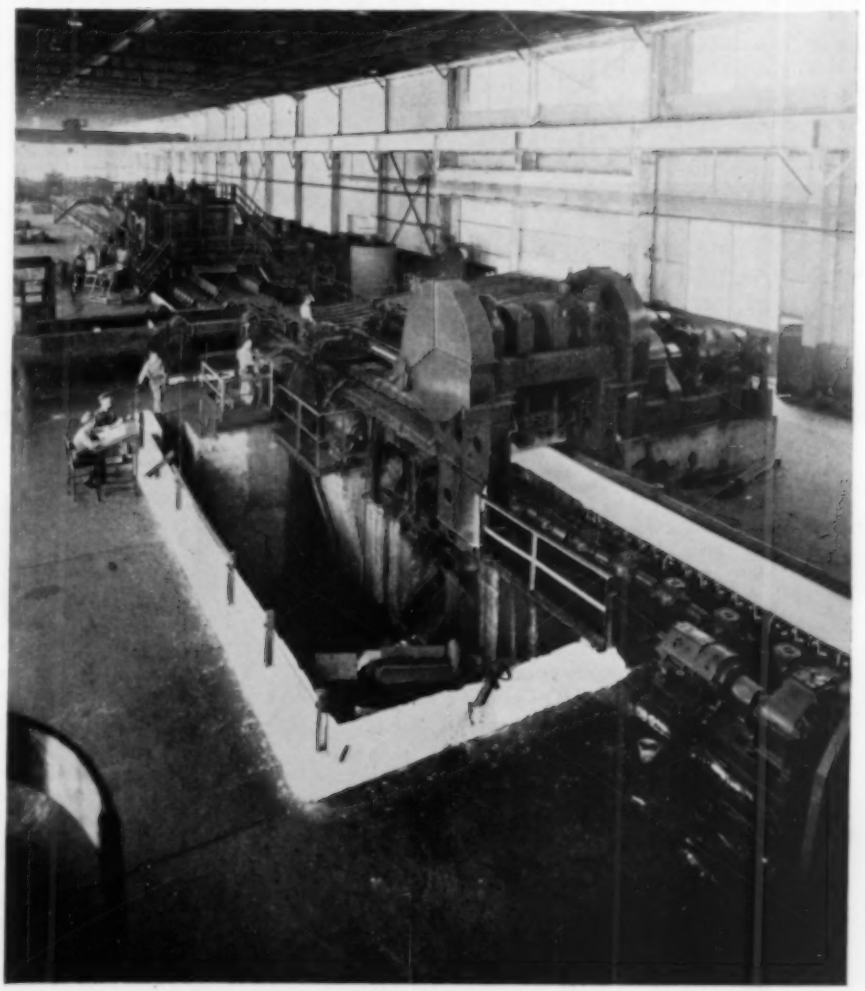

TIDBITS FROM CORN

SCHOOL children and cocktail addicts, who are always willing to try something new, head the list of customers subsidizing a "nibble" that is giving the peanut and pretzel a run for their money. "Cornnuts" is the name of the product that has fairly recently joined corn chips and other cereal tidbits, and it is made from whole grains of corn in the model plant of the Olin Manufacturing Company in Oakland, Calif., which is owned and operated by Albert F. Holloway. By his patented process the rich germ in each kernel is retained, and parching of the corn in deep fat is accomplished without appreciable penetration of the vegetable oil used, factors that give Cornnuts their distinctive texture and flavor.

A grade of white hominy corn, which grows largely in the southern states, is bought in carload lots and is processed at the rate of approximately one carload a month. In preparing hominy, the hulls are removed by soaking in a caustic solution that penetrates the kernels deeply and is then leached out by protracted immersion in changes of clear water. Considerable erosion of the kernels results, and the germ is separated along with the hull. Holloway's blanching method, on the other hand, builds up the moisture content of the grains before the caustic is introduced so that penetration is superficial and subsequent removal simplified.

In the Oakland plant, batches are treated in a rectangular, open tank with a perforated false bottom and with gas-fired flues. The temperature of the water covering the corn is gradually increased throughout a 2-hour period to 160°F., when the caustic solution is added and permitted to act for 1½ hours. Separation of the loosened hulls is effected by turbulence created by water jets and sudden draining of the tank by a 6-inch line, the water meanwhile being changed five times. The batch is then dipped into twin 96-cubic-foot vats and allowed to stand some eighteen hours for thorough distribution of the absorbed moisture.

The blanched corn is parched in steel-mesh baskets that are immersed in vegetable oil maintained at a temperature of 175° by gas-fired equipment. The oil, which is the expensive item in processing, is an excellent cooking agent, and its penetration into and adherence to the product are reduced to a minimum. This is as vital as the avoidance of sogginess in doughnuts and French fries.

Immediately upon removal from the parching tank, the baskets of corn are placed on a stainless-steel drainboard, and oil then clinging to the kernels is blown off by compressed air applied by a multijet gun. The air is furnished by an Ingersoll-Rand Type 30 compressor mounted on a horizontal receiver from which it is piped to the kitchen and also to the packing room, where it is indispensable in keeping intricate machinery functioning smoothly and in sanitary condition.

After the product has cooled it is salted and fed through a chute at the end of the cooling table into an automatic, electrically powered skip that discharges it into an elevated storage bin—this novel arrangement having been suggested by apparatus used for handling concrete aggregates. From the bin it flows by gravity through chutes to the packaging equipment. The most elaborate and labor-saving of these devices is a Stokeswrap Model-BS automatic machine with photoelectric control that uses twin webs of cellophane and delivers 60 one-ounce, heat-sealed bags per minute. These are packed 24 to a carton, which are wrapped and heat sealed in waxed paper by a Hayssen Model 5-11 unit. In addition, Cornnuts are put up in a vacuum-sealed 8-ounce can with a reclosable lid and, for bulk-vending machines and nut-store trade, in 5-pound wax-lined Kraft bags. All are distributed through brokers and jobbers so far in nine western states.

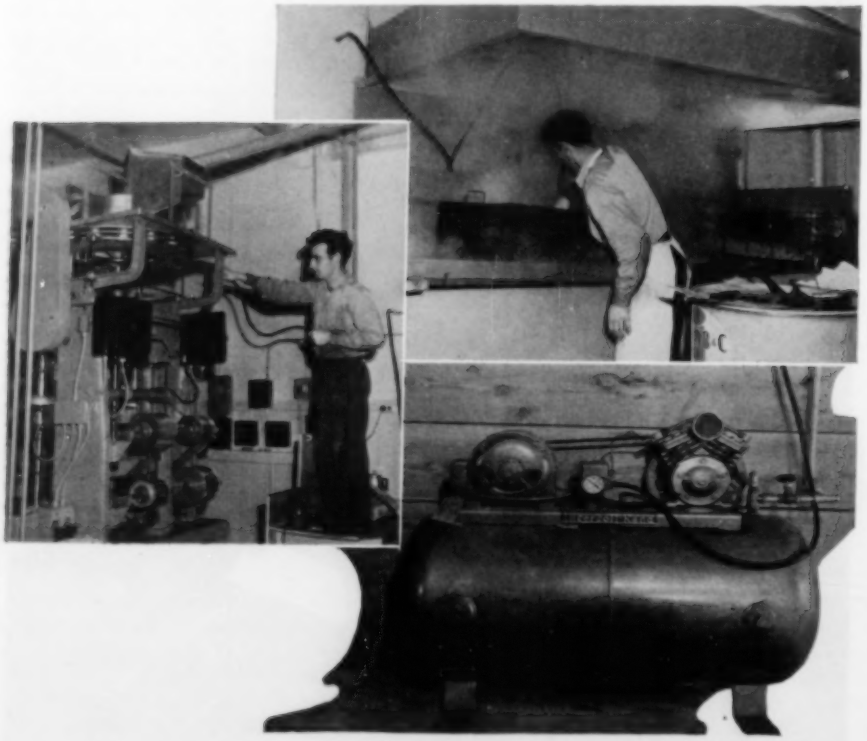

HELPFUL AIR BLASTS

Oil clinging to the kernels as they come from the parching vat is largely removed by stirring the batch with a multiple-jet compressed-air gun (top-right). A blow-gun is also regularly used to clean the intricate packaging machinery (left). The air supply comes from a compact, tank-mounted, motor-driven, air-cooled compressor.

Air Power Expedites Boring of Holes for Pole Anchors

FINISHING A HOLE

Above, the auger is about to be withdrawn by tackle after completing a hole. The sketch shows details of an anchor installation.

BY ADOPTING air-powered equipment for boring holes in which to lodge anchor plates for wood-pole guy lines, the Manitoba Power Commission has materially reduced the cost of extending electric service to rural areas in that Canadian province. The work involves putting in two holes that meet underground at a right angle, as shown in the accompanying sketch; installing a rod in one hole; attaching an anchor plate to it; putting the guy in place; and backfilling the holes. In clay or other solid soil, the plates used measure 6x15 inches, and those placed in wet or sandy locations are 8x24 inches in size.

By the previous hand method, three men traveling with their tools in a ½-ton truck bored an average of eight pairs of 9-inch-diameter holes per day. Last year the commission was faced with the task of putting in 15,000 anchors in a 6-month working season and determined to seek a faster method. After different types of post-hole augers had been investigated and rejected for one reason or another, it decided to devise equipment and, following a period of trial and error, chose an air-operated auger receiving power from a 105-cfm. compressor mounted on a tractor. On the rear of the tractor is a 9-foot boom from which is suspended a 74-pound air motor and a 7½-foot auger drill steel. Provision is made for raising and lowering them by means of a line run up the boom post from a hand-operated winch.

In average Manitoba soil the weight of the motor and auger is sufficient to feed the latter at an efficient rate, and it has been found that tree roots up to 1½ inches in diameter can be cut through and that stones 3 to 4 inches in size will not seriously interfere with boring. After a hole has been bottomed, the motor is stopped for an instant while the auger is lifted slightly and then restarted and withdrawn. This results in a clean hole with well-defined walls.

Two men operate the rig and are followed by three in a truck who do the installing. It takes only two minutes to drill a hole, but as the average requirement per farm is but three anchors and the farms are widely scattered considerable time is spent in traveling between jobs. The tractor can run twelve to fifteen miles an hour on highways and negotiate ditches and rough terrain to reach all working sites. Last summer the unit averaged 42 holes a day. It was computed that the new method saves $1.20 per anchor.

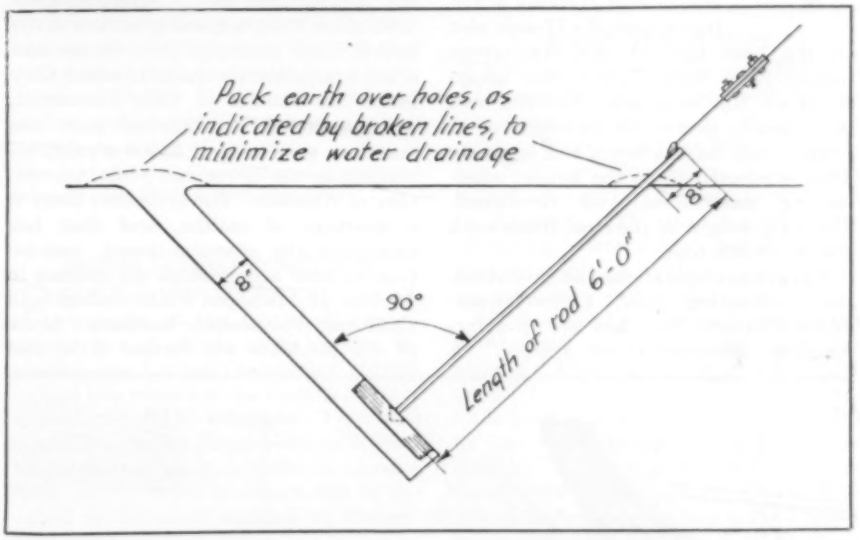

Rain Repellent for Airplane Windshields

SEVEN years of research are back of a rain repellent for aircraft windshields invented by Dr. D. F. Stedman, Division of Chemistry of the National Research Council of Canada. It is a wax preparation that is being manufactured and marketed as FC-10 Rain Repellent by a Canadian firm. It is said to prevent optical errors the extent of which varies considerably with the size of the drops, the amount of water, the air speed, and the angle of the windshield. Simulated flight tests have revealed that the average error is 5° in angle in the line of vision, which means that a mountain peak half a mile ahead of a plane flying through a downpour might appear to the pilot as much as 200 feet lower than it actually is.

Upon impact with a windshield coated with the preparation, the drops of water are broken down into tiny droplets which pass off into the air stream so rapidly that they are invisible. The windshield therefore appears to be dry and permits vision free from distortion or ripples. Objects 2 miles distant, that remained invisible under certain conditions when viewed through an untreated surface, were in plain view when the wax repellent was applied to the glass. It is said to be satisfactory at air speeds even in excess of 600 miles an hour, and in the heaviest rain. It does not shed ice, but does not interfere with normal de-icing either with heat or alcohol. Materials used are noncorrosive and do not damage paint finishes.

This and That

Power for "Inch" Line Compressors

One two-hundred-eightieth of all the electric power produced in the United States this year will be used in transmitting natural gas through the 1500-mile Big Inch and Little Inch pipe lines that extend from Texas to the Atlantic Seaboard. Most of the energy is required to run motors that operate more than 100 centrifugal-type compressors in fourteen of the 21 booster stations on the lines. Compressors in the remaining stations are driven by gas engines. The year's consumption of power will exceed one billion kilowatt-hours, according to W. T. Thagard of Texas Eastern Transmission Corporation which operates the lines.

★ ★ ★

Paging Building Bosses

Steelwork for the first of a group of buildings that will be the permanent home of the United Nations is rising on part of a 17-acre plot on the east side of mid-Manhattan Island, New York City. The initial structure, the Secretariat Building, will be unusually narrow for its height of 42 stories, and its steelwork will embody what is reputed to be the largest wind-bearing connections ever developed. The total weight of the steel framework will be 13,000 tons.

To expedite operations and save steps, the contracting firm, Fuller-Turner-Walsh-Slattery, Inc., has set up a far-reaching communications system. A microphone in the field construction office is connected through a telephone exchange with loud speakers located strategically about the site. Supervisors who are paged through this hook-up go to the nearest telephone to talk with the field office. It is planned to extend the system as the structure rises by placing a loud speaker and telephone on every fourth floor. Then keymen will never be more than two floors removed from contact with headquarters. The 50-watt amplifier used permits the paging system to be heard above the din of riveting hammers and other construction noises.

★ ★ ★

Smithy Is Now a Traveler

In this modern automotive age, horseshoeing or farriery is a declining but a far from disappearing art. Strangely enough the motor truck, one of the inventions that have cost today's horseshoers business, has become their ally. Approximately 1000 of the 8000 remaining farriers in the nation have mounted their forges and other equipment on trucks in which they make the rounds of their customers. Thus outfitted, a competent man can and does earn around $8000 a year, according to the Horse and Mule Association of America. Nevertheless, there is a shortage of smiths, and that has prompted the aforementioned association to offer scholarships for courses in farriery at Michigan State College and California Polytechnic Institute. Most of the students are former GI's, and more than 50 have been graduated.

Between 1910 and 1948, the horse-and-mule population of the country slumped from 24 million to less than nine million, while farm tractors rose from virtually none to three million. Of the equine total, only about two million wear shoes, the others do not need them because they work on soft ground. Those that are shod must be refitted every four to six weeks. Each job brings the farrier from $5 to $15, depending upon the type of shoes and whether they are put on a race, show, riding, or work animal. The new-style artisan, with his forge on wheels, can shoe from six to eight animals a day. *Automobile Facts*, from which we culled the foregoing information, sums up the trend with this bit of verse:

Under the spreading Chestnut tree
The village smithy's not.
He found there's no percentage in
Just standing in one spot.

★ ★ ★

Janitor Cited for Service

Further proof that this country recognizes merit in all ranks is found in the announcement that Thomas P. O'Neill, 68-year-old janitor in the Boulder City, Nev., offices of the U. S. Bureau of Reclamation, has been cited to receive an honor award. His service as camp cook when field parties were surveying for Hoover Dam is especially remembered. Handicapped by the desert heat, sandstorms, lack of refrigeration, and scarcity of fresh food, he still managed to keep the engineers healthy and fairly contented. Butter and fresh meat, when they were to be had, were kept at the bottom of a moistened hole. At night, to thwart coyotes and other prowlers, meat was wrapped in oiled paper and suspended from trees. O'Neill ranged the prairie with his gun to add game and wild fowl to the larder, and when camp was pitched near the Colorado River he saw to it that there was fish on the table.

There being no doctor around, O'Neill ministered to the party's ailments from sunburn to snake bite. He also patched clothes and repaired shoes. His tenor voice, trained at St. John's Academy, Brooklyn, N. Y., in his boyhood, contributed to the singfests to which the men turned for relaxation. Among O'Neill's table guests were Herbert Hoover, champion pugilist Jim Jeffries, various congressmen and senators, and innumerable prominent engineers and scientists. Although labor turnover in the camp was heavy, O'Neill stuck it out and there was little sickness in the camp. He intends to continue serving the bureau as janitor until he reaches the mandatory retirement age of seventy.

"Hello, Acme Air Conditioning!"

EDITORIALS

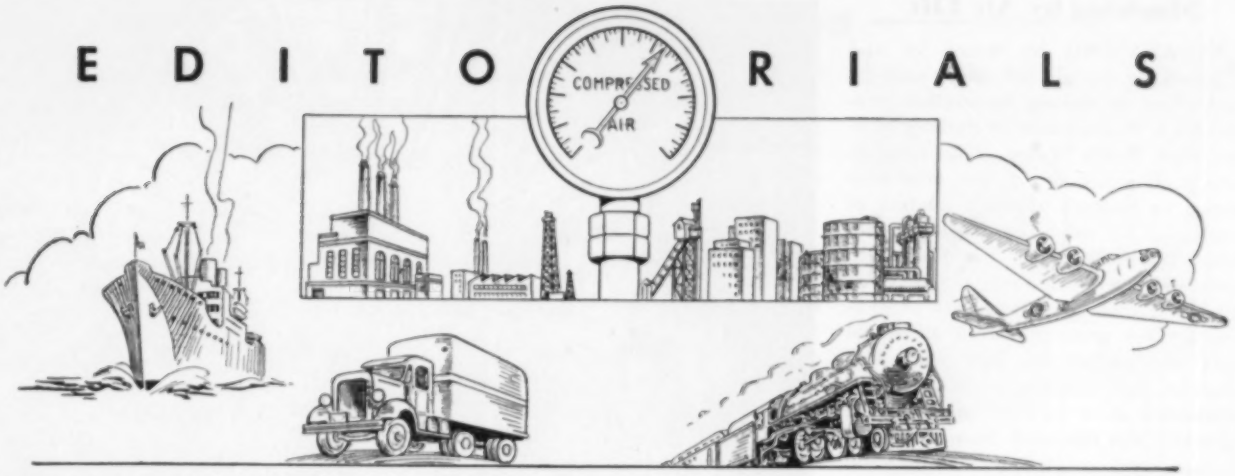

DEVELOPMENT OF ALASKA

THE first comprehensive movement toward the colonization and economic development of Alaska since it became an American possession 82 years ago has been launched by the Department of the Interior. Acting under congressional authority, the Department's Bureau of Reclamation has prepared a report recommending utilization of the territory's water resources for generating power, bringing land under cultivation, and providing recreational facilities. After review by various Federal agencies, the report will be submitted to the Congress as a basis for possible legislation.

The potential hydroelectric capacity of Alaska's rivers is eight million kilowatts, the report states. That is more than half the waterpower output of the United States and three times the installed capacity of the Tennessee Valley Authority. More than a dozen areas have been designated as containing possible power-plant sites.

It is the belief that the settlement and the industrial upbuilding of Alaska would be accelerated by making electricity available. Only 100,000 persons reside there now, whereas Secretary J. A. Krug of the Interior Department estimates that its natural resources could support five million on a high standard of living.

Alaska has an area of 586,000 square miles, or about one-fifth that of the United States. Leaving out the treeless northern section, 386,000 square miles are considered habitable. It is advocated that steps be taken to bring 135,000 acres of new land into agricultural production as soon as possible and to develop water supplies for municipal and industrial use.

Military authorities are in accord with the recommendations, because strengthening of the internal economy of Alaska would reduce the expenditures necessary for adequate defense. Thus far, the construction of only one project has been proposed—the Eklutna on which a report was sent to Congress last February. It calls for the building of a low dam to raise the level of Eklutna Lake, near Anchorage, 2 feet and for the driving of a 4½-mile tunnel to carry water to a generating station. The latter would have a capacity of 30,000 kw. and would supplement a 2,000-kw. plant now operated by the City of Anchorage.

The estimated cost of the development is $21,500,000, of which more than $20,000,000 it is believed would be returnable to the Government with 3 percent interest through sales of power over a 52-year period. Anchorage has a population of 19,000. Nearby are a military airfield and an army base, both of which would use some of the power. Also in the area is the Government-sponsored Matanuska Valley farming area.

BRITISH MINING CONCLAVE

REPRESENTATIVES of sixteen countries of the British Commonwealth and of eleven other nations, including the United States, are participating this month in the Fourth Empire and Metallurgical Congress. Following opening formalities and visits to laboratories and engineering works in London from July 9 to 12, five days will be devoted to technical sessions at Oxford. Upon their conclusion, two weeks will be spent in tours of mines and industrial plants in England, Scotland, and Wales. Among other localities to be visited is Cornwall, birthplace of British mining and still a tin-producing center.

The first congress, sponsored by technical institutions identified with the mineral and metal industries, was held at Wembley in 1924 and was so successful that it was planned to conduct one triennially thereafter. This schedule was maintained for a time by convening in Canada in 1927 and in South Africa in 1930. The fourth congress was to have been held in Australia in 1933, but economic conditions forced its cancellation. Prolongation of the depression and World War II combined to postpone the meeting until this year.

As is true of such gatherings in this country, the principal purpose of the Congress is to permit scientists, engineers, and others connected with mining and metallurgy to exchange ideas and bring themselves up to date on technological developments in their field. It can be appreciated what this will mean to the 600 delegates and members who have been deprived of this opportunity for nineteen years.

BOOKS FOR EUROPE

FOR the past several years CARE, a nonprofit agency approved by the Government, has done an effective job assisting Americans in sending food packages to hungry Europeans. Now it is to extend that service by furnishing "food for the mind." This plan is aimed at replenishing technical schools and libraries that were victims of Hitler's book-burning campaign and of bombings.

Libraries and educational institutions in fourteen war-torn nations are furnishing CARE with a list of their most urgent book needs. Through contributions from American people, CARE will fill the requirements as closely as possible by purchasing the best books in those fields published in the United States. Selection of titles will be based upon lists compiled by a committee headed by Dr. Luther Evans, Librarian of Congress. All books will be in English and purchased at publishers' list prices. No used ones will be sent.

For the present, the books will fall in these categories: health and welfare, medicine, dentistry, veterinary science, nursing, agriculture, English language instruction, biology, chemistry, engineering, geology library administration, mathematics, physics, physiology, psychology, sociology, and statistics. Donors of $10 or more may designate the country, the institution, and the category (but not the title) of the books to be provided, and will receive a receipt. Gifts of less than that will be pooled with others in a general fund. Contributions may be sent to CARE headquarters at 20 Broad Street, New York 5, N. Y., or to any CARE outlet in the country.

Mucking by Air Lift

EXCAVATING by water jet and mucking by air lift were used to good effect in sinking foundation caissons for a 25-ton crane in Sydney Harbor, New South Wales. The caissons have a diameter of 20 feet and were carried to bedrock through 50 feet of tough clay by means of a specially designed hydraulic auger provided with seven jets each delivering a stream at 150 psi. pressure. Three jets with 1-inch orifices projected from a central shaft surrounded by four extensible winglike pipe sections each of which terminated in a 5/8-inch nozzle. The assembly was operated from a surface platform and rotated in a horizontal plane by a turntable and hand winch.

Under the powerful force of the jets the hard clay was broken up, permitting the cutting edges of the caisson to penetrate progressively deeper under the weight of the structure. The loosened material, some of which was in sizable chunks, was handled by air lift and discharged at the surface into a flume for disposal. Upon reaching bedrock, a pneumatic sump pump was used to remove seepage. More than 15,000 cubic feet of clay had to be excavated in sinking each caisson.

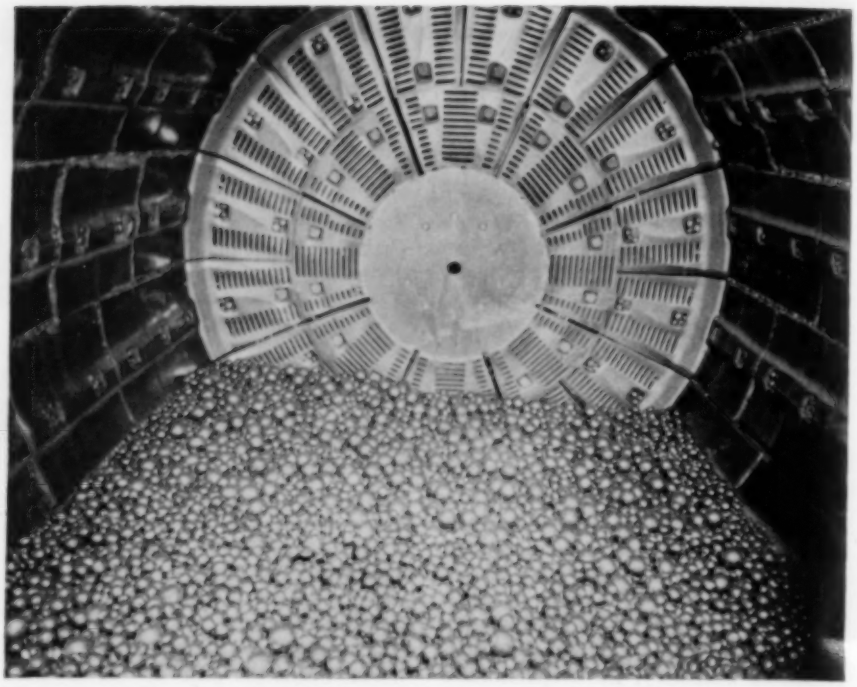

INTERIOR OF A BALL MILL

Ball mills are used for the fine grinding of many ores, but pictures of their insides are comparatively rare. This one shows the interior of a Hardinge mill, 10 feet in diameter and 12 feet long, that is used in the Patrick wash plant of Butler Brothers, producers of iron ore at Cooley, Minn. When the cylindrical vessel is revolved by a 750-hp. motor, the ore is crushed by myriads of tumbling steel balls. The latter are originally 2 inches and 1½ inches in diameter, but are reduced by attrition to the various sizes shown. New ones are added from time to time to keep the supply at around 30 tons. The mill treats about 150 tons of ore an hour, crushing it fine enough to release the silica that coats some of the iron particles. The two minerals are then separated in a classifier. The picture was obtained from "The Butler Miner" and taken by R. C. Ferguson, Hardinge Company representative.

Light-Duty Trimmer

A LIGHT-DUTY model has been added by Whiting Corporation to its line of Quickwork stamping trimmers. It is designed for job or production-line work and is said to be suitable for trimming or forming and beading, in a single pass and plane, large and relatively small steel and aluminum-alloy stampings. No dies are required. Special rolls, cutters, and hold-down fixtures are provided, depending upon the work. The machine is equipped with a stationary spindle that is adjusted by hand to take stampings of different sizes, and with a spindle that is moved by an air cylinder cushioned at both ends. The latter has a 6-inch bore and a 6½-inch stroke, uses air at a pressure ranging from 20 to 80 psi., and is controlled by a solenoid-operated foot valve. The trimmer is built for either constant- or variable-speed drive through differential-type transmission which permits the use of rolls or cutters of different diameters without change in peripheral speed. Finished work is said to be smooth because of the shearing action of the cutters.



SPINDLE ARRANGEMENT

At the top is a schematic drawing of a deep-drawn housing being trimmed by the aid of a hold-down fixture at the rate of 125 pieces an hour. Many stampings do not require special jigs and are trimmed on the flat table top by sets of rolls. A foot-controlled air valve leaves the operator's hands free for loading and unloading. The machine, left, is pictured with a representative tooling set-up.

Torch-Tailoring a Ship

BACK in 1942 the U.S. Navy Department converted the side-wheel passenger vessel *Greater Buffalo* into an aviation training ship by replacing her superstructure with a 600x102-foot flight deck. Renamed the *Sable*, she was used on Lake Michigan. With the war over, the Government sought to sell her, but she seemed destined to remain on the inland lake because she was too large to pass through the 100-foot-wide Welland Canal. However, a scrap dealer bought her and figured out a way of moving her to The Steel Company of Canada's works at Hamilton, Ont.

Using oxyacetylene torches, successive lengthwise cuts were made near the outer edges of the deck and the severed strips were pulled back to the vessel's center line with hoists. All told, 16 feet was sheared from each side, and the paddle wheels amidships were removed and lifted aboard. Finally, 40 feet of the stern was cut away to enable tugs to accompany the ship in the locks. This reduced her beam to 70 feet, and with all the shorn metal on deck she was towed to the breaking-up yard at Hamilton. The "Operation Oxygen" required 137,000 cubic feet of oxygen and 21,000 cubic feet of acetylene.

Industrial Notes

A midget single-drum air host that can be carried, installed, and used by one man has been announced by Ingersoll-Rand Company. Designated as the Size BU, it is 18½ inches long, 10¾ inches wide, and 11¾ inches high and has a lifting capacity of 600 pounds at a rope speed of 50 feet per minute. Heavier loads can be handled with the aid of sheave blocks. The new Utility hoist has

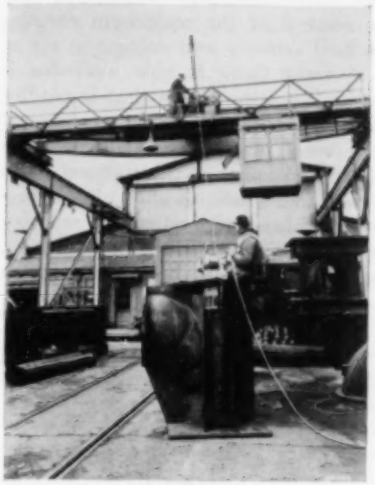

a reversible, 4-cylinder air motor that permits lowering loads under power and is provided with a wide band-type brake that insures positive hold. Compact and lightweight, the unit is suitable for a variety of skidding, hauling, and hoisting jobs in mines, on construction projects, and in industrial plants. The one shown is helping to expedite repair work on an overhead crane.

Nylatron G is a new dry bearing material offered by Polymer Corporation especially for use where both rubbing and impact are involved or where lubrication by ordinary means is not possible. It is a graphite-filled nylon supplied in rods from 0.1 to 2¾ inches in diameter, in cylinders of varying wall thicknesses and from 2 to 7 inches in outside diameter, and in strips up to 2 inches wide and from 0.01 to 0.09 inch thick.

Hewitt-Robins, Inc., has announced that its Rubber Division has started a new line of business with the manufacture of an improved rotary wire brush invented by Alfred Flohr and Charles Lavin. The product has been named Rubberlokt by reason of the fact that the bristles are embedded in rubber, a construction that has several advantages over the rigid metal or wood mounting of the customary wire-wheel brush. According to the company, the rubber core permits the bristles to flex throughout their entire length and to return to their upright position. As a result, premature wire breakage is reduced to a minimum, a maximum number of cutting points is kept in contact with the work, the bristles may be worn down to the rubber flange, and the brush conforms well to uneven surfaces. It can be used on either bench or portable tools. Six-, 8-, and 10-inch industrial sizes are available; others are to be put in production.

Curve plotting, tedious drawing, and template making usually take lots of time that can be reduced to seconds, we are informed, by a new layout tool—the Flexible Template. The latter can be laid on a blueprint, for example, to duplicate any desired contour, curve, or radius, and then locked for transfer anywhere for construction or checking purposes. When unlocked it springs back to its normal position ready for reuse. It is made of rugged spring steel and aluminum and available in lengths of 1-foot intervals.

Rubber tubing is being used for molding smooth-bore ducts of uniform diameter, straight or curved, in concrete floors, walls, columns, beams, etc., for power, light, and telephone lines, heating and ventilating systems, drain and grout holes, and for other purposes. It is inflated with compressed air, and when the concrete poured around it has set, the air is exhausted and the hose is withdrawn. It is called Ductube and can be utilized repeatedly.

Trolley-wheel bearings and pins on a twin T-rail Link belt conveyor moving through a core oven are automatically lubricated by a new type oiler designed for the purpose by J. N. Fauver Company. Including a 2-gallon reservoir, the unit is mounted 8 inches above the bearings. As each pair of wheels passes the lubricator it trips a trigger that actuates a Norgren blow valve which releases jets of oil-fogged air so directed as to completely cover the bearings and pins with a thin nondrip film. Air pressure, volume of atomized lubricant, direction and timing of "shots" are adjustable, and a Norgren regulator serves to reduce the pressure of the shop air line to approximately 40 psi.

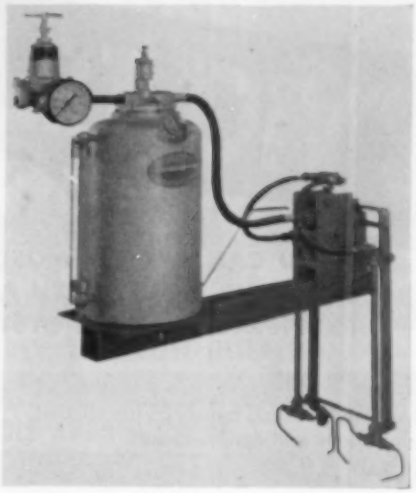

If you are one of those persons who do occasional painting around the premises, you'll welcome an announcement made recently by the Dewey & Almy Chemical Company because you'll have brushes fit for service whenever you need them. That company says it has produced a plastic bag that is impervious to

GLARE REDUCER SPRAYS ON, PEELS OFF

A green, transluscent resinous liquid that can be sprayed or brushed on factory windows and skylights to reduce summertime heat and glare is made by the Minnesota Mining & Manufacturing Company and marketed under the name of Sun-Stop Strip Coating. A gallon will cover 250 square feet to the recommended thickness of one one-thousandth inch. The liquid dries tack-free in five minutes, and in 24 hours becomes a tough film that withstands water, soap, and most window-cleaning preparations. At the end of the summer it can be stripped off or removed by air blast.

"VIC" TELLS HOW

YOU CAN GET THE MOST FOR YOUR MONEY WITH AN ALL-VICTAULIC PIPING SYSTEM

A *complete* Victaulic piping system will save you time and money on installation, alterations and maintenance!

*VICTAULIC COUPLINGS and VICTAULIC *FULL-FLOW* Elbows, Tees, and other Fittings allow pipe lines to follow any construction plans or land contours . . . add flexibility and simplicity to your piping system without costly, special engineering.

*EASY INSTALLATION of Victaulic Couplings and Fittings is assured . . . simple, quick, and dependable two-bolt design permits pipe lines to be assembled without special skill or training . . . a standard T-wrench is the only tool required to make connections. You can make repairs or changes in your piping system easily, quickly . . . no backing off of adjoining sections is necessary.

*EASY-TO-USE "VIC-GROOVER"... grooves pipe ends automatically . . . *twice as fast* . . . with half the effort of conventional pipe threader!

GET VICTAULIC DEPENDABILITY . . . A sealed union at every joint and fitting . . . stays leak-proof under pressure or vacuum . . . remains positive-locked under vibration, sag, or torque . . . eliminates trouble from costly and dangerous pull-outs or blow-offs.

YOUR PIPING COSTS can be kept at a *minimum* with a *VICTAULIC SYSTEM.*

WRITE TODAY for these two: Victaulic Catalog and Engineering Manual No. 44 . . . "Vic-Groover" Catalog No. VG-47.

FOR FULL ECONOMY...MAKE YOUR PIPING SYSTEM ALL VICTAULIC!

SELF-ALIGNING PIPE COUPLINGS

VICTAULIC

EFFICIENT FULL-FLOW FITTINGS

VICTAULIC COMPANY OF AMERICA

30 ROCKEFELLER PLAZA, N. Y. 20, N. Y.

Victaulic Inc., 727 W. 7th St., Los Angeles 14, Cal.
Victaulic Co. of Can. Ltd. 200 Bay St., Toronto 1

For Export outside U. S. and Canada: PIPECO Couplings and Fittings · Pipe Couplings, Inc., 30 Rockefeller Plaza, New York 20, N. Y.

Copyright 1949, by Victaulic Co. of America

the solvents and oils in standard paints and that will keep bristles soft and pliable for long periods. The bag is being offered to paint manufacturers for use as a premium.

To prevent rusty gas tanks that have been known to result in clogged fuel lines, strainers, and carburetor jets, the Sinclair Refining Company is offering the motoring public gasoline to which R-119, a rust inhibitor, is added.

For operations that necessitate definite control of the maximum permissible flow velocity and volume in air or gas systems there is now available a Velocity Limiting Valve that is readily interposed in any line. A product of Pneu-Trol Devices, Inc., the valve has an infinite number of calibrations up to 100 psi. and is said to shut off the line flow instantaneously when the velocity or volume for which it is set is exceeded. When that happens, the pressure in the

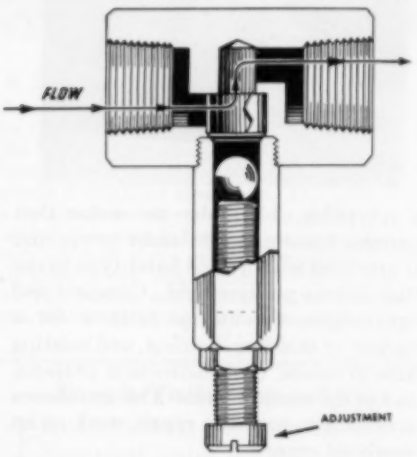

line pulls a stainless-steel ball against its seat and holds it in closed position until the pressure is exhausted, allowing it to drop back to its predetermined place. The valve is set by an adjusting screw. The device has varied uses such as shutting off the air or gas supply in case of line breakage or system failure. It is also recommended for multiple cavity moding where pieces are ejected by compressed air. In operations of this kind it is necessary to stop the flow of air to each open cavity, in turn, as soon as the piece has been blown out, and this can be done automatically by incorporating a Velocity Limiting Valve in the air hose leading to each cavity. The device is available in ¼- and ⅜-inch pipe sizes.

Valvair Corporation has announced a new line of spring-return single-solenoid valves for air pressures from 0 to 125 psi. The model has a powerful solenoid for positive seating and cool operation, "OU" type packer, shock-resisting clevis and pin, a one-piece bronze base, and is protected by a heavy sheet-metal



cover. Sizes offered are ¼, ⅜, and ½ inch, and each is available for 110-, 220-, and 440-volt 50-60 and 25-cycle current and in the following types: 2-way, 3-way open end exhaust (normally closed only), 3-way piped exhaust, and 4-way piped exhaust.

Firmly secured lengthwise between the halves of a new concrete block—called Insol—is an asphalt-treated board, ½ inch thick, that doubles the number of air spaces and gives it considerable insulating properties. Licenses to make the block can be obtained by local plants from the Insol Company of St. Paul, Minn.

A building that will follow Chinese architectural lines is being erected in New York's Chinatown as headquarters for the Chinese Merchants Association. Surmounting the red-and-yellow structure will be three floors with verandah-like extensions on all sides. The Caye Construction Company, Inc., has the contract for the building and has modeled it after pagodas that rise over the entrance gates of Chinese walled cities.

If you are planning to build a house without a basement, you might do well to follow the advise given by the U. S. Department of Agriculture. It recommends covering the site with heavy roll roofing material—55 pounds per 100 square feet—as a protection against the deteriorating effects of ground moisture. Tests have proved that a layer of this kind keeps the crawl space beneath the structure much drier than it would be with the soil exposed and under normal conditions of subfloor ventilation, thus greatly offsetting destruction through rot and rust.

It is reported from Cleveland that straw—virtually any kind—can be used to manufacture not only paperboard and the like but any kind of paper. This broad claim is made by the Kinsley Chemical Company, which has developed a process that is based on a secret chemical produced by Edward R. Timlowski, the company's technical director. The substance makes it possible to separate the straw into its individual fibers without reducing their length, thus making it a suitable raw material for high-grade paper. Twelve plants designed in accordance with the new process are planned for widely scattered parts of the globe, including the United States.

MODERNIZATION *Demands...*

G-E Motor Control Centers

for EASY, LOW-COST INSTALLATION

FLEXIBLE ARRANGEMENT

SIMPLIFIED SERVICING

These advantages, plus many more, are yours when you buy economical, G-E motor control centers. Only 12 inches deep, front connected, pre-engineered, can be factory assembled, wired, and tested. Individual sections can hold combinations of two or more sizes of starter units. (NEMA Size 1, 2, 3, and 4 for 1 to 100-hp a-c motors, 440 volts or below). Standard starters in standard vertical sections simplify installation, servicing, and stocking spare parts, yet permit flexible arrangements.
In addition, each unit is "wrapped in steel," has built-in short-circuit and overload protection. Wiring troughs are five inches wide, terminal and incoming bus may be at top or bottom as you prefer—all easily accessible. Wiring time is cut because "clothespin contacts" (below) connect to incoming power in one quick shove. Write now for more details in Bulletin GEA-4979. *Apparatus Department, General Electric Company, Schenectady 5, N. Y.*

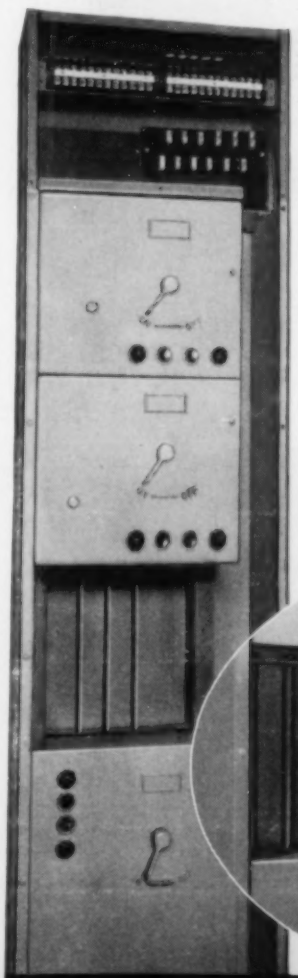

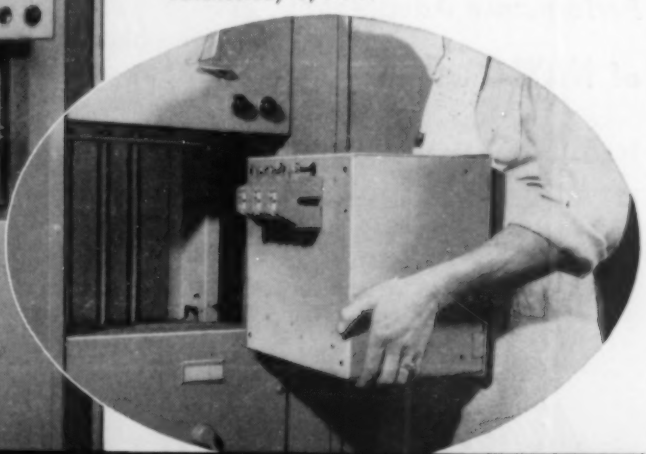

GENERAL ELECTRIC

730-2

FACTS ON

LIGHT-WEIGHT PIPE

FOR MINING SERVICE

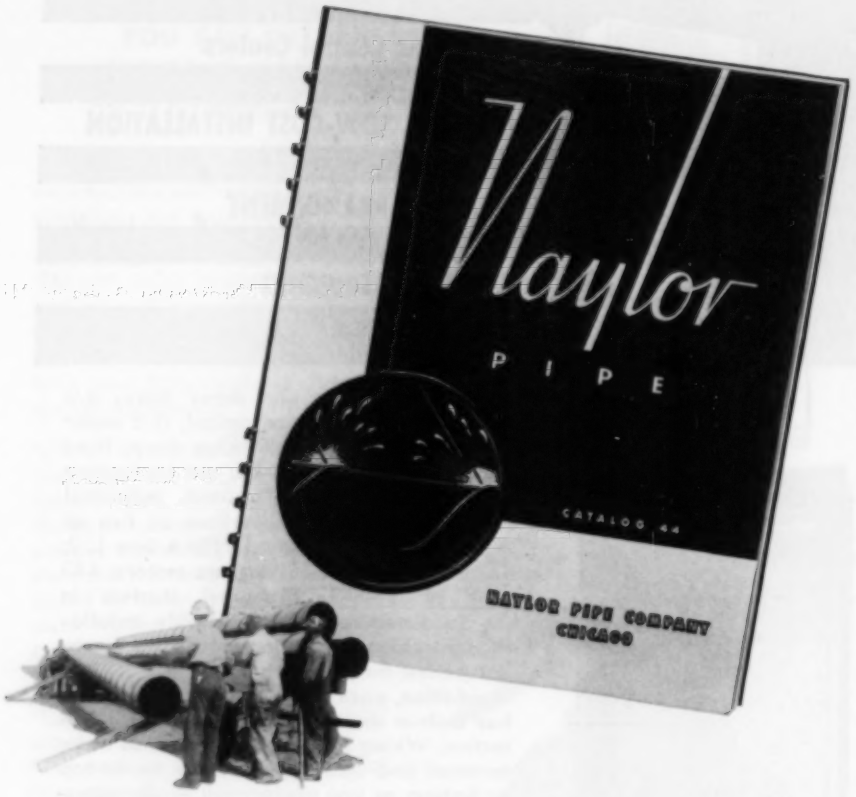

This Helpful Book Gives Full Data on Applications and Performance Advantages of **NAYLOR PIPE**

If you have not already received a copy of this fully-illustrated guide for pipe users, write for it today.

Find out how Naylor light-weight pipe can serve you better on ventilating lines, high and low pressure water lines, air lines, hydraulicking, dewatering, drainage, suction lines, tailings lines.

Naylor Pipe

NAYLOR PIPE COMPANY

1245 East 92nd Street, Chicago 19, Illinois

New York Office: 350 Madison Avenue, New York 17, N. Y.

Industrial Literature

Ortman-Miller Machine Company, Inc., Hammond, Ind., will send upon request descriptive literature concerning industrial power cylinders of a new design. The units are of tie-rodless construction for installation in a minimum of space and may be operated by air, water, or hydraulic power. They are available in bore sizes ranging from 1½ to 8 inches and are said to give continuous service at speeds up to 1500 cycles a minute.

Corrosion-resistant piping materials are the subject of a 32-page circular obtainable from Crane Company, 836 South Michigan Avenue, Chicago, Ill. The publication contains descriptions, illustrations, and technical data on noncorrosive valves, fittings, fabricated piping, and pipe coils designed to operate under a wide range of conditions. Included are eight pages of recommendations of types of piping and fittings best suited for each corrosive liquid handled.

Bulletin 125 of Hose Accessories Company describes its complete line of hose clamps for industrial and construction use. More than 160 different sizes and kinds are covered. It also contains information on a group of undersized hose clamps designed to fit the newer types of hose having small outside diameters. Copies of the bulletin may be obtained by writing to the company at Seventeenth & Lehigh Avenues, Philadelphia 32, Pa.

What is believed to be the most extensive bibliography available on the subject of industrial uses of radioactive tracers has been compiled and published by Arthur D. Little, Inc., the well-known firm of research engineers. In addition to sources of general background and survey articles there are references to articles covering specific fields such as petroleum, mining, metallurgy, textiles, pharmaceutical, etc. Copies of the bibliography can be obtained free of charge from the company at Cambridge 42, Mass.

Air-Powered Equipment for Oil-Well Drilling is the title of Form 157 obtainable from Ingersoll-Rand Company, 11 Broadway, New York 4, N. Y. Compressors, pumps, cranking motors, hoists, and air tools designed or suitable for oil-field work are described and their uses cited. The bulletin explains how pneumatic equipment, if properly applied, can lighten labor considerably, prevent many of the dangers involved, and reduce operating and maintenance costs.

W. C. Dillon & Co., Inc., 5410 West Harrison Street, Chicago 44, Ill., will send to interested parties a folder describing its low-range, universal-type testing machine. It is intended for use in laboratories where raw materials or finished parts are subjected to tension, compression, or elongation tests. The equipment is fitted with an 8-inch dial having four concentric scales which may be calibrated in tenths, ounces, pounds, or kilograms. It is designed to test paper, thread, fabrics, plastics, film, cord, leather, wire, glass, wood, ceramics, insulating material, adhesives, or virtually any material light enough to fall within the range of the scales.

Flexible shafting for power drives and remote controls is the subject of a manual recently published by Elliott Manufacturing Company, 350 State Street, Binghamton, N. Y. Designed for the easy transmission of power to out-of-the-way places, the shafting may be used with drilling, reaming, grinding, sanding, polishing, or wire-brushing machines; as a flexible coupling between machines; for power take-off; for the remote

control of valves, dampers, etc.; and for numerous other purposes. It is made in a range of sizes to meet these varied requirements. In addition, the company manufactures a line of light- and heavy-duty machines to power the shafting. These may be fitted for floor, bench, or overhead mounting.

New York Belting & Packing Company will send upon request a booklet discussing its varied line of air hoses for welding, service station use, mining, pneumatic tools, and other services. The publication gives complete specifications and data on hose construction and application, as well as instructions in good air-hose engineering practice. Also available is a 24-page manual dealing with conveyor and elevator belting for operations such as coal and iron mining, food processing, packaging, etc. Methods of handling grain, stone, sand, gravel, soda ash, cement, foundry sand, and hot materials are included, as well as information on the selection, application, carrying capacities, and approximate belt weights.

Air valves suitable for use with pressures up to 150 psi. are described in Catalog 301 of Gerotor May Corporation. Made in five sizes from ¼ to 1 inch, they are available with hand, foot, solenoid, cam, or pilot control. Working drawings and cutaway views of each of the 21 different models are included, as well as circuit layouts showing the important types of control, the arrangement of the air equipment, and the operating sequence. A second publication, Catalogue 201, describes the 90-odd Gerotor 4-way hydraulic valves and gives details about their installation, functioning, and control. Copies of both catalogues may be secured from the company at Baltimore 3, Md.

Three bulletins have been made available for free distribution by The Bellows Company, 222 West Market Street, Akron, O. Bulletin P-400 describes air-powered impact and arbor presses for riveting, staking, forming, pressing, stamping, and other work with a reduction in production costs and with greater safety and less human effort, it is claimed. Bulletin BM20-R deals with the construction and application of Bellows nonrotating air motors—double-acting, reciprocating cylinders with built-in valves and controls. They have numerous industrial applications where pushing, pulling, or lifting are involved. Bulletin HC-600 covers the Bellows Hydro-Check, a device designed for use with sensitive tools or delicate work-feeding jobs where a high degree of control must be exercised. It consists of a hydraulic cylinder and an air cylinder, the former acting as a check on the latter to assure smoothness of operation.

Instruments for process measurement and control are described and their installation and operation discussed in a 32-page bulletin recently issued by The Foxboro Company. They may be pneumatically or electrically controlled and are used for regulating process variables such as temperature, pressure, conductivity, pH, flow or liquid level, humidity, force, position, speed, etc. Types shown include a device that continuously makes as many as six different-colored temperature recordings on one circular chart; another that makes as many as 24 individual and periodic temperature checks in sequence on one chart; a scanning recorder for successively registering 24 separate but related temperature measurements; and an indicator which, when fitted with a multiple-key selector switch, permits the rapid observation of 48 individual readings of a process variable. Copies of Bulletin No. 427 may be obtained from the company at Foxboro, Mass.

NOW IS THE TIME...
to cut job costs

with the new

SIZE 8U ROTARY ELECTRIC IMPACTOOL

Rated capacity ⅝" bolt size

Not eleven tools to do eleven jobs—but eleven tools in *one*—a real multi-purpose tool—an engineering marvel made possible by the amazing power produced by thousands of rotary impacts.

There is no kick or twist even on the toughest jobs—motor burnouts are eliminated because the motor continues to run smoothly even if you stall the spindle completely—and you will save time and money on all operations—nut running as much as 90%.

An I-R Impactool pays for itself in 30 days with normal use.

Ask your Ingersoll-Rand distributor for a demonstration,

Ingersoll-Rand
11 Broadway, New York 4, N. Y.
ORIGINATOR OF IMPACTOOLS—air and electric

KIT No. 1—IMPACTOOL, with standard equipment, plus a complete assortment of attachments in a Handy De Luxe Case
110 V or 220 V, AC or DC models available

420-18

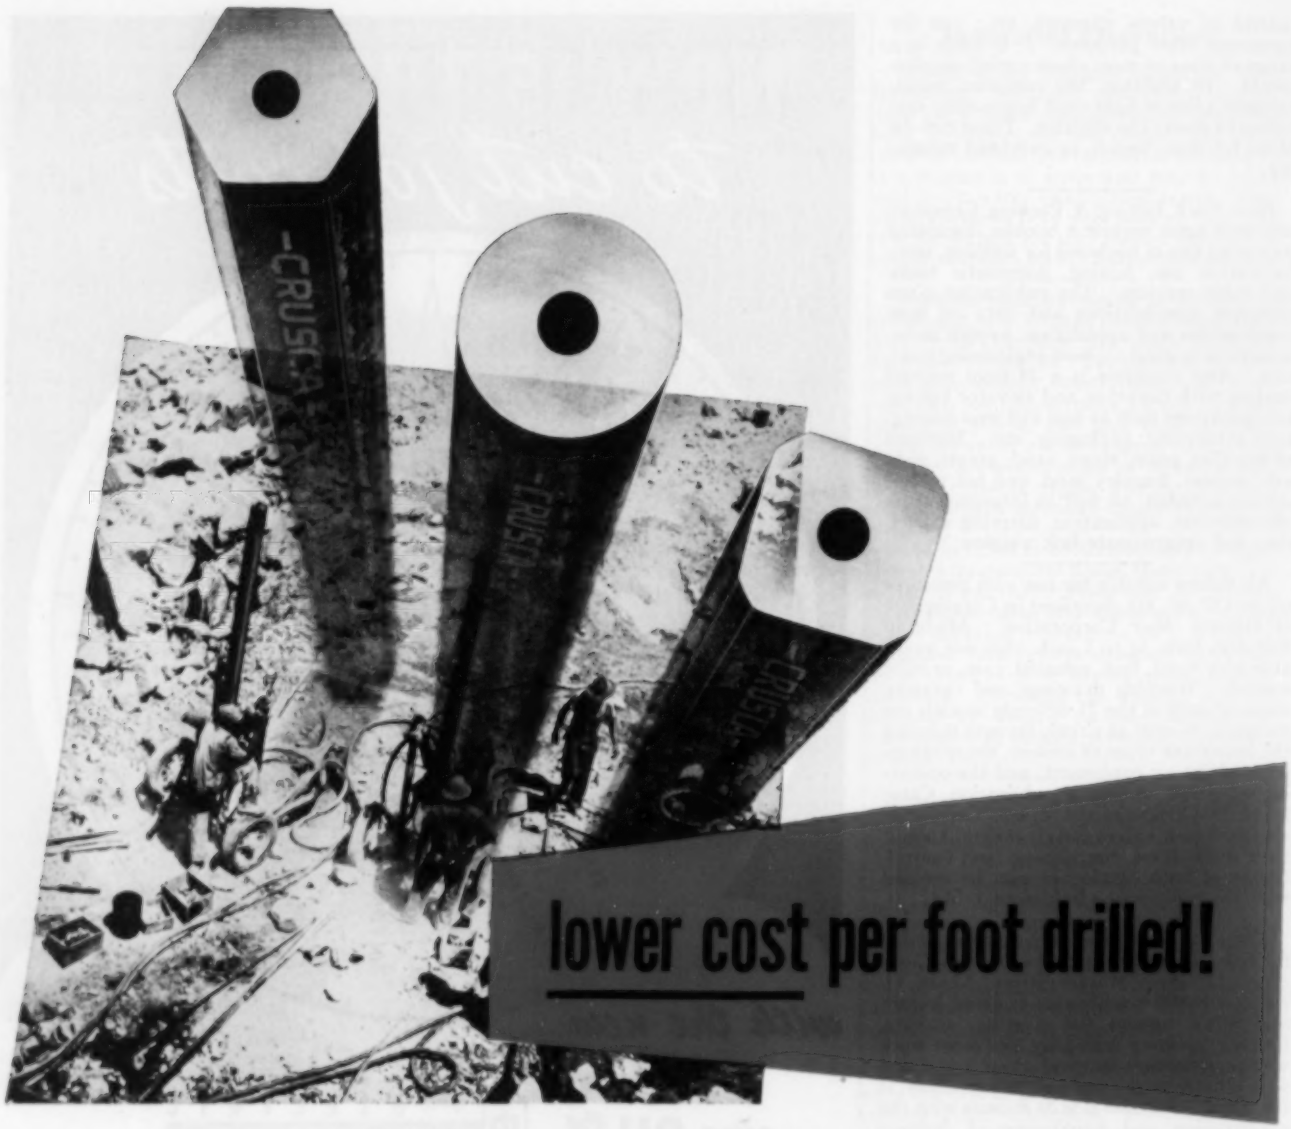

Controlled hardenability, excellence of stress-bearing surfaces and uniform processing all contribute to the assurance of *lower cost per foot drilled* when you use Crucible Hollow Drill Steel.

And to back up this fact, *every lot* of Crucible Hollow Drill Steel is given an accelerated fatigue test which is correlated with *actual granite drilling*. That means rugged dependability is built right into Crucible Hollow Drill Steel.

So when you say, "Give me Crucible" you know that lot after lot is produced to chemical and structural uniformity—proven by performance under service conditions. What's more, you get fast field service, unsurpassed metallurgical advice, countrywide stocks. Check our local representative, he can help you.

CRUCIBLE STEEL COMPANY OF AMERICA,
Chrysler Building, 405 Lexington Ave., New York 17, N. Y.
Branches, Warehouses, and Distributors in Principal Cities.
Consult your Telephone Directory or Thomas' Register for the nearest office.

CRUCIBLE first name in special purpose steels

HOLLOW DRILL STEEL

HIGH SPEED • TOOL • STAINLESS • ALLOY • MACHINERY • SPECIAL PURPOSE • STEELS

New hose "light as lamp cord" cuts weight 50%

B. F. Goodrich hose doubles flexibility, ease of handling

HERE'S an air hose specially designed for the most efficient use of all small air tools. Twice as light, more flexible, it allows greater freedom of movement, makes it easier to get in and out of tight corners, lets you use full pressure with your tools.

50% less weight—Now you can have a lightweight line that is adequate for the pressure the tool requires. 100 ft. of the new Highflex air hose weighs 8.8 lbs. in the ¼" size; ordinary hose weighs 20 lbs. And all sizes of Highflex give you substantially similar savings.

More flexibility—The higher flexibility of Highflex makes tools easier to use in close quarters, for hard-to-get-at jobs. Highflex cuts worker fatigue, speeds up all operations, because there is less line to drag about and keep free.

Full tool pressure—Highflex has a high margin of safety for any small air tool —250 lbs. working pressure. Single ply, double braid construction. Low expansion under pressure, minimum contraction of length.

Oil won't harm it—Tools wear out quickly when not properly lubricated. With Highflex on your tools, you can lubricate them properly without fear of oil causing hose to swell and flake, cutting air volume or jamming the tool. Highflex is completely oil proof —dragging it through oil won't damage the cover.

Other Highflex features—The high visibility of its red cover makes Highflex easy to keep in sight and unsnagged. Cover resists checking, snagging, and abrasion. Takes up less storage space when coiled. Ask your BFG distributor to show you Highflex air hose. *The B. F. Goodrich Company, Industrial and General Products Division, Akron, Ohio.*

Air Hose BY

B.F.Goodrich

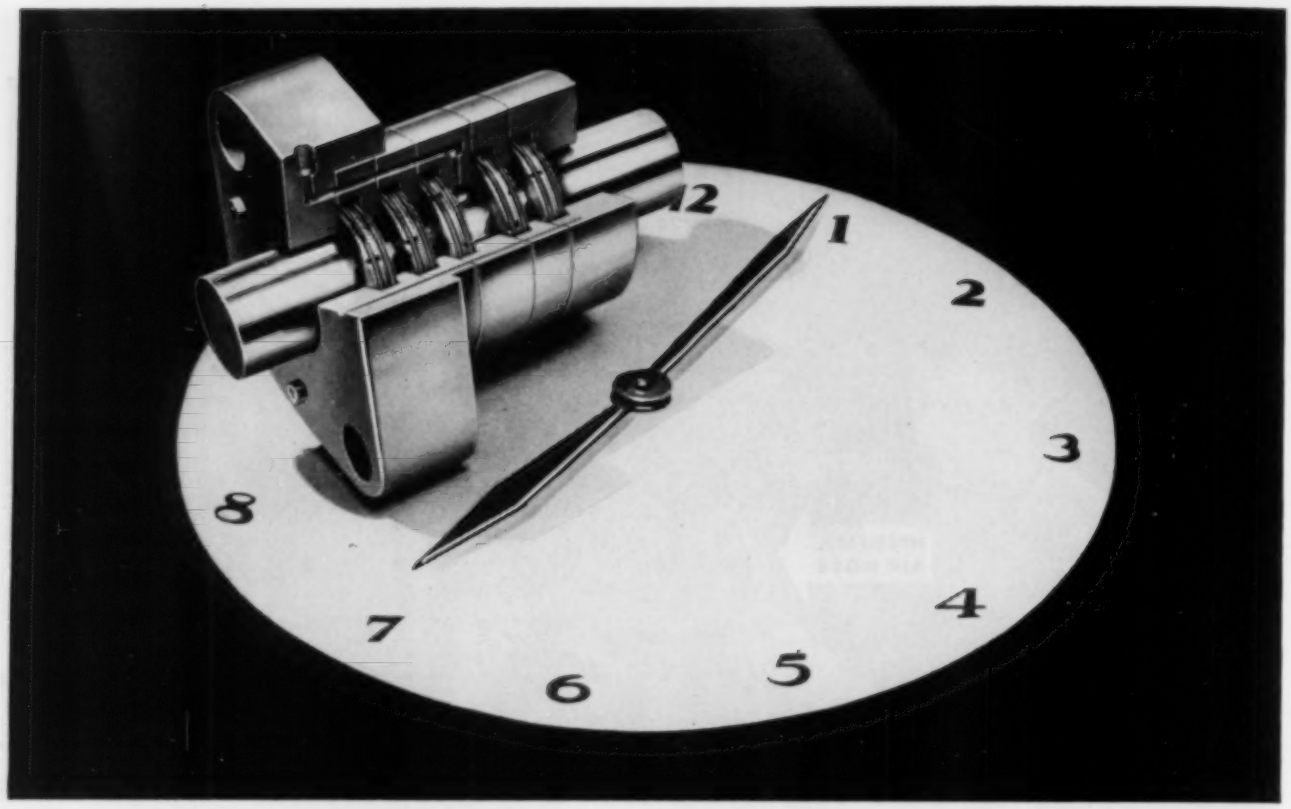

A Timely Message for Compressor Operators

Actual results from the field are daily proving the thorough-going dependability of Cook Rod Packings. In fact, their ability to provide round-the-clock service—day in, day out—year after year—has made Cook Packings the universal standard for refinery, repressuring, recycling, and natural gas pumping compressors.

This overwhelming acceptance is due to three things:

1. Cook Packings are the result of the "know-how" gained from 61 years of specialization in the manufacture and development of packings and piston rings.
2. Cook Packings offer a wide choice of ring materials for almost any service requirement. These include Cook Graphitic Iron, an exclusive ring material which is famous for its ability to keep friction and wear to a minimum. Also, Cookmet (bronze), Babbitt, Bakelite and Graphitized Bakelite rings for use as service and operating conditions may indicate.
3. Cook Packings are backed by a field organization of trained engineers who are always ready to cooperate with you in getting the best possible service from your packings.

Why not check today to find out what Cook Packings can do for you? A call to the office nearest you will receive prompt and courteous attention.

C. Lee Cook Mfg. Co., Louisville, Ky. Branch Offices in: Baltimore, Boston, Chicago, Cleveland, Houston, Los Angeles, Mobile, New Orleans, New York, San Francisco and Tulsa.

COOK

ROD PACKINGS



. . . SEALING PRESSURES SINCE 1888 . . .

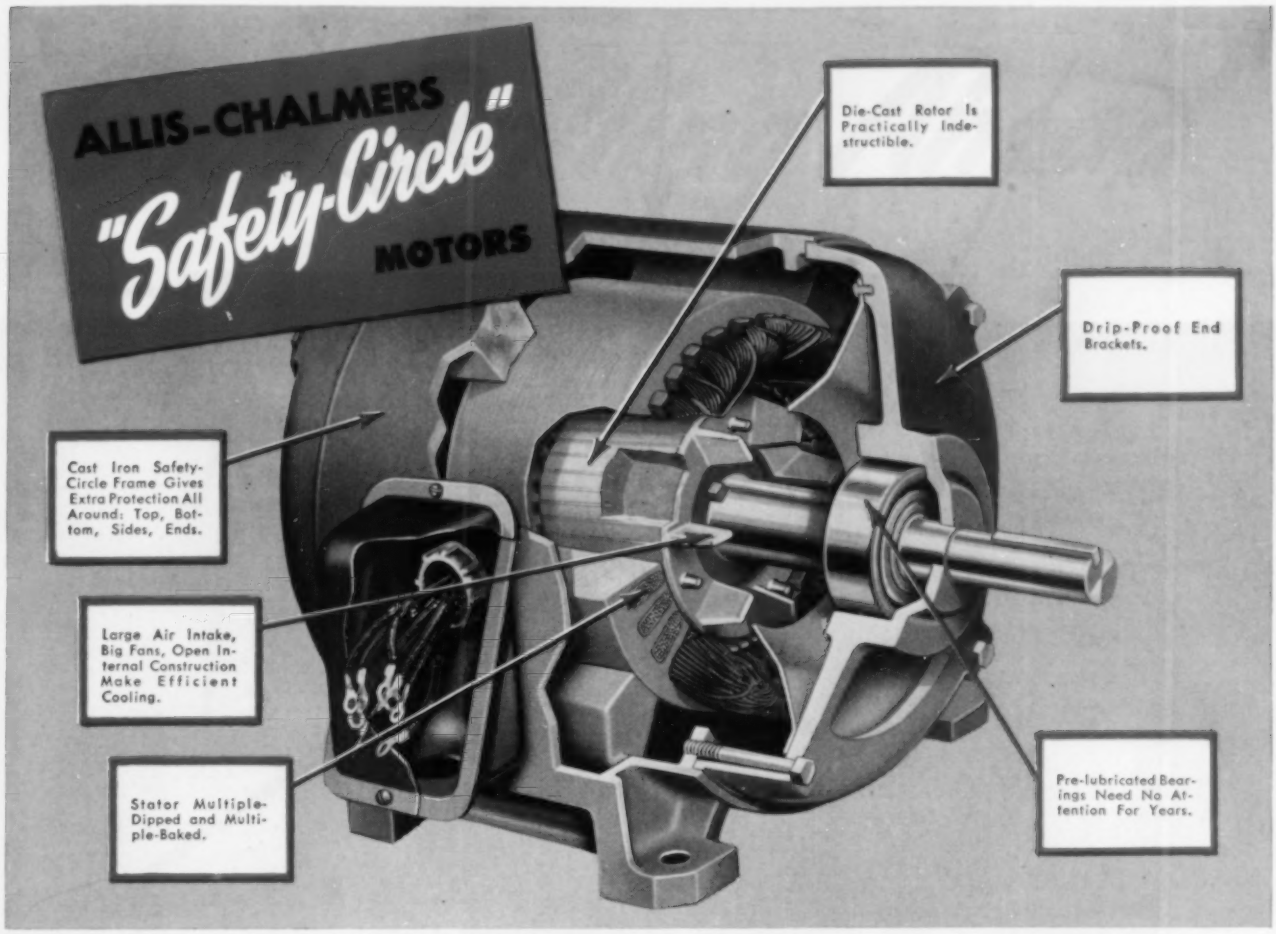
ALLIS-CHALMERS
"Safety-Circle"
MOTORS
Die-Cast Rotor Is Practically Indestructible.
Drip-Proof End Brackets.
Cast Iron Safety-Circle Frame Gives Extra Protection All Around: Top, Bottom, Sides, Ends.
Large Air Intake, Big Fans, Open Internal Construction Make Efficient Cooling.
Stator Multiple-Dipped and Multiple-Baked.
Pre-lubricated Bearings Need No Attention For Years.

HOW SAFETY-CIRCLE

Means Motor Dependability

EXTRA PROTECTION means extra dependability. That's why Allis-Chalmers protects the working parts of the motor with the exclusive SAFETY-CIRCLE. Compare this motor with motors of less rigid construction. The SAFETY-CIRCLE motor will not distort in mounting or under strain. And you get the extra protection of drip-proof end brackets at no premium.

EXTRA PROTECTION INSIDE, TOO

Stator is multiple-dipped and multiple-baked in special insulating varnish. Rotor is die-cast aluminum. Stator is mounted in four longitudinal ribs which leaves plenty of air space between stator and frame. Large fans cast integrally with the rotor and ample air intakes keep temperatures well within rated limits. *Ball bearings are factory-lubricated and require no further attention for years.*

When you shop for motors, remember SAFETY-CIRCLE gives you *extra protection, extra dependability* and *lower operating costs.*

For details on SAFETY-CIRCLE advantages, see your A-C Authorized Dealer or Sales Office or write for Bulletin 51B6210B. Sizes 1 to 20 hp, 326 frames and smaller. *Safety-Circle, Texrope* and *Vari-Pitch* are Allis-Chalmers trademarks.

ALLIS-CHALMERS, 1000A SO. 70 ST. A-2691
MILWAUKEE, WIS.

ALLIS-CHALMERS

Sold . . .
Applied . . .
Serviced . . .

by Allis-Chalmers Authorized Dealers, Certified Service Shops and Sales Offices throughout the country.

CONTROL — Manual, magnetic and combination starters; push button stations and components for complete control systems.



TEXROPE — Belts in all sizes and sections, standard and Vari-Pitch sheaves, speed changers.

PUMPS — Integral motor and coupled types. Sizes and ratings to 2500 GPM.

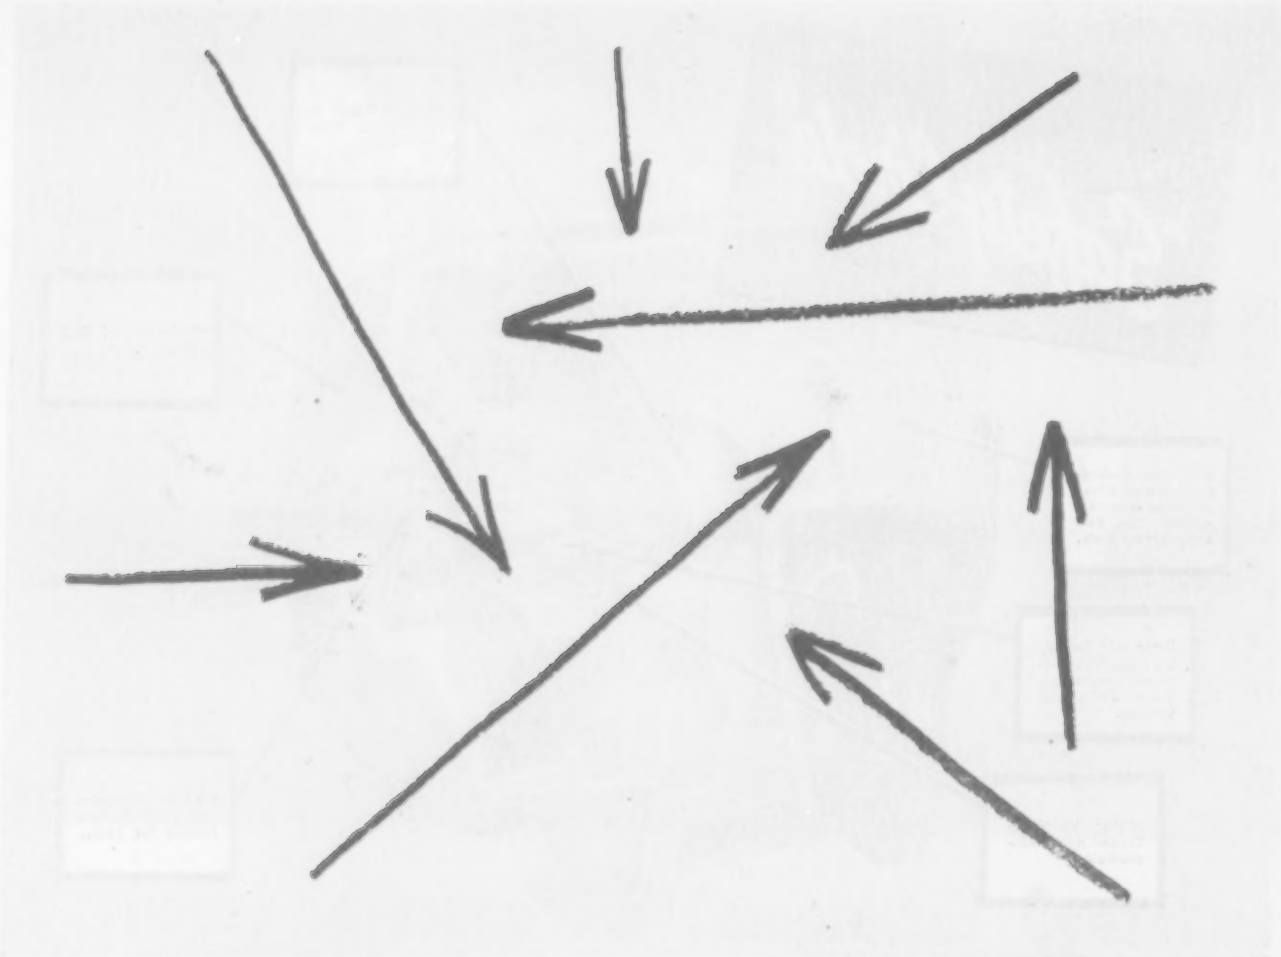

They're all the same to a TIMKEN® bearing

NO MATTER from what direction the loads may come, Timken® roller bearings carry them all safely—dependably. Timken bearings are tapered in design—carry both radial loads, thrust loads and any combination of them.

With Timken bearings in your product, auxiliary thrust bearings and thrust plates are eliminated. Designs can be simplified, space saved, cost reduced.

You have a better-working product, too. The tapered construction of Timken bearings prevents end-play and holds shafts in proper alignment. Wear on surrounding parts is reduced; gears mesh more smoothly.

And Timken tapered roller bearings give you these added advantages: Due to the line contact between rolls and races, they have extra load carrying capacity. True rolling motion and smooth surface finish practically eliminate friction. Timken bearings permit the use of closures which keep lubricant in—dirt out. And since they're made of Timken fine alloy steel, Timken roller bearings normally last the life of the machine in which they are used.

Dependable performance and public acceptance of Timken bearings have made Timken-bearing-equipped products first choice throughout industry. They add a valuable sales feature in your product—build greater acceptance among customers. When you specify bearings for your product, specify "Timken". And when buying new equipment, always look for the trade-mark "Timken" on the bearings. The Timken Roller Bearing Company, Canton 6, Ohio. Cable address: "TIMROSCO".

50th birthday of the company whose products you know by the trade-mark: TIMKEN

TIMKEN 1899 50 YEARS 1949

TIMKEN

TRADE-MARK REG. U. S. PAT. OFF.

TAPERED ROLLER BEARINGS

Good Drilling Ahead

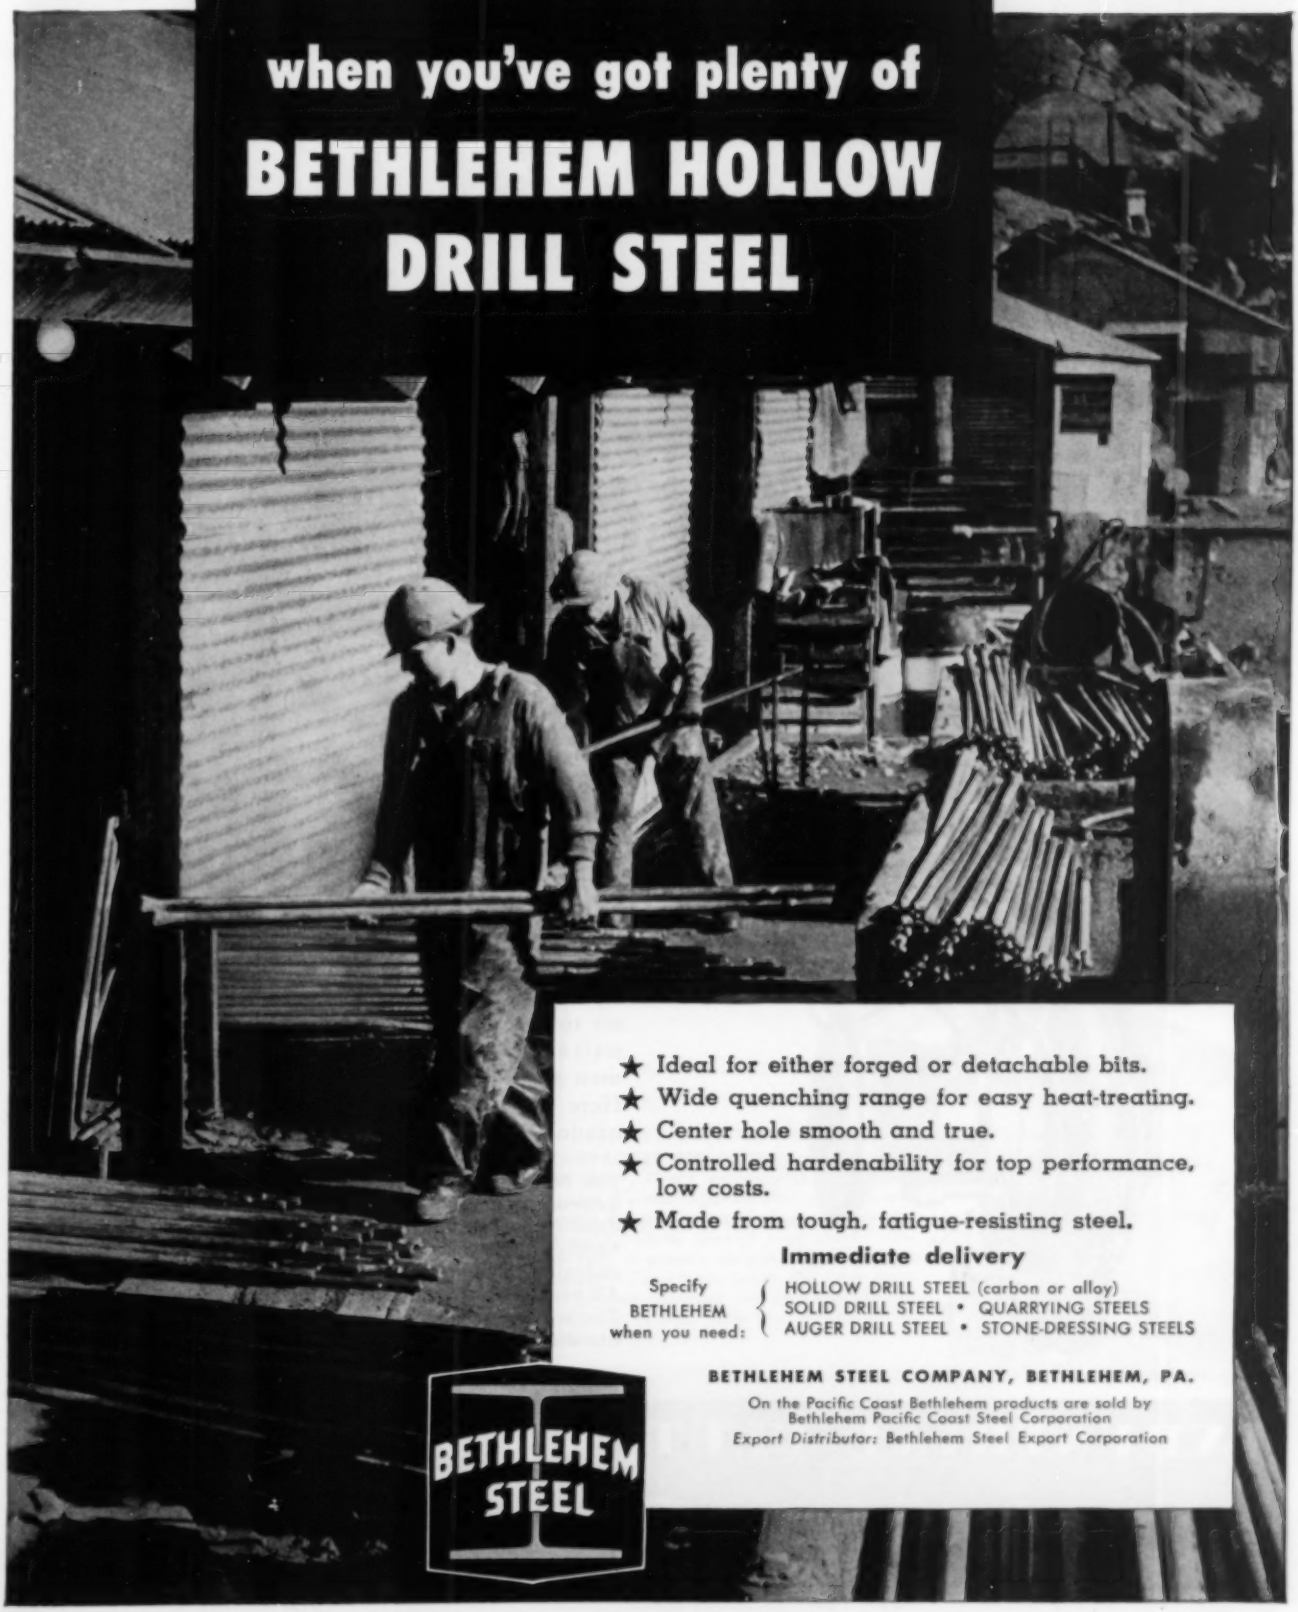
when you've got plenty of
BETHLEHEM HOLLOW
DRILL STEEL
★ Ideal for either forged or detachable bits.
★ Wide quenching range for easy heat-treating.
★ Center hole smooth and true.
★ Controlled hardenability for top performance, low costs.
★ Made from tough, fatigue-resisting steel.
Immediate delivery
Specify BETHLEHEM when you need:
HOLLOW DRILL STEEL (carbon or alloy)
SOLID DRILL STEEL • QUARRYING STEELS
AUGER DRILL STEEL • STONE-DRESSING STEELS
BETHLEHEM STEEL COMPANY, BETHLEHEM, PA.
On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation
Export Distributor: Bethlehem Steel Export Corporation
BETHLEHEM STEEL

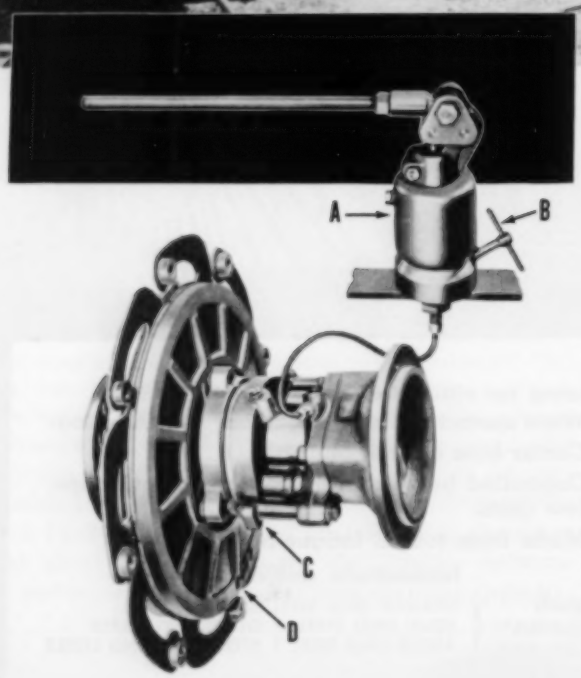

ON THE BIG ROCK REMOVAL PROJECTS

in heat or cold, in high altitudes or low, the I-R *Mobil-Air* Compressors with *Flex-Disc* Clutch and *Hydro-Shifter* are a reliable, continuous source of air to the drills and hammers. They are easy to start and keep going unattended letting the workmen stay on the job of getting out the rock. Here we see progress being made on the Colorado Big Thompson Project for water supply.

The *Flex-Disc* Clutch (D at left) meets the exacting requirements of portable compressor duty. Finger-tip hydraulic control is provided by the pump reservoir and handle (A) for disengaging, and the release valve (B) for engaging the clutch through the hydraulic jack unit (C). All parts are built for low maintenance and long service. The seldom needed replacements are readily made without disturbing the rest of the compressor.

INDUSTRIAL CLUTCH CORPORATION

Waukesha Wisconsin

Why buy piping the hard way When CRANE supplies everything?

ONE SOURCE OF SUPPLY
RESPONSIBILITY
STANDARD OF QUALITY

For Air Service Piping—as for a superheater or a boiler feed installation—the most likely place to get piping equipment is Crane. For regardless of fluids or working conditions, Crane places the world's largest selection of valves, fittings, pipe and accessories right at your finger tips. One catalog contains everything for the job.

Your local Crane outlet can better serve all your needs—either from stock, from the factory, or from other Crane Branches.

This **Single Source of Supply**—unequaled for completeness—can simplify every piping procedure, from design to erection and maintenance of any system. **One Responsibility** for materials helps to give you better installations, avoids needless and costly delays. **High Quality** in every item from Crane certifies to dependable performance from every part of your piping systems.

CRANE CO., 836 S. Michigan Ave., Chicago 5, Illinois. *Branches and Wholesalers Serving All Industrial Areas.*

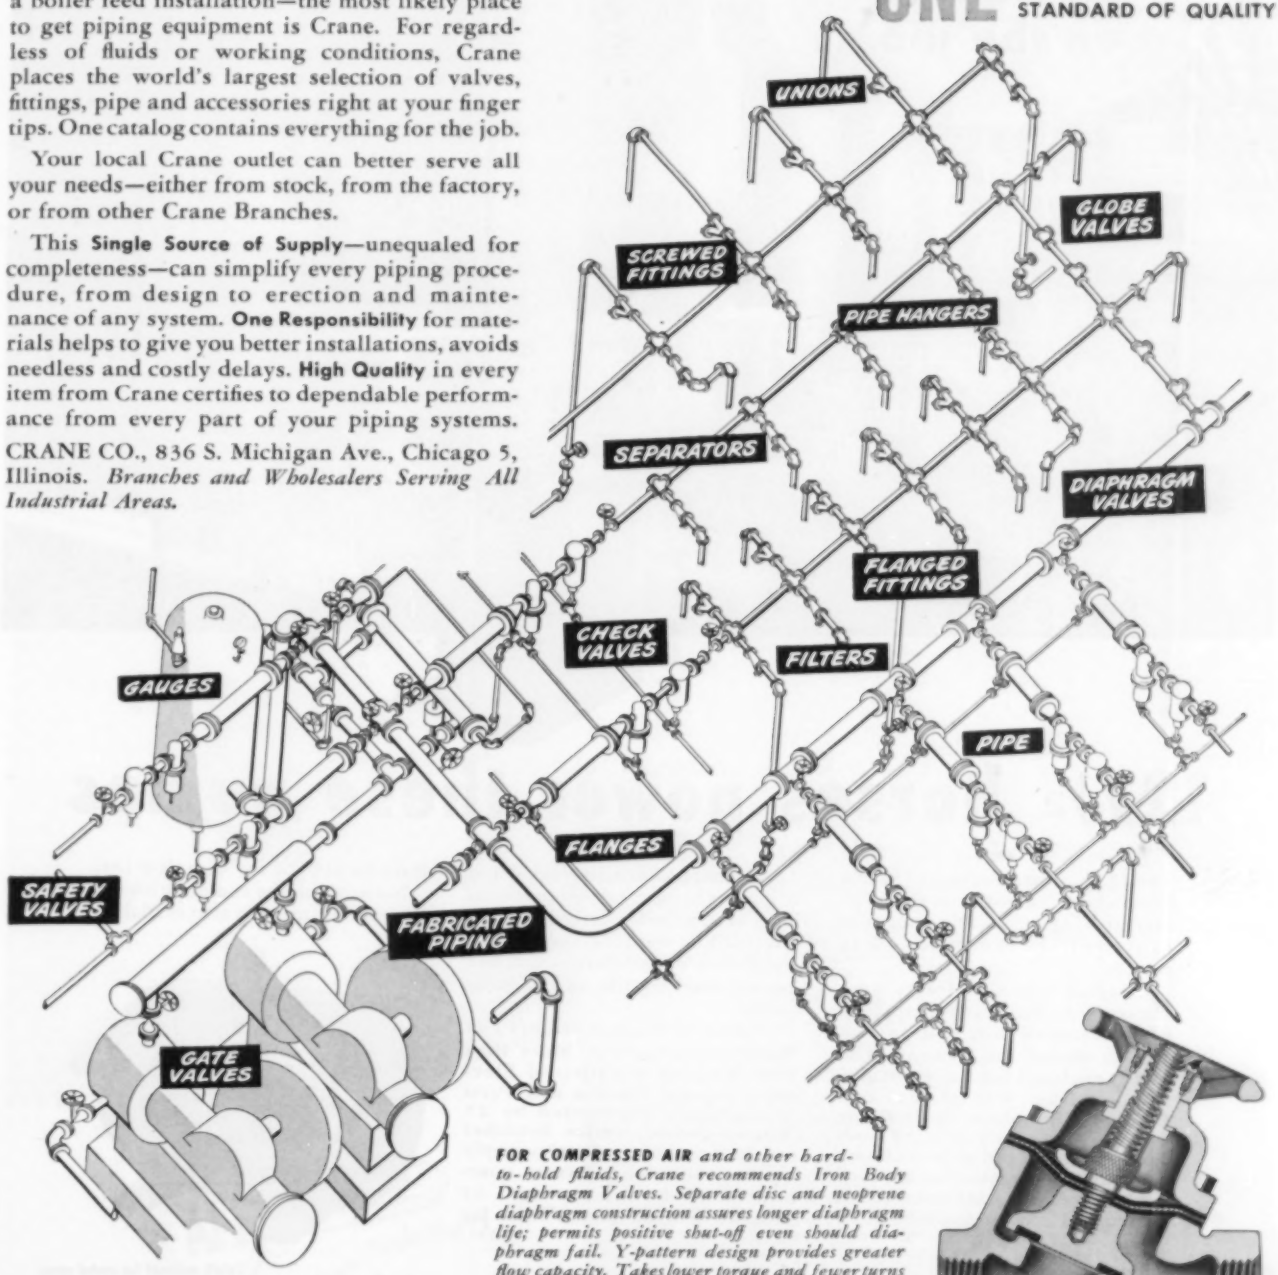

FOR COMPRESSED AIR *and other hard-to-hold fluids, Crane recommends Iron Body Diaphragm Valves. Separate disc and neoprene diaphragm construction assures longer diaphragm life; permits positive shut-off even should diaphragm fail. Y-pattern design provides greater flow capacity. Takes lower torque and fewer turns to open or close. Working pressure: 150 pounds, max.; 180 deg. F. max. Sizes: ½ to 4-inch. Write for folder AD-1761.*

EVERYTHING FROM . . .

VALVES • FITTINGS
PIPE • PLUMBING
AND HEATING

CRANE

FOR EVERY PIPING SYSTEM

127½ horses power these pumps

The 17 paint transfer pumps in this installation are powered by a battery of Wagner totally-enclosed fan-cooled 7½ horsepower motors.

Wagner type CP Motors were chosen for this outdoor application because of their built-in protection against the elements. The totally-enclosed fan-cooled motor, originated by Wagner, has two frames—a protective outer frame that guides a strong, cooling draft over the motor, and an inner frame that completely seals the heart of the motor against the entrance of dust, dirt, fumes or moisture.

Wagner makes a diversified line of motors to meet any requirement. They are efficiently designed, compactly built without sacrificing sturdiness or efficiency, and are known for long life and dependability.

Buyers of Wagner Motors Get Nationwide Service! More than 450 Wagner Authorized Electrical Service Stations and Parts Distributors augmented by 25 Wagner-owned Service Branches are ready to immediately supply on-the-spot service, factory guaranteed exchange motors, or genuine Wagner parts. Write for Bulletin MU-24 for complete list: Bulletins on the complete line of Wagner Motors are also available.



Totally-enclosed fan-cooled motor

Wagner Electric Corporation
6418 PLYMOUTH AVE. ST. LOUIS 14, MO., U. S. A.

Consult Wagner Engineers on all Electric Motor Problems

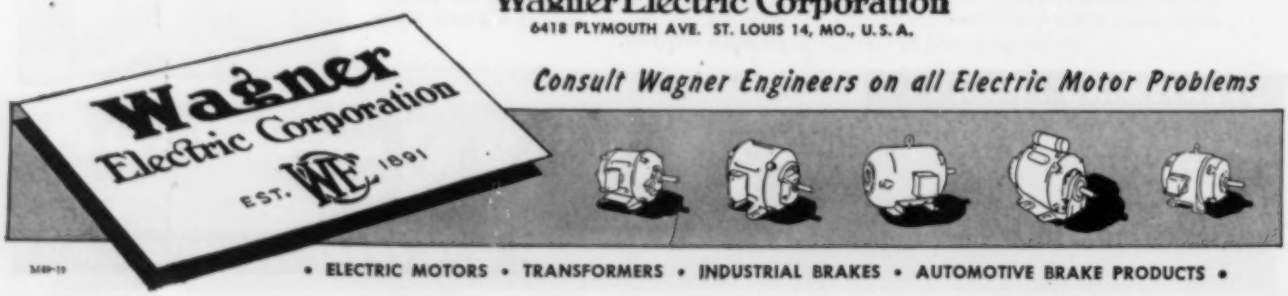

MB-19

• ELECTRIC MOTORS • TRANSFORMERS • INDUSTRIAL BRAKES • AUTOMOTIVE BRAKE PRODUCTS •

Enthusiasm pays

Enthusiasm is hard to buy . . . it's spontaneous. Ingersoll-Rand Air Tools help instill that invaluable enthusiasm by enabling operators to do their work with less effort.

*Three riveting crews using 16 lb. riveters had extreme difficulty maintaining production due to fatigue. New I-R lightweight, powerful riveters weighing 6 lbs. less were put on the job. Result—the men were happy, no more complaints about fatigue—production was easily maintained and the new equipment paid for itself in 12 days.

Give your workers and yourself the advantages of I-R Air Tools. Just call your Ingersoll-Rand branch for a demonstration in your own plant. They will gladly make the arrangements without cost or obligation to you.

Ingersoll-Rand

11 Broadway, New York 4, N. Y.

AIR POWER
The Key to Lower Production Costs

*Write for Form 5010A, the "Little Book with Big Money-Saving Ideas," which contains nearly 100 authentic case histories on how I-R Air Tools quickly paid for themselves.

323-8

ROCK DRILLS • COMPRESSORS • AIR TOOLS • BLOWERS • CENTRIFUGAL PUMPS • OIL & GAS ENGINES • CONDENSERS •

AIR-MAZING FACTS

1. WHAT MAKES THE SKY BLUE?
Answer: dirt! The delicate color of the sky is caused by floating dust particles in the upper atmosphere.

2. AIR THAT SCRATCHES STEEL!
Dirty air can scratch the polished insides of compressors and force them into early retirement. Leading manufacturers prevent this by using Air-Maze filters to trap damaging dirt and dust.

3. FLAME ARRESTER.
Air-Maze tank vent flame arresters keep dangerous sparks and flames out of tanks containing inflammable liquids. It's another one of the hundreds of filter types designed by Air-Maze—the filter engineers.

WHETHER YOU build or use engines, compressors, air conditioning and ventilating equipment, *or any device using air or liquids*—the chances are there is an Air-Maze *engineered* filter to serve you better. Representatives in principal cities, or write Air-Maze Corporation, Cleveland 5, Ohio.

AIR-MAZE

The Filter Engineers

AIR FILTERS
SILENCERS
SPARK ARRESTERS
LIQUID FILTERS
OIL SEPARATORS
GREASE FILTERS

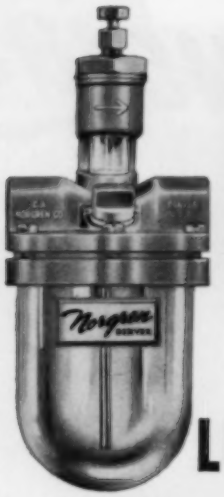

Proved BY 20 YEARS OF SERVICE

Norgren LUBRICATORS

Automatically create *air-oil fog* that coats every moving part of air-operated equipment. Reduce wear in use. Stop corrosion when idle. Pay big dividends in improved air equipment operation, lower maintenance costs. Write C. A. Norgren Co., 222 Santa Fe Drive, Denver 9, Colorado.

Norgren ***Lubricators, Regulators, Filters, Valves, other Air Controls, Hose Assemblies.***

BUY ALL THREE FOR ONLY $6.00

or

Any Combination at Proportionate Savings

Price Individual Books	Per Copy
Compressed Air Data	$3.00
Cameron Hydraulic Data	3.00
Cameron Pump Operators' Data	2.00

COMPRESSED AIR MAGAZINE, 942 Morris Street, Phillipsburg, New Jersey.
Please send me:

- ☐ Compressed Air Data, Cameron Hydraulic Data and Cameron Pump Operators' Data.....All three for $6.00.
- ☐ Compressed Air Data and Cameron Hydraulic Data..Both books for $5.00
- ☐ Cameron Hydraulic Data and Cameron Pump Operators' Data Both books for $4.50.
- ☐ Compressed Air Data and Cameron Pump Operators' Data Both books for $4.50.
- ☐ Enclosed is (money order) (check) for $.....) ☐ Send books C.O.D. I understand that the books will be sent me postpaid, and that they may be returned within 10 days if not satisfactory.

Name .....
Company .....
Street No. .....
City .....State .....Country .....

DRI AIR MAY BE INSTALLED BY SUSPENDING IT FROM THE PIPING WITHOUT ANY OTHER SUPPORT.

INCREASED PNEUMATIC EFFICIENCY WITH THIS AUTOMATIC SEPARATOR

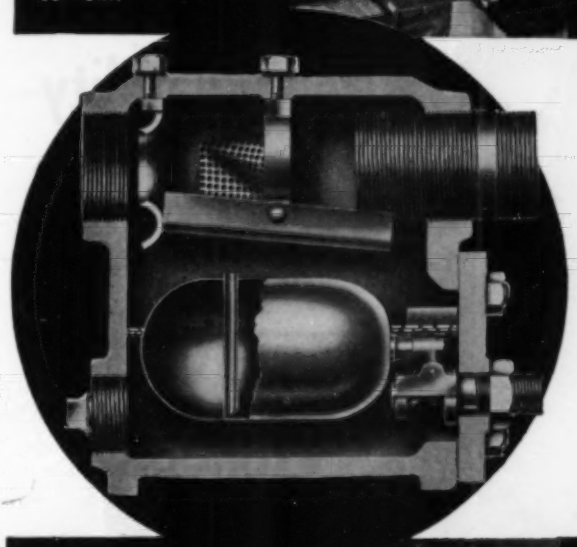

PROTECT EQUIPMENT WITH

DRIAIR

SEPARATES • COLLECTS • DELIVERS

• DriAir separates and automatically ejects the condensed water and oil from compressed air lines, collects pipe scale and rust, delivers clean dry air to tools and other pneumatic equipment. This promotes better lubrication, reduces wear, increases life of tools and produces greater output. All internal parts are made of bronze or copper—resistant to corrosion and practically permanent.

A TYPICAL INSTALLATION SHOWING DRI AIR STANDING ON A CONCRETE FLOOR NEXT TO THE WALL.

WRITE FOR BULLETIN DA WHICH FULLY DESCRIBES THE CONSTRUCTION AND OPERATION OF THE DRIAIR.

NEW JERSEY METER CO.

"SPECIALISTS IN COMPRESSED AIR DEVICES"

PLAINFIELD, NEW JERSEY

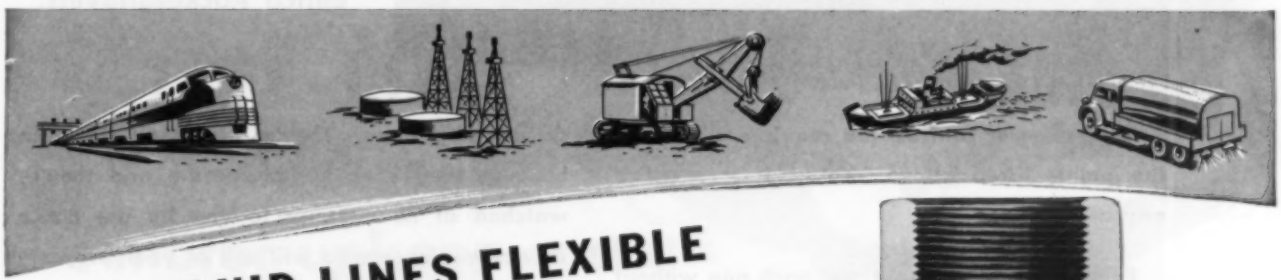

KEEP FLUID LINES FLEXIBLE WITH BARCO JOINTS

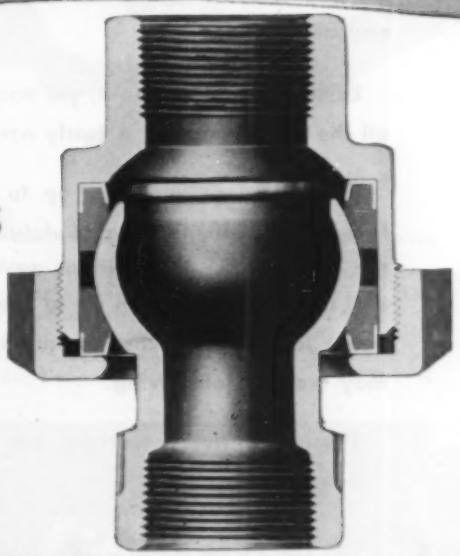

Operators of air, steam or hydraulic equipment find it necessary to have flexibility in their pipe lines to move the equipment while operating, or to take care of vibration, and prevent pipe breakage. There is no better way to accomplish this purpose than by the use of BARCO FLEXIBLE JOINTS, in connection with steel pipe. This combination will stand temperature, pressure, and abuse, which no other form of container will stand.

Millions of BARCO Joints are in service all over the world, and they will give you just as good service as they have given others. Ask for technical information on your specific problems, together with prices and recommendations. Write Barco Mfg. Co., 1837 Winnemac Ave., Chicago 40, Ill. In Canada: The Holden Co., Ltd., Montreal, Canada.

BARCO FLEXIBLE JOINTS

FREE ENTERPRISE—THE CORNERSTONE OF AMERICAN PROSPERITY

Not just a swivel joint ...but a combination of a swivel and ball joint with rotary motion and responsive movement through every angle.

"MOVE IN EVERY DIRECTION"

EIMCO *RockerShovels* - 5 point superiority

★Dependability
★Power
★ Speed
★ Safety
★ Economy

These are minimum requirements of a loading machine. All 5 are built into Eimco RockerShovels.

Your mine or contract job requires all five of the points listed above. You cannot sacrifice any of these features.

Each point is important, yet each one without all the others may be a costly omission.

Speed and power team up to clean out the face—they're time saving. Safety, protection for the operator — that's labor saving. Economy and Dependability team up to provide long life, better loading and cheaper maintenance—these may well be job saving.

These are the essentials, but RockerShovels do not stop there. They're easier on the man because they're easier to operate and they're watched at no expense to you by the Eimco service engineer who will call at your property if you wish.

Thousands of RockerShovels are moving dirt, rock and ore by the hundreds of thousands of tons every day. The users know why they have chosen Eimco RockerShovels — it is because in RockerShovels they have found the combination of all five points.

Write for information on Eimco RockerShovels.

for superior performance use EIMCO *RockerShovels*

EIMCO

THE EIMCO CORPORATION
The World's Largest Manufacturers of Underground Rock Loading Machines
EXECUTIVE OFFICES AND FACTORIES — SALT LAKE CITY 8, UTAH, U. S. A.
BRANCHES: NEW YORK, CHICAGO, BIRMINGHAM, EL PASO, SACRAMENTO, MANILA
AFFILIATED COMPANIES: SOCIETE EIMCO, PARIS, FRANCE
EIMCO (GREAT BRITAIN) LTD., LEEDS 12, ENGLAND
AGENTS IN ALL PRINCIPAL CITIES THROUGHOUT THE WORLD

YOU CAN BE **SURE**.. IF IT'S

Westinghouse

SAVING BY ELIMINATING LUBRICATION $270

SAVING INDICATED BY REDUCTION OF MOTOR OUTAGES $480

TOTAL SAVING $750

PER YEAR PER 100 MOTORS

NOW...

LIFE-LINE slashes a-c motor upkeep costs

Here's how Life-Line motors can save you half the upkeep cost, and more.

A recent survey of 114 large motor users—operating 131,626 a-c motors of 1 to 50 hp—shows how much motors *really* cost when you figure actual "Life Cost".

The survey shows that the yearly average cost of periodically lubricated motors was $270 for every hundred motors installed.

On lubrication cost alone, Life-Line motors saved this $270. That's because Life-Line requires no periodic lubrication—no added lubrication of any kind.

The survey also indicates that the yearly outage cost per hundred motors, for repairs and lost machine and man-hours, was $960.

The record of 500,000 Life-Line motors in service, to date, indicates a failure rate averaging less than half that of conventional motors covered by this survey. This means over 50% indicated reduction in motor outage costs—in short, a possible saving of $480 per year with Life-Line.

Add these savings—$270 for lubrication plus $480 for outages—and the result is $750 per hundred motors per year.

Can you afford to pass up savings like these? Get the facts on the savings possible in your plant. Ask your nearby Westinghouse representative for a copy of B-4321 "How to Cut Motor Costs $750". Or write Westinghouse Electric Corporation, P. O. Box 868, Pittsburgh 30, Pennsylvania. J-21514

Westinghouse *Life-Line* Motors

DON'T BLOW YOUR PROFITS AWAY!

Calculations show that the average compressor expense of air which is wasted through an opening only 1/16" in diameter costs $1.40 per eight hour day.

Leaks on any kind of a line whether air, steam, gases, of high or low pressure cost you money . . . money that should be carrying its share of power to your tools, helping your operators to get the best out of them.

For example, for manifold outlets on air compressors, specify LE-HI Series 100 Universal Type Hose Couplings. They're tough . . . can take abuse and couple or uncouple without a fight. Lower cost operation and production will result because these rugged hose couplings "cling" to the hose without danger of blowing off under constant vibration.

Why keep losing money because of improper hose fittings? Ask your distributor about LE-HI Hose Couplings . . . a complete line for industrial and construction use.

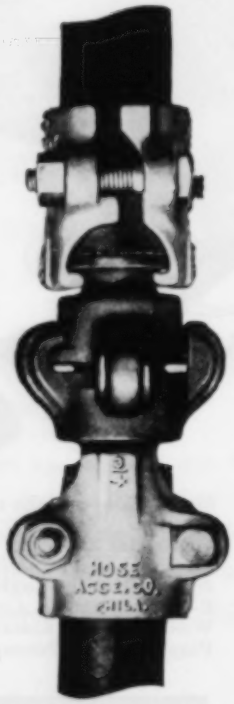

LE-HI Series 100 Universal Type Hose Couplings for a quick-acting connection on manifold outlets on air compressors and many special uses.

LE-HI Series 400 High Pressure Female Hose Coupling and companion Male Unit, Series 500. For use on High Pressure Air, or Steam Hose Lines or for Water Hose Service.

Send today for your copy of LE-HI Catalog No. 644.

SOLD ONLY THROUGH DISTRIBUTORS

HOSE ACCESSORIES CO.

2716 N. SEVENTEENTH STREET
PHILADELPHIA 32, PENNA.

LE-HI
HIGH and LOW PRESSURE
HOSE COUPLINGS

New MAGNETIC UNLOADER

CLASS 9045
TYPE BG

Provides POSITIVE unloading of air-compressor at end of operation or when voltage failure occurs

FEATURES



- Release valve is located conveniently on the side of the unloader enclosure. Moisture, condensed by the rapid expansion of the unloaded air, is blown into the atmosphere. The solenoid coil and interior working parts remain dry and free of moisture.
- Coils are available for use with all standard voltages and frequencies. Dual voltage coils are commonly furnished in 110/220 V and 220/440 V ratings.
- Magnetic unloaders can be furnished with either two-way or three-way valves. The two-way valve exhausts the air between check valve and compressor head directly into the atmosphere. The three-way valve serves as an auxiliary valve to provide actuating air for a compressor unloader.

Write for Bulletin 9045, Square D Company, 4041 N. Richards Street, Milwaukee 12, Wis.

SQUARE D COMPANY

DETROIT • MILWAUKEE • LOS ANGELES

Cut Drilling Costs Three Ways . . . With "MINE KING" *"Standard of Quality"* AIR HOSE

1. Lower hose replacement costs. "Mine King" is built to stay on the job longer, under severest working conditions.
2. Fewer connecting points and couplings. "Mine King" is available in extra long lengths.
3. Easier handling. Extreme flexibility facilitates drilling in "tight" spots and coiling for transport.



Contact our nearest Branch for details.

GOODALL RUBBER COMPANY

GENERAL OFFICES, MILLS and EXPORT DIVISION, TRENTON, N. J.

Branches: Philadelphia • New York • Boston • Pittsburgh • Chicago • St. Paul • Los Angeles
San Francisco • Seattle • Salt Lake City • Denver • Houston • Distributors in Other Principal Cities

Est. 1870

WITH THIS WISCONSIN HEAVY-DUTY Air-Cooled Engine Powered Welder

Whether in the field or inside the shop, the steady power of the Wisconsin air-cooled engine makes the P & H 200 Amp. NEMA-rated DC Arc Welder a reliable operating tool.

Regardless of the kind of power equipment you make, if a power unit within the 2 to 30 hp. range is indicated, your good name will be amply protected when you specify "Wisconsin Heavy-Duty Air-Cooled Engines". These engines "pay off" with users, in any climate, under the most rugged and adverse operating conditions. Heavy-duty design and construction details such as tapered roller bearings at BOTH ends of the husky crankshaft; rotary type high tension outside magneto with impulse coupling for quick, sure starting; pump lubrication with individual oil stream to each rod; a carburetor that functions at all operating angles . . . these are among the features that assure "Most H. P. Hours" of on-the-job service.

4-cycle single, 2- and 4-cylinder models, 2 to 30 hp.

WISCONSIN MOTOR CORPORATION

World's Largest Builders of Heavy-Duty Air-Cooled Engines

MILWAUKEE 14, WISCONSIN

---

for better, faster production

● Ideally used with shears, presses, forging machines and other machinery of all kinds because the operator has both hands free to handle the work. Features all service-proved Quick-As-Wink design and construction advantages. No metal-to-metal seating. No leakage or bleeding. ⅜"; ½"; ¾"; 1"; 1¼"; and 1½" sizes. 3-way and 4-way neutral position or regular actions.

Send for a catalog today—and get full details about the complete line.

Manufactured by* C. B. HUNT & SON, INC., *Salem, Ohio

ENGINEERING AND SALES REPRESENTATIVES IN THE PRINCIPAL CITIES

LET MAXIM EXPERIENCE GO TO WORK FOR YOU

EXHAUST AND INTAKE SILENCERS

. . . designed to silence the exhaust or intake of internal combustion engines, steam engine exhaust, air compressor intake, vacuum pump discharge and the intake or discharge of blowers.

SPARK ARRESTOR SILENCERS

. . . provide effective silencing of exhaust noise plus 100% spark arresting — for use where fire safety is imperative or where dirt nuisance must be eliminated.

STEAM BLOW-OFF SILENCERS

. . . developed to reduce to a minimum the discharge roar of high velocity steam, air or gas to atmosphere. They are used in installations involving steam blow-off, safety valve discharges, etc.



HEAT RECOVERY SILENCERS

. . . combining efficient silencing of engine exhaust noise with spark arresting (where necessary) and with the efficient recovery of waste exhaust heat to produce steam or hot water for heating or processing operations.

EVAPORATOR DISTILLERS

. . . produce fresh water to a purity of 3½ parts per million — capacity from 1100 gals. and up per day. ALL MONEL, high circulation rate means minimum scaling — easy descaling due to unique design.

DETAILED INFORMATION FOR THE ASKING

THE MAXIM SILENCER COMPANY

61 Homestead Ave. Hartford 1, Conn.

PLEASE SEND ME INFORMATION ON:

- ☐ EXHAUST AND INTAKE SILENCERS
- ☐ SPARK ARRESTOR SILENCERS
- ☐ STEAM BLOW-OFF SILENCERS
- ☐ HEAT RECOVERY SILENCERS
- ☐ EVAPORATOR DISTILLERS

Name_____

Address_____

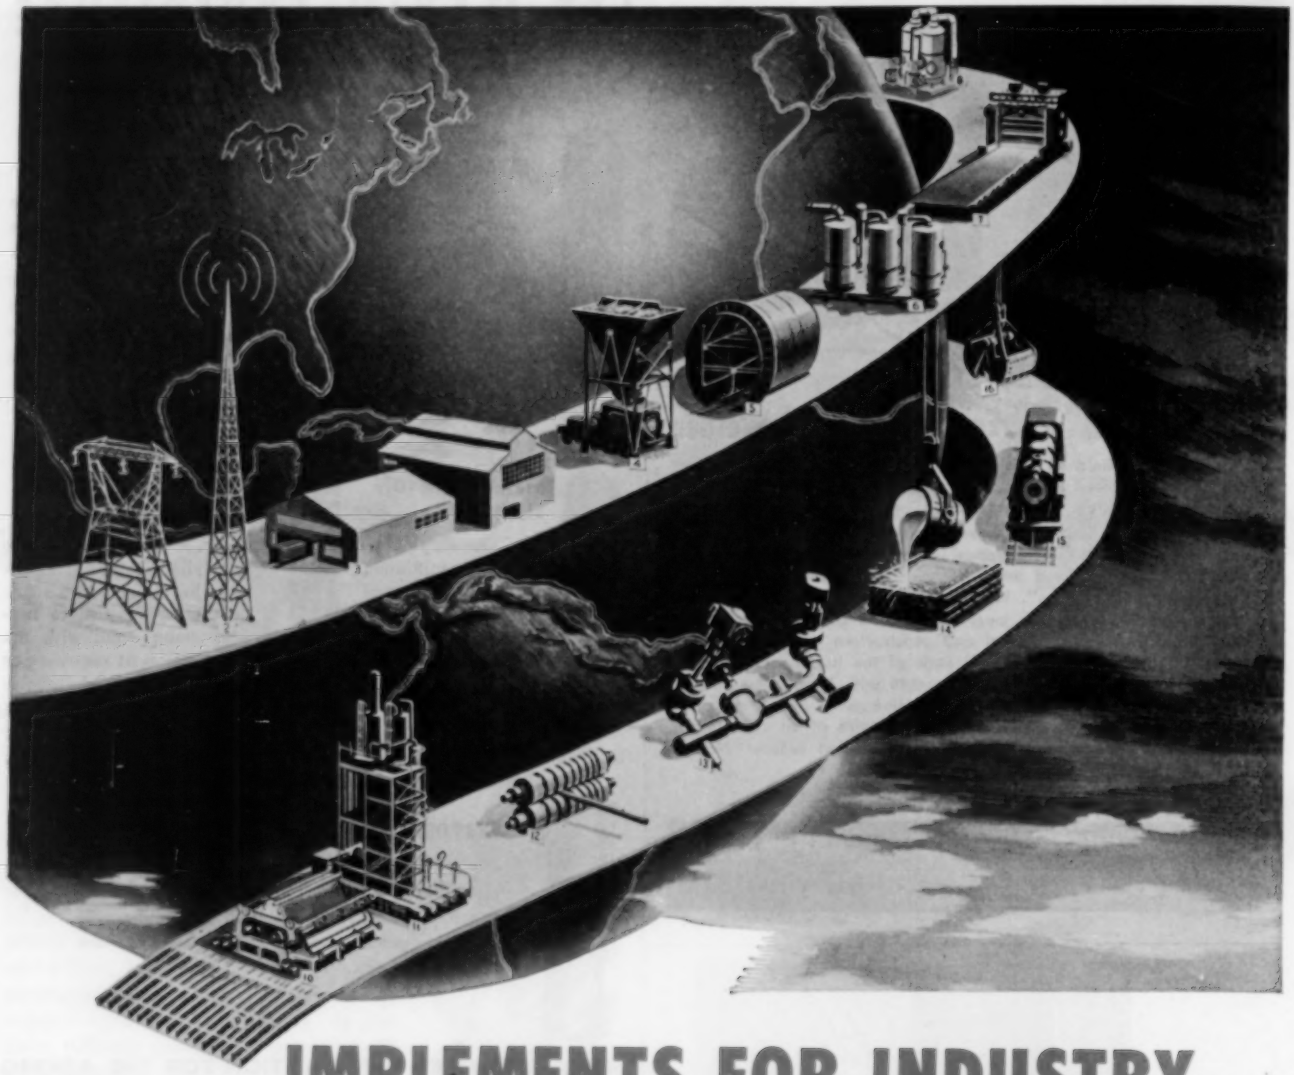

IMPLEMENTS FOR INDUSTRY

ALL OVER THE WORLD!

THE ILLUSTRATION presents a partial idea of Blaw-Knox Products and Services.

1. Transmission Towers
2. Towers for Broadcasting and Communications
3. Industrial Buildings
4. Construction Equipment
5. Steel Forms for Concrete Construction
6. Chemical and Process Equipment
7. Rolling Mills and Equipment
8. Gas Cleaners
9. Open Steel Flooring
10. Food Processing Machinery
11. Complete Chemical Plants
12. Rolls for Rolling Mills
13. Prefabricated Power Piping
14. Alloy Castings
15. Castings for Locomotive Frames, Crossheads and Wheel Centers
16. Clamshell Buckets

Practically everywhere in the world, Blaw-Knox engineering skill, facilities, products and "know-how" are serving industry.

If yours is a problem of low-cost production, modernization or new development — call on Blaw-Knox. Your inquiry will receive executive attention, regardless of where you may be located.

BLAW-KNOX COMPANY

PITTSBURGH, PENNSYLVANIA, U.S.A.

ADDRESS . . . BLAW-KNOX EXPORT DEPARTMENT • Section 2047 Canadian Pacific Bldg.
342 Madison Ave. • New York 17, New York CABLE ADDRESS: BLAWNOX, N. Y.

Fire this DOUBLE BARREL *at your production costs*

1 FULL AIR PRESSURE

Many plants are choking their production and their profits by operating Air Tools on insufficient air pressure. A seemingly small pressure drop of 10 pounds per square inch may cut a tool's productive power as much as 15 to 25%.

Industry is installing new and more Air Tools to reduce its production costs. Why not give these Air Tools a chance to give maximum performance? An I-R engineer will help you make a pressure check . . at the tools. If it's low, perhaps just a change of piping will correct it . . . larger pipe, or more direct, or new feeder lines. Or possibly you may need more compressor capacity. . . at the main plant or at booster stations.

2 MODERN COMPRESSORS

If you need a new compressor, you will want the *best* Ingersoll-Rand's "PRE" synchronous-motor-driven compressor (shown above) is the kind of machine that any plant engineer would be happy to operate . . . any company proud to own. These compressors are full of valuable features that you cannot buy in any other compressor ... features that save power, save maintenance. You can't afford to over-look the "PRE" in any modernization program.

"PRE" sizes range from 400 to 3000 horsepower, and if you need smaller compressors, or another type of drive, Ingersoll-Rand has it . . . whatever it is.

Ingersoll-Rand also builds a full line of Air Tools, Air Hoists, and Rock Drills for both production and maintenance work. And remember, Air-Power equipment pays for itself nearly twice as fast today.

AIR POWER
The Key to Lower Production Costs

Ingersoll-Rand

11 BROADWAY, NEW YORK 4, N. Y.

380-1

assure maximum compressor efficiency

Under All Conditions

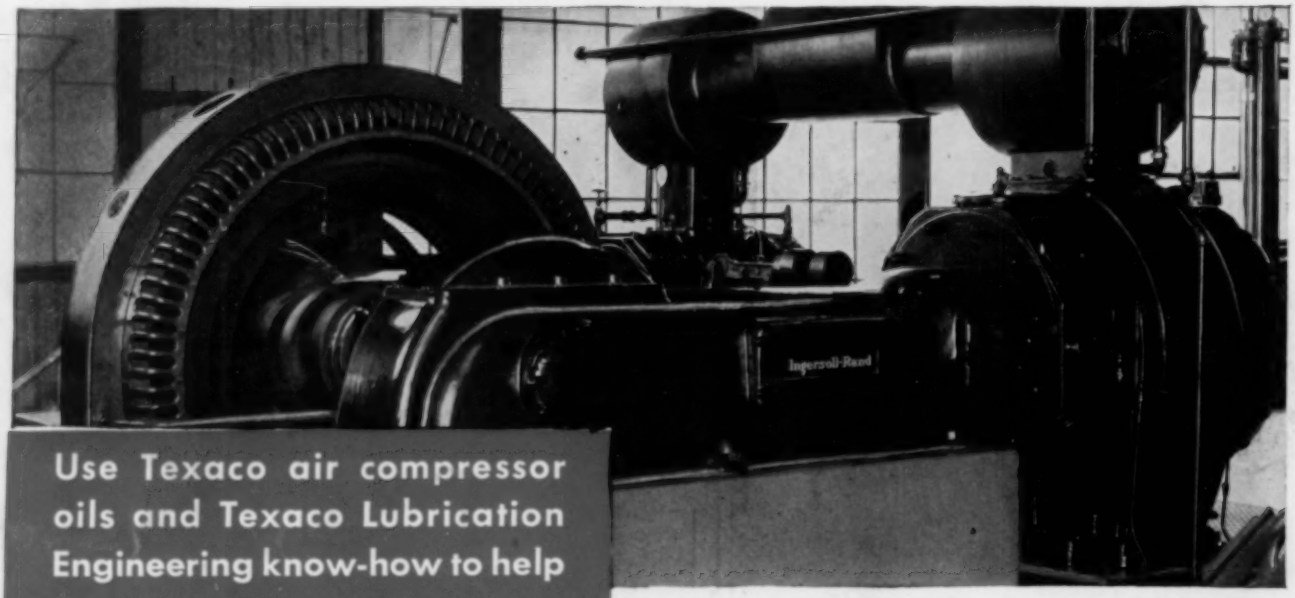

Use Texaco air compressor oils and Texaco Lubrication Engineering know-how to help improve your compressor operation.

Whatever the type or size of your compressors — whatever your operating conditions — there is a specific Texaco air compressor oil that will assure full volume and pressure, longer compressor life, minimum cost for maintenance.

Texaco has a *complete* line of air compressor oils — straight mineral oils for regular service . . . rust-inhibiting oils where rust is a threat . . . heavy-duty oils for unusually severe service, or where carbon and gum are problems . . . compounded oils where water is present — oils designed to prevent wear and to keep valves clean, rings free, ports open and air lines clear *under all operating conditions.*

Let a Texaco Lubrication Engineer help you select the Texaco air compressor oils you need to assure best results. Just call the nearest of the more than 2300 Texaco Wholesale Distributing Plants in the 48 States, or write: The Texas Company, 135 East 42nd Street, New York 17, New York.

TEXACO

TEXACO Air Compressor Oils

FOR ALL OPERATING CONDITIONS